


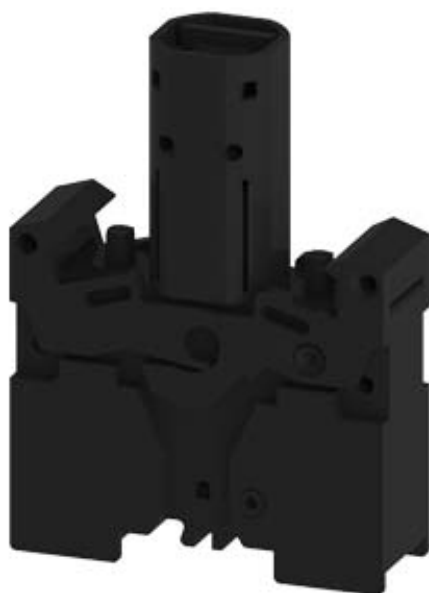

ACTUATOR-/INDICATOR COMPONENT WITH
INTEGRATED LED 230V AC LAMP HOLDER SPRING-
LOADED TERMINAL RED FOR MOUNTING ON FRONT
PLATE

Contact block/ lampholder:

Product designation		lampholder
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of changeover contacts / for auxiliary contacts		0
Product function / positive opening		No
Number of lampholders		1
Execution of the mounting		integrated
Nature of fluorescent material		LED
Color / of the fluorescent material		red
Design of the electrical connection		spring-loaded terminals

General technical data:

Degree of pollution		class 3
Type of voltage / of the supply voltage / of light source		AC
Supply voltage / 1 / of the fluorescent material		
• at 60 Hz / for AC / rated value	V	230
• at 50 Hz / for AC / rated value	V	230
Voltage type / of operating voltage		AC
Reference code		
• according to DIN EN 61346-2		P

• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		H
Ambient temperature		
• during operating	°C	-25 ... +70
• during storage	°C	-25 ... +80
protection type IP		
• of the terminal		IP20
• of the enclosure		IP40
Operating voltage / 1 / at 50 Hz / for AC / rated value	V	230
Operating voltage / 1 / at 60 Hz / for AC / rated value	V	230
Suitability for integration		
• pressure selection button		Yes
• front element		Yes
• suspension switch		Yes
• suspension pushbutton		Yes
Insulation voltage / rated value	V	400
Impulse voltage resistance / rated value	kV	4
Product component		
• fluorescent materials		Yes
• diode		Yes
• lamp transformer		No
• series resistance		No
Mounting type		front mounting
Width	mm	10
Height	mm	30
Depth	mm	20.7



Connections/ terminals:

Type of the connectable conductor cross-section


• for auxiliary contacts / solid	2x (0.25 ... 1.5 mm²)
• for auxiliary contacts / finely stranded / with conductor end processing	2x (0.25 ... 0.75 mm²)
• for auxiliary contacts / finely stranded / without conductor final cutting	2x (0.25 ... 1.5 mm²)
• for AWG conductors / for auxiliary contacts	2x (24 ... 16)

Certificates/ approvals:

General Product Approval		Declaration of Conformity	Test Certificates	
 CCC	 CSA	 EAC	 EG-Konf.	Special Test Certificate
other				
Confirmation		Environmental Confirmations		
Further information:				
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs				
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall				
Cax online generator http://www.siemens.com/cax				
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3SB3403-1RB/all				
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3403-1RB				

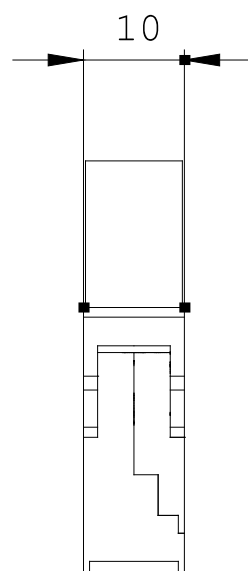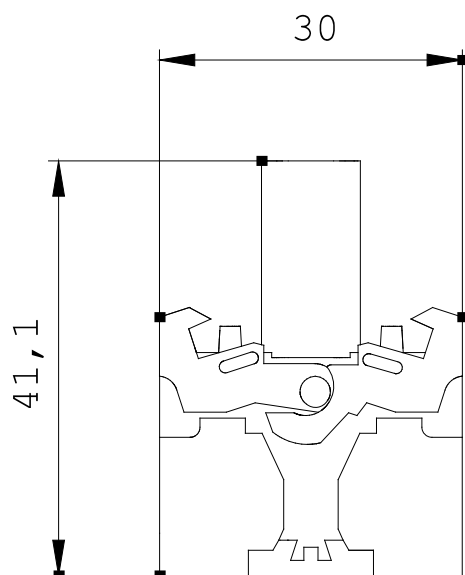

\p
\p

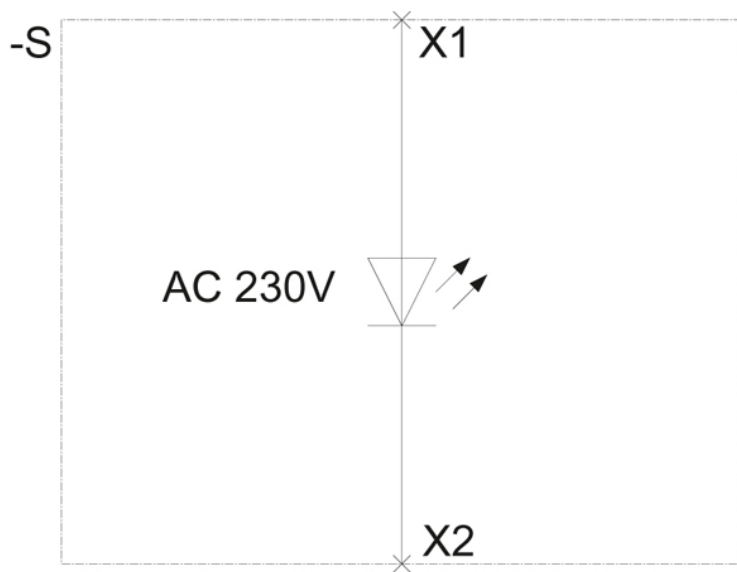

last change:

Jul 7, 2014