# **SIEMENS**

Product data sheet 3SB3500-0AA11

22MM METAL ROUND ACTUATOR: PUSHBUTTON WITH FLAT BUTTON WITH HOLDER BLACK SOLVENT-RESISTANT

Actuator / signaling device:		
Design of the product		Single device round
Design of the operating mechanism		Pushbutton
External diameter / of the activation element	mm	28.5
Type of unlocking device		without
Color / of the activation element	-	black
Material / of the activation element		plastic
Shape / of the activation element	_	Flat pushbutton
Number of switching positions	_	2
Product component / front ring		Yes
Material / of the front ring	_	metal
Color / of the front ring	_	silver
Design of the front ring		Standard
Product function / EMERGENCY STOP function		No
Holder:		
Material / of the holder		Metal
General technical details:		
Resistance against shock		
<ul> <li>for devices without incandescent lamp / according to IEC 60068- 2-27</li> </ul>		<= 50g
Resistance against vibration / according to IEC 60068-2-6	_	20 200 Hz: 5g
Resistance against vibration / according to IEC 60068-2-6  Operating cycles / maximum	1/h	20 200 Hz: 5g 1,000
	1/h	
Operating cycles / maximum	1/h	1,000
Operating cycles / maximum  Mechanical operating cycles as operating time / typical	1/h	1,000
Operating cycles / maximum  Mechanical operating cycles as operating time / typical  Product extension / optional / fluorescent materials	1/h	1,000
Operating cycles / maximum  Mechanical operating cycles as operating time / typical  Product extension / optional / fluorescent materials  Item designation	1/h	1,000 10,000,000 No
Operating cycles / maximum  Mechanical operating cycles as operating time / typical  Product extension / optional / fluorescent materials  Item designation  • according to DIN EN 61346-2  • according to DIN 40719 extendable after IEC 204-2 / according	1/h N·m	1,000 10,000,000 No
Operating cycles / maximum  Mechanical operating cycles as operating time / typical  Product extension / optional / fluorescent materials  Item designation  • according to DIN EN 61346-2  • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		1,000 10,000,000 No S S
Operating cycles / maximum  Mechanical operating cycles as operating time / typical  Product extension / optional / fluorescent materials  Item designation  • according to DIN EN 61346-2  • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750  Tightening torque / of the screws in the bracket / maximum		1,000 10,000,000 No S S

during storage	°C	-40 +80
Protection class IP		IP67
climatic class / during the operating phase / according to EN 60721		3K6
Type of mounting		front mounting
Shape / of the installation hole		round
Installation width	mm	28.5
Mounting diameter	mm	22
Mounting height	mm	12
Mounting depth	mm	29

## Certificates/approvals:

#### **General Product Approval**







Test Certificates

Special Test

# Shipping Approval









Certificate



other

Confirmation

other

Environmental Confirmations

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator:


http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

 $\underline{\text{http://support.automation.siemens.com/WW/view/en/3SB3500-0AA11/all}}$ 

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ ...)$ 

http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3SB3500-0AA11

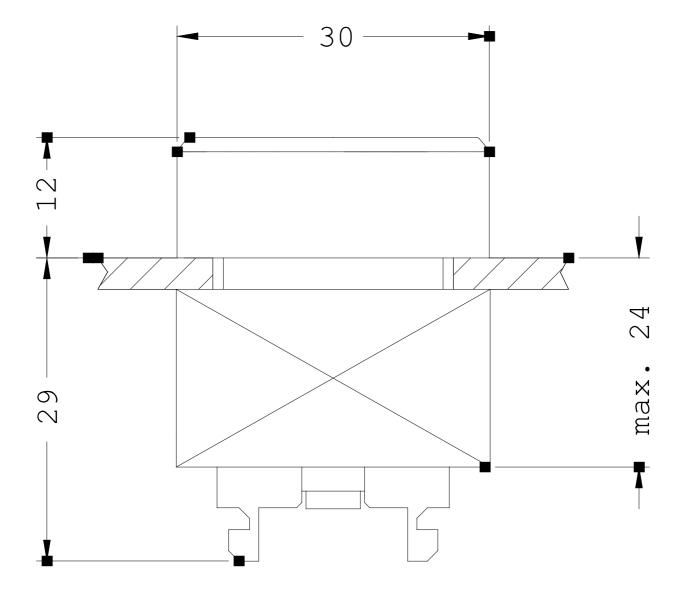

last change: Jan 21, 2013