

22MM METAL ROUND ACTUATOR: EMERGEN.-STOP
MUSHR.PUSHB. 40MM WITH RONIS KEY-OPER.SWITCH
LATCHING WITH KEY-OPER.SWITCH- UNLOCKING LOCK NO
SB31 WITH HOLDER RED Z= 20 UNITS PACKED POSSIBLE
SPECIAL CLOSURES: 3SB31, 421, 455



Figure similar

Design of the product	Single device round with positive latching in accordance with ISO 13850
Enclosure:	
Number of command points	1
Actuator:	
Design of the operating mechanism	Emergency stop mushroom pushbutton with lock
Manner of function of the actuating element	Latching
Product extension optional Light source	No
Color	
• of the actuating element	Red
Material of the actuating element	plastic
Outer diameter of the actuating element	40 mm
Type of unlocking device	key unlatching
Number of switching positions	2
Switch position for key distraction	O+I
Lock make	RONIS
Front ring:	

Product component front ring	No
Holder:	
Material of the holder	Metal
General technical data:	
Product function	
• EMERGENCY OFF function	Yes
• EMERGENCY STOP function	Yes
Protection class IP	IP67
Vibration resistance	
• acc. to IEC 60068-2-6	20 ... 200 Hz: 5g
Operating frequency maximum	1 000 1/h
Mechanical service life (switching cycles)	
• typical	300 000
Equipment marking	
• acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	S
• acc. to DIN EN 61346-2	S
• acc. to DIN EN 81346-2	S
Connections/ Terminals:	
Tightening torque of the screws in the bracket	1.4 ... 1.6 N·m
Safety related data:	
B10 value	
• with high demand rate acc. to SN 31920	100 000
Proportion of dangerous failures	
• with low demand rate acc. to SN 31920	20 %
• with high demand rate acc. to SN 31920	20 %
Failure rate [FIT]	
• with low demand rate acc. to SN 31920	100 FIT
T1 value for proof test interval or service life acc. to IEC 61508	20 y
Ambient conditions:	
Ambient temperature	
• during operation	-25 ... +70 °C
• during storage	-40 ... +80 °C
Environmental category during operation acc. to IEC 60721	3K6
Installation/ mounting/ dimensions:	
Mounting type	front mounting
Shape of the installation opening	round
Mounting diameter	22 mm

Mounting height	71 mm
Installation width	40.5 mm
Installation depth	29 mm

Certificates/approvals

General Product Approval			Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates
					spezielle Prüfbescheinigungen
CSA	UL		VDE	EG-Konf.	n

Shipping Approval					other
					Bestätigungen
ABS	DNV	LRS	PRS	RINA	

other	
Umweltbestätigung	sonstig

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3500-1BA20-Z X90>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-1BA20-Z X90>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-1BA20-Z X90>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB3500-1BA20-Z X90&lang=en

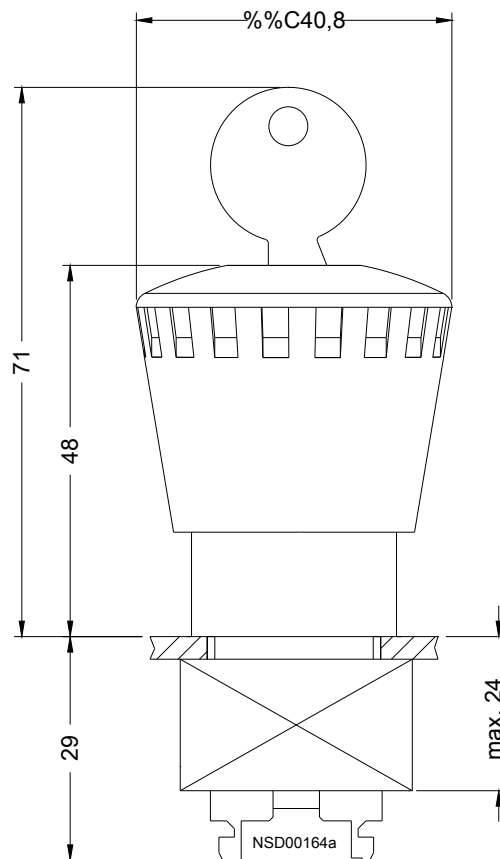

last modified:

08/18/2016