SIEMENS

Product data sheet 3SB3500-1HA20-0PA0

ROUND ACTUATOR EMERG. STOP TURN-TO-RESET, 40MM W. TAMPER PROTECTION LATCHING, W. HOLDER, NOT ILLUMIN., METAL, RED SOLVENT-RESISTANT

	RED SOLVENT-RESISTANT			
Actuator / signaling device:				
Design of the product		Single device round with positive latching in accordance with ISO 13850		
Design of the operating mechanism		Emergency stop mushroom pushbutton		
External diameter / of the activation element	mm	40		
Type of unlocking device		rotate-to-unlatch mechanism		
Color / of the activation element		Red		
Material / of the activation element		plastic		
Number of switching positions		2		
Product component / front ring		No		
Product function / EMERGENCY STOP function		Yes		
Holder:				
Material / of the holder		Metal		
General technical details:				
Resistance against shock				
 for devices without incandescent lamp / according to IEC 60068- 2-27 		<= 50g		

General technical details:		
Resistance against shock		
 for devices without incandescent lamp / according to IEC 60068- 2-27 		<= 50g
Resistance against vibration / according to IEC 60068-2-6		20 200 Hz: 5g
Operating cycles / maximum	1/h	1,000
Mechanical operating cycles as operating time / typical		300,000
Product extension / optional / fluorescent materials		No
Item designation		
according to DIN EN 61346-2		S
 according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		S
Tightening torque / of the screws in the bracket / maximum	N⋅m	1
Ambient temperature		
during operating	°C	-25 +70
during storage	°C	-40 +80
Protection class IP		IP67
B10 value / with high demand rate / according to SN 31920		100,000

Proportion of dangerous failures		
 with high demand rate / according to SN 31920 	%	20
 with low demand rate / according to SN 31920 	%	20
Failure rate (FIT value) / with low demand rate / according to SN 31920	FIT	100
T1 value / for proof test interval or service life / according to IEC 61508	а	20
climatic class / during the operating phase / according to EN 60721		3K6
Type of mounting		front mounting
Shape / of the installation hole		round
Installation width	mm	40.5
Mounting diameter	mm	22
Mounting height	mm	49
Mounting depth	mm	29

Certificates/approvals:

General Product Approval







Special Test Certificate

Shipping Approval











other

Confirmation

other

Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator:


http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

 $\underline{\text{http://support.automation.siemens.com/WW/view/en/3SB3500-1HA20-0PA0/all}}$

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3500-1HA20-0PA0}$

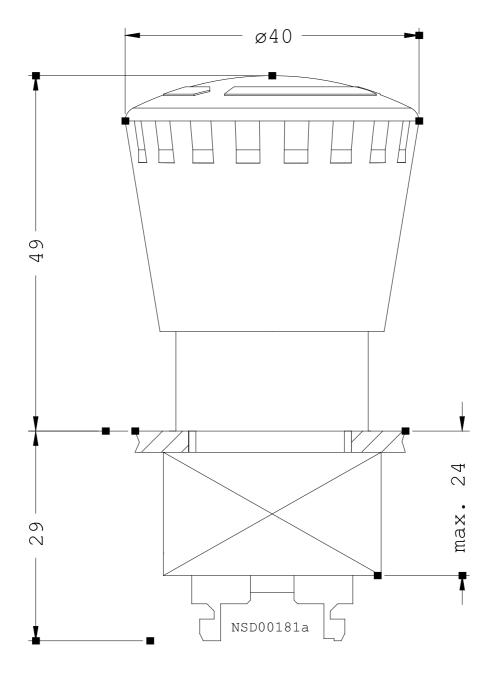

last change: Jan 21, 2013