

22MM METAL ROUND ACTUATOR: EMERGEN.-STOP
MUSHR.PUSHB. 40MM WITH IKON KEY-OPER.SWITCH
LATCHING WITH KEY-OPER.SWITCH- UNLOCKING LOCK NO
360012K1 WITH HOLDER RED Z= 20 UNITS PACKED

Design of the product	Single device round with positive latching in accordance with ISO 13850
-----------------------	---

Enclosure:

Number of command points	1
--------------------------	---

Actuator:

Design of the operating mechanism	Emergency stop mushroom pushbutton with lock
Manner of function of the actuating element	Latching
Product extension optional Light source	No
Color	
• of the actuating element	Red
Material of the actuating element	plastic
Outer diameter of the actuating element	60 mm
Type of unlocking device	key unlatching
Number of switching positions	2
Switch position for key distraction	O
Lock make	ICON

Front ring:

Product component front ring	No
------------------------------	----

Holder:

Material of the holder	Metal
------------------------	-------

General technical data:

Product function	
• EMERGENCY OFF function	Yes
• EMERGENCY STOP function	Yes
Protection class IP	IP67
Vibration resistance	
• acc. to IEC 60068-2-6	20 ... 200 Hz: 5g
Operating frequency maximum	1 000 1/h
Mechanical service life (switching cycles)	
• typical	300 000
Equipment marking	
• acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	S

- acc. to DIN EN 61346-2
- acc. to DIN EN 81346-2

S
S

Connections/ Terminals:

Tightening torque of the screws in the bracket 1.4 ... 1.6 N·m

Safety related data:

B10 value

- with high demand rate acc. to SN 31920 100 000

Proportion of dangerous failures

- with low demand rate acc. to SN 31920 20 %
- with high demand rate acc. to SN 31920 20 %

Failure rate [FIT]

- with low demand rate acc. to SN 31920 100 FIT

T1 value for proof test interval or service life acc. to IEC 61508

20 y

Ambient conditions:

Ambient temperature

- during operation -25 ... +70 °C
- during storage -40 ... +80 °C

Environmental category during operation acc. to IEC 60721

3K6

Installation/ mounting/ dimensions:

Mounting type	front mounting
Shape of the installation opening	round
Mounting diameter	22 mm
Mounting height	80 mm
Installation width	40.5 mm
Installation depth	29 mm

Certificates/approvals

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates
--------------------------	---------------------------------------	---------------------------	-------------------



CSA



UL



VDE



EG-Konf.

[spezielle
Prüfbescheinigunge
n](#)

Shipping Approval	other
-------------------	-------



ABS



DNV



LRS



PRS



RINA

[Bestätigungen](#)

other

[Umweltbestätigung](#)

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3500-1UA20-Z X90>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-1UA20-Z X90>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-1UA20-Z X90>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB3500-1UA20-Z X90&lang=en

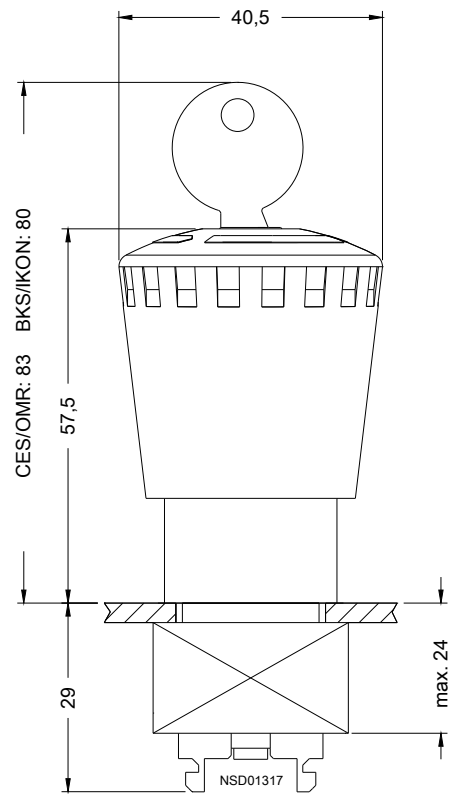

last modified:

08/18/2016