


22MM METAL ROUND ACTUATOR: OMR KEY-  
OPER.SWITCH W. 2 KEYS MOMENTARY CONTACT  
TYPE 2 SWITCH POSITIONS O-I LOCK NO 73034,  
REMOVAL POS. O WITH HOLDER BLACK



| Actuator:                                     |    |                        |
|-----------------------------------------------|----|------------------------|
| Design of the product                         |    | Single device round    |
| Design of the operating mechanism             |    | Key-operated switch    |
| External diameter / of the activation element | mm | 28.5                   |
| Functionality / of the actuator               |    | Momentary contact type |
| Type of unlocking device                      |    | without                |
| Color / of the activation element             |    | black                  |
| Material / of the activation element          |    | plastic                |
| Make of the lock                              |    | O.M.R.                 |
| Number of switching positions                 |    | 2                      |
| Switch position for key distraction           |    | O                      |
| Actuating angle                               |    |                        |
| • clockwise                                   | °  | 50                     |
| Product component / front ring                |    | Yes                    |
| Material / of the front ring                  |    | metal                  |
| Color / of the front ring                     |    | silver                 |
| Design of the front ring                      |    | Standard               |
| Product function / EMERGENCY STOP function    |    | No                     |

| Holder: |
|---------|
|---------|

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|---------------------------------------------|
| Material / of the holder                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                           | Metal                                       |
| General technical data:                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                           |                                             |
| Resistance against shock <ul style="list-style-type: none"> <li>for devices without incandescent lamp / according to IEC 60068-2-27</li> </ul>                                                                                                                                                                                                                                                                                                                            |                           | <= 50g                                      |
| Resistance against vibration / according to IEC 60068-2-6                                                                                                                                                                                                                                                                                                                                                                                                                 |                           | 20 ... 200 Hz: 5g                           |
| Operating cycles / maximum                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1/h                       | 1,000                                       |
| Mechanical operating cycles as operating time / typical                                                                                                                                                                                                                                                                                                                                                                                                                   |                           | 300,000                                     |
| Product extension / optional / fluorescent materials                                                                                                                                                                                                                                                                                                                                                                                                                      |                           | No                                          |
| Reference code <ul style="list-style-type: none"> <li>according to DIN EN 61346-2</li> <li>according to DIN 40719 extended according to IEC 204-2 / according to IEC 750</li> </ul>                                                                                                                                                                                                                                                                                       |                           | S<br>S                                      |
| Tightening torque / of the screws in the bracket / maximum                                                                                                                                                                                                                                                                                                                                                                                                                | N·m                       | 1                                           |
| Ambient temperature <ul style="list-style-type: none"> <li>during operating</li> <li>during storage</li> </ul>                                                                                                                                                                                                                                                                                                                                                            | °C<br>°C                  | -25 ... +70<br>-40 ... +80                  |
| Protection class IP                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                           | IP67                                        |
| climatic class / during the operating phase / according to EN 60721                                                                                                                                                                                                                                                                                                                                                                                                       |                           | 3K6                                         |
| Mounting type                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                           | front mounting                              |
| Shape / of the installation hole                                                                                                                                                                                                                                                                                                                                                                                                                                          |                           | round                                       |
| Installation width                                                                                                                                                                                                                                                                                                                                                                                                                                                        | mm                        | 28.5                                        |
| Mounting diameter                                                                                                                                                                                                                                                                                                                                                                                                                                                         | mm                        | 22                                          |
| Mounting height                                                                                                                                                                                                                                                                                                                                                                                                                                                           | mm                        | 64                                          |
| Mounting depth                                                                                                                                                                                                                                                                                                                                                                                                                                                            | mm                        | 29                                          |
| Certificates/ approvals:                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                           |                                             |
| General Product Approval                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Declaration of Conformity | Test Certificates                           |
| <br>CSA <br>EAC <br>UL <br>EG-Konf. <a href="#">Special Test Certificate</a>                                                  |                           |                                             |
| Shipping Approval                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |                                             |
| <br>ABS <br>DNV <br>LRS <br>PRS <br>RINA |                           |                                             |
| other                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                           |                                             |
| <a href="#">Confirmation</a>                                                                                                                                                                                                                                                                                                                                                                                                                                              | <a href="#">other</a>     | <a href="#">Environmental Confirmations</a> |
| Further information:                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                           |                                             |

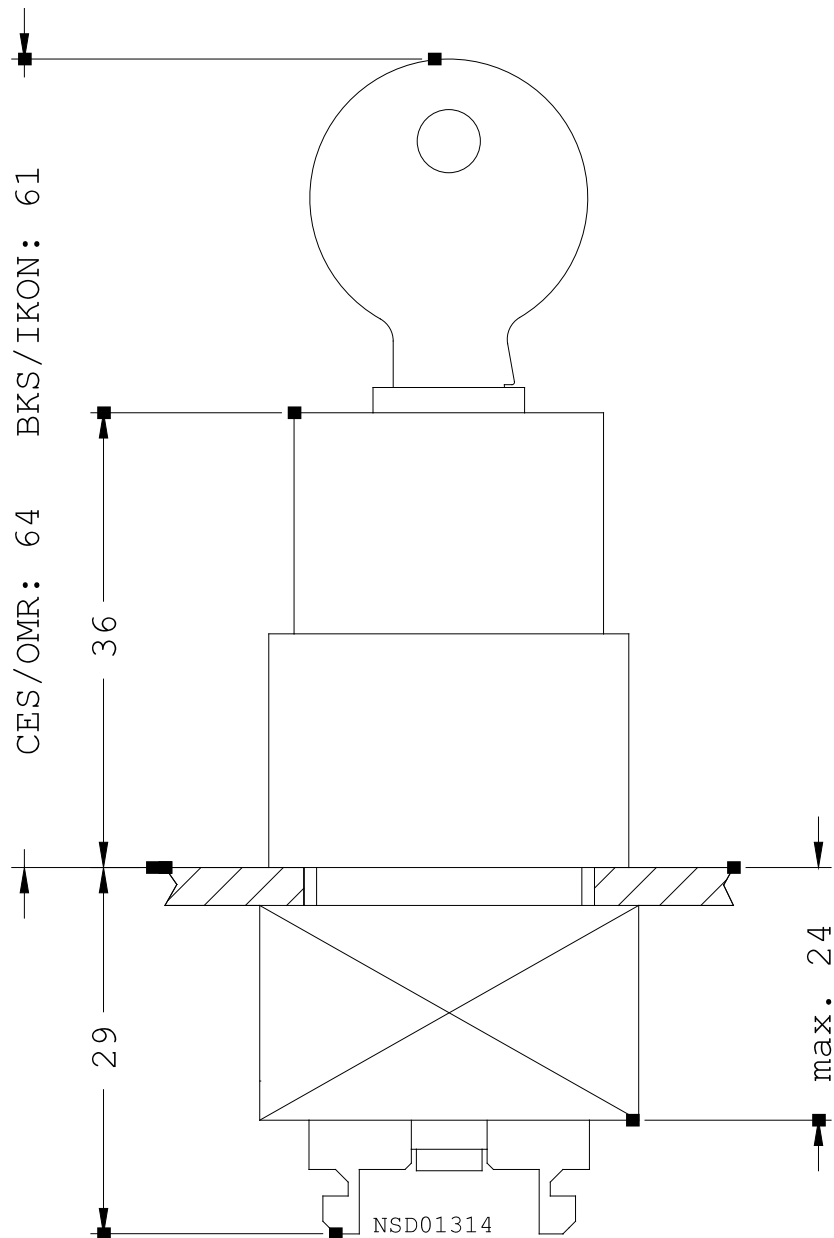

last change:

Jul 7, 2014