SIEMENS

Product data sheet 3SB3501-3SA51



22MM METAL ROUND ACTUATOR: SELECTOR SWITCH LONG HANDLE LATCHING 3 SWITCH POSITIONS I-O-II ILLUMINABLE WITH HOLDER BLUE

Actuator:			
Design of the product		Single device round	
Design of the operating mechanism		selector switch	
External diameter / of the activation element	mm	28.5	
Functionality / of the actuator		Latching	
Type of unlocking device		rotate-to-unlatch mechanism	
Color / of the activation element		Blue	
Material / of the activation element		plastic	
Shape / of the activation element		Extended handle	
Number of switching positions		3	
Actuating angle			
• clockwise	0	50	
• anticlockwise	o	50	
Product component / front ring		Yes	
Material / of the front ring		metal	
Color / of the front ring		silver	
Design of the front ring		Standard	
Product function / EMERGENCY STOP function		No	

Holder

Resistance against shock of the devices with incandescent lamp / according to IEC 60068-2-27 continuous series without incandescent lamp / according to IEC 60068-2-27 continuous series without incandescent lamp / according to IEC 60068-2-27 continuous series without incandescent lamp / according to IEC 60068-2-6 continuous series s				
• for devices with incandescent lamp / according to IEC 60068-2- 27 • for devices without incandescent lamp / according to IEC 60068- 2-27 Resistance against vibration / according to IEC 60068-2-6 Operating cycles / maximum 1/h 1,000 Mechanical operating cycles as operating time / typical Product extension / optional / fluorescent materials Reference code	General technical data:			
• for devices without incandescent lamp / according to IEC 60068- 2-27 Resistance against vibration / according to IEC 60068-2-6 Operating cycles / maximum 1/h 1,000 Mechanical operating cycles as operating time / typical Product extension / optional / fluorescent materials Reference code				
2-27 Resistance against vibration / according to IEC 60068-2-6 Operating cycles / maximum 1/h 1,000 Mechanical operating cycles as operating time / typical Product extension / optional / fluorescent materials Reference code				
Operating cycles / maximum 1/h 1,000 Mechanical operating cycles as operating time / typical 300,000 Product extension / optional / fluorescent materials Yes Reference code				
Mechanical operating cycles as operating time / typical 300,000 Product extension / optional / fluorescent materials Yes Reference code				
Product extension / optional / fluorescent materials Yes Reference code				
Reference code				
a according to DIN EN 61246.2				
* according to bits Ets 01540-2				
according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 S				
Tightening torque / of the screws in the bracket / maximum N·m 1				
Ambient temperature				
• during operating °C -25 +70				
• during storage °C -40 +80				
Protection class IP IP67				
climatic class / during the operating phase / according to EN 3K6 60721				
Mounting type front mounting				
Shape / of the installation hole round				
Installation width mm 37				
Mounting diameter mm 22				
Mounting height mm 28				
Mounting depth mm 29				

Certificates/ approvals:

General Product Approval

Declaration of Conformity

Test Certificates









Special Test Certificate

Shipping Approval











other

Confirmation

other

Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator


http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3SB3501-3SA51/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3501-3SA51}}$

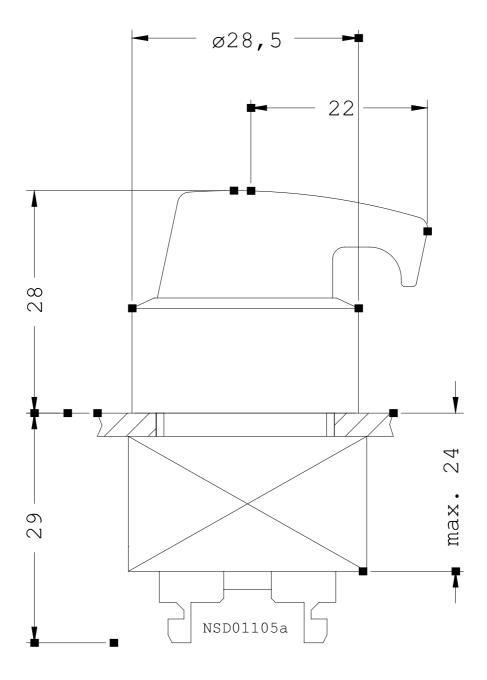

last change: Jul 7, 2014