



22MM METAL ROUND COMPLETE UNIT COMBINATION:  
INDICATOR LIGHT WITH CONCENTRIC RINGS NON-ILLUMINATED WITH LAMP HOLDER BA 9S WITHOUT LAMP SCREW TERMINAL WITH HOLDER AMBER

### Enclosure:

|                               |       |
|-------------------------------|-------|
| Material / of the enclosure   | metal |
| Form / of the enclosure front | round |

### Actuato/ signaling device:

|                                   |                     |
|-----------------------------------|---------------------|
| Design of the product             | Complete unit round |
| Design of the operating mechanism | indicator light     |
| Type of unlocking device          | without             |
| Color / of the activation element | Amber               |
| Shape / of the activation element | Concentric rings    |
| Number of switching positions     | 0                   |
| Product component / front ring    | No                  |

### Holder:

|                          |       |
|--------------------------|-------|
| Material / of the holder | Metal |
|--------------------------|-------|

### Contact block/ lampholder:

|                                                |                      |
|------------------------------------------------|----------------------|
| Design of the electrical connection            | screw-type terminals |
| Number of switching elements                   | 0                    |
| Number of NC contacts / for auxiliary contacts | 0                    |
| Number of NO contacts / for auxiliary contacts | 0                    |

|                                                        |  |                     |
|--------------------------------------------------------|--|---------------------|
| Number of changeover contacts / for auxiliary contacts |  | 0                   |
| Product function / positive opening                    |  | No                  |
| Number of lampholders                                  |  | 1                   |
| Execution of the mounting                              |  | BA 9s, without lamp |
| Product component / fluorescent materials              |  | No                  |
| Product extension / optional / fluorescent materials   |  | Yes                 |

#### Accessories:

Product component / holder for 3 switching elements

No

#### General technical details:

|                                                                                 |     |                   |
|---------------------------------------------------------------------------------|-----|-------------------|
| Voltage type / of operating voltage                                             |     | AC/DC             |
| Operating voltage                                                               |     |                   |
| • rated value                                                                   | V   | 5 ... 400         |
| Resistance against shock                                                        |     |                   |
| • for devices with incandescent lamp / according to IEC 60068-2-27              |     | <= 30g            |
| Operating current                                                               |     |                   |
| • for devices without incandescent lamp / according to IEC 60068-2-27           |     | <= 50g            |
| Resistance against vibration / according to IEC 60068-2-6                       |     | 20 ... 200 Hz: 5g |
| Reference code                                                                  |     |                   |
| • according to DIN EN 61346-2                                                   |     | P                 |
| • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 |     | H                 |
| Tightening torque / of the screws in the bracket / maximum                      | N·m | 1                 |
| • during operating                                                              | °C  | -25 ... +60       |
| • during storage                                                                | °C  | -40 ... +80       |
| Protection class IP                                                             |     | IP67              |
| climatic class / during the operating phase / according to EN 60721             |     | 3K6               |
| Mounting type                                                                   |     | front mounting    |
| Shape / of the installation hole                                                |     | round             |
| Installation width                                                              | mm  | 28                |
| Mounting diameter                                                               | mm  | 22                |
| Mounting height                                                                 | mm  | 11                |
| Mounting depth                                                                  | mm  | 49                |

#### Certificates/ approvals:

**General Product Approval****Test Certificates**

[Special Test Certificate](#)

**Shipping Approval****other**

[Confirmation](#)

[other](#)

[Environmental Confirmations](#)

**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**Cax online generator**



<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3SB3604-6BA00/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3SB3604-6BA00](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3604-6BA00)

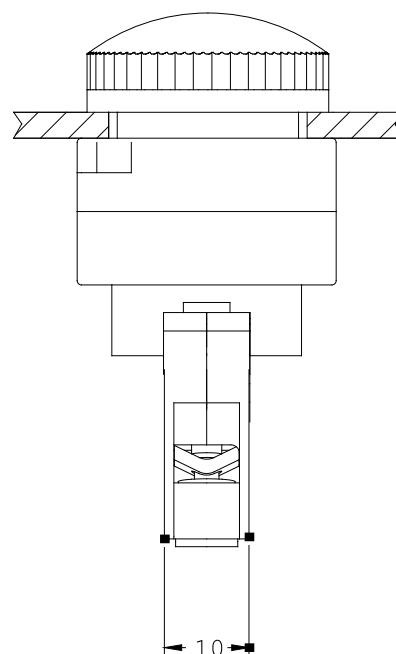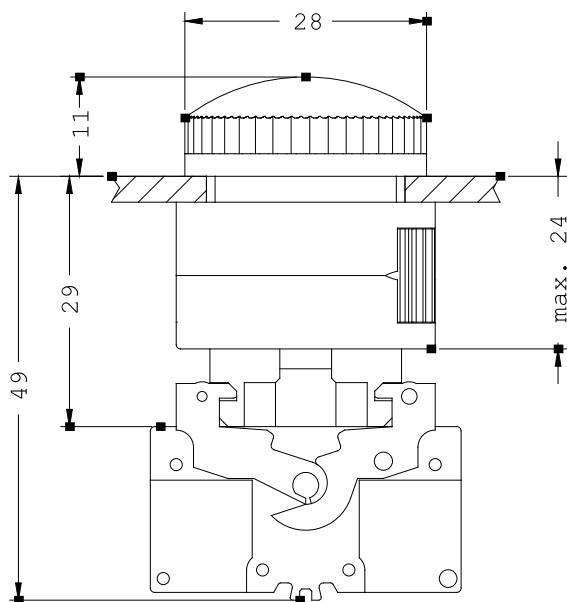

last change:

Jul 7, 2014