SIEMENS

Product data sheet 3SE3902-4CB20

FOOT-OPERATED SWITCH MOULDED-PLASTIC ENCLOSURE PEDAL PUSHBUTTON, ONE PEDAL WITHOUT COVER, 1 CO

General technical details:		
Product designation		momentary-contact foot switch
Product equipment / interlock		No
Product equipment / notch		No
Product component / covering		No
Operating current / at AC-15 / at 230 V / rated value	А	5
Number of switching steps		1
Nature of command		on or off
Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		S
Reference code / according to DIN EN 61346-2		S
Mounting type		screw fixing
Width	mm	71
Height	mm	96
Depth	mm	27
Enclosure:		
Material / of the enclosure		plastic with total insulation
Color		black
Color / of the housing		black
Color / of top part of the enclosure		black
Cable gland version		cable, 3 m
Drive Head:		
Number of the activation pedals		1
Contact:		
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of changeover contacts / for auxiliary contacts		1
Ambient conditions:		
Protection class IP		IP65
Ambient temperature		

• during operating °C 75 ... -10

Certificates/approvals:

Suitability for use / safety cut-out switch No

Certificates/approvals:

General Product Approval

Declaration of Conformity







Shipping Approval









other

Confirmation

other

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

CAx-Online-Generator


http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3SE3902-4CB20/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE3902-4CB20

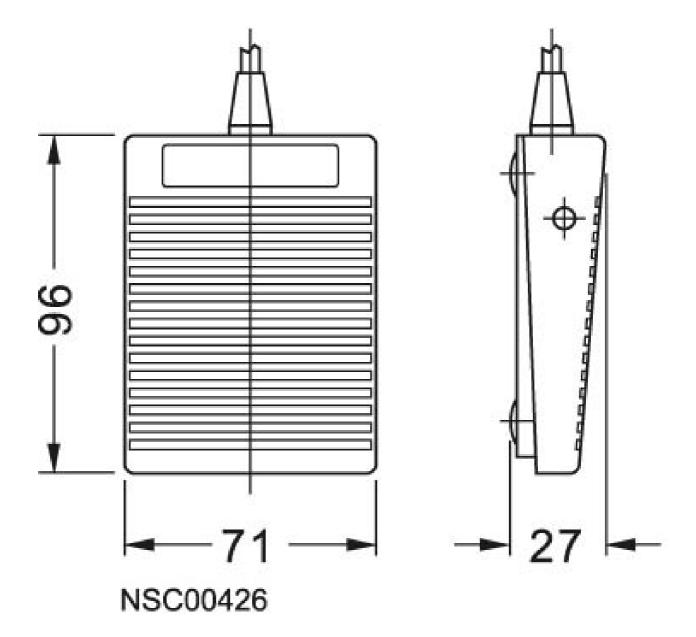

last change: Jan 21, 2013