



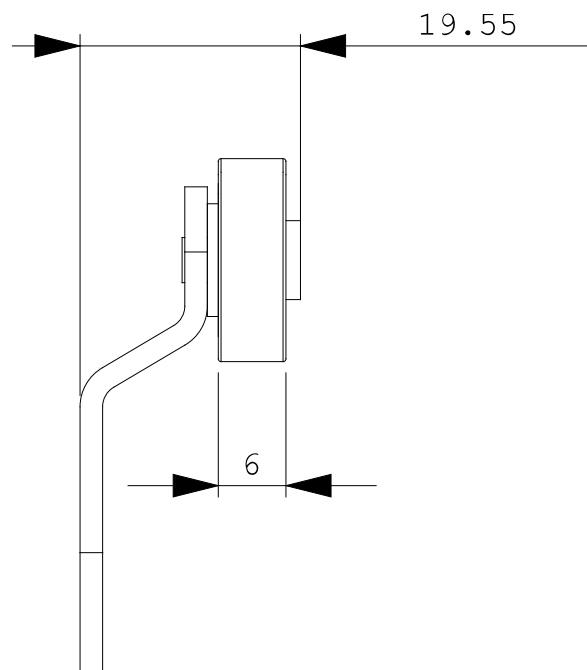
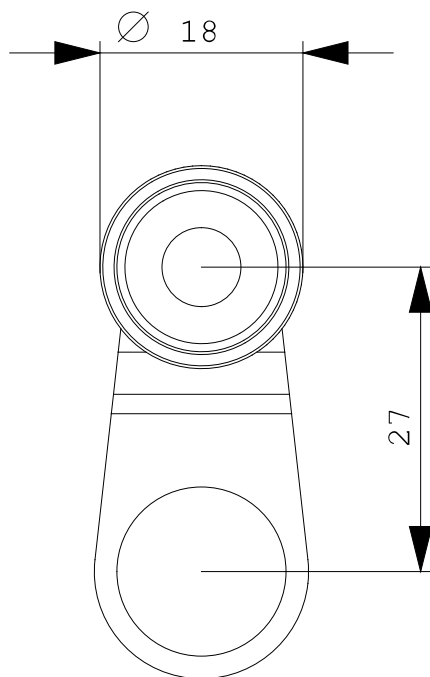
TWIST LEVER FOR POSITION SWITCH 3SE51 METAL
LEVER,
27MM LONG,STEP 9MM,
W/BALL BEARING ROLLER 19MM

General technical data:		
Product designation		actuator for part-turn actuator
Explosion protection category for dust		none
Mechanical operating cycles as operating time		
• typical		15,000,000
Resistance against vibration		0.35 mm / 5g
Resistance against shock		30g / 11 ms
Ambient temperature		
• during operating	°C	-25 ... +85
• during storage	°C	-40 ... +90
Design of the operating mechanism		metal lever, 27 mm long, step 9 mm, ball bearing roller 19 mm
mounting position		any
Reference code		
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		E
• according to DIN EN 61346-2		T

Certificates/ approvals:

General Product Approval**Test Certificates**[Special Test Certificate](#)

other

[Confirmation](#)[Vibration Test Certificates](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrial-controls/mall>**Cax online generator**<http://www.siemens.com/cax>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/3SE5000-0AA03/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5000-0AA03

last change:

Jun 16, 2014