



TWIST LEVER FOR POSITION SWITCH 3SE51 HIGH-GRADE STEEL LEVER,  
FORM A 27MM LONG, STEP 9MM,  
W. HIGH-GRADE STEEL ROLL. 19MM,  
ACC. TO EN 50041

### General technical data:

|                                                                                                                                              |          |                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------|
| <b>Product designation</b>                                                                                                                   |          | actuator for part-turn actuator                                               |
| <b>Explosion protection category for dust</b>                                                                                                |          | none                                                                          |
| <b>Mechanical operating cycles as operating time</b><br>• typical                                                                            |          | 15,000,000                                                                    |
| <b>Resistance against vibration</b>                                                                                                          |          | 0.35 mm / 5g                                                                  |
| <b>Resistance against shock</b>                                                                                                              |          | 30g / 11 ms                                                                   |
| <b>Ambient temperature</b><br>• during operating<br>• during storage                                                                         | °C<br>°C | -25 ... +85<br>-40 ... +90                                                    |
| <b>Design of the operating mechanism</b>                                                                                                     |          | stainless steel lever, 27 mm long, step 9 mm,<br>stainless steel roller 19 mm |
| <b>mounting position</b>                                                                                                                     |          | any                                                                           |
| <b>Reference code</b><br>• according to DIN 40719 extended according to IEC 204-2 /<br>according to IEC 750<br>• according to DIN EN 61346-2 |          | E<br>T                                                                        |

### Certificates/ approvals:

| General Product Approval | Declaration of Conformity | Test Certificates |
|--------------------------|---------------------------|-------------------|
|--------------------------|---------------------------|-------------------|



[Special Test Certificate](#)

other

[Confirmation](#)

[Vibration Test Certificates](#)

#### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**Cax online generator**


<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3SE5000-0AA12/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3SE5000-0AA12](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5000-0AA12)

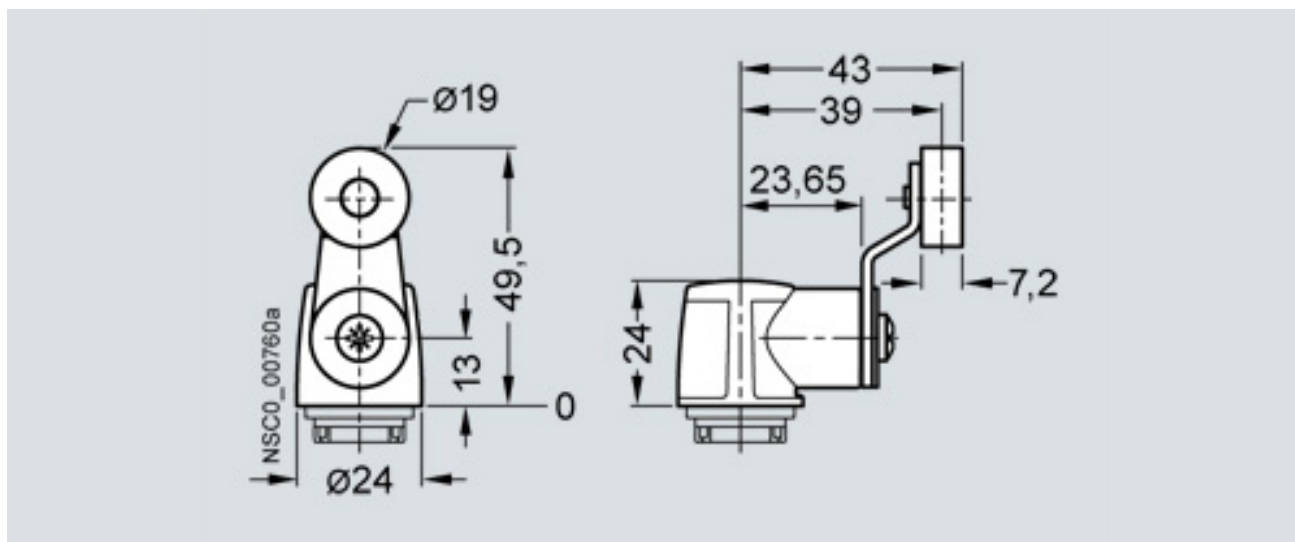

last change:

Jun 16, 2014