






LENGTH-ADJUSTABLE TWIST LEVER FOR POSITION SWITCH 3SE51/52 STAINLESS STEEL LEVER 100MM LONG,
WITH STAINLESS STEEL TERMINAL POSITIVE FIT (HOLE PITCH) PLASTIC ROLLER 19MM

General technical data:

Product designation		actuator for part-turn actuator
Explosion protection category for dust		none
Mechanical operating cycles as operating time • typical		15,000,000
Resistance against vibration		0.35 mm / 5g
Resistance against shock		30g / 11 ms
Ambient temperature • during operating • during storage	°C °C	-25 ... +85 -40 ... +90
Design of the operating mechanism		stainless steel lever, adjustable length with closing shape, plastic roller 19 mm
mounting position		any
Reference code • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2		E T

Certificates/ approvals:

General Product Approval		Declaration of Conformity	Test Certificates	
 CSA		 UL	 EG-Konf.	Special Test Certificate
other				
Confirmation		Vibration Test Certificates		
Further information:				
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs				
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall				
Cax online generator http://www.siemens.com/cax				
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3SE5000-0AA62/all				
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5000-0AA62				

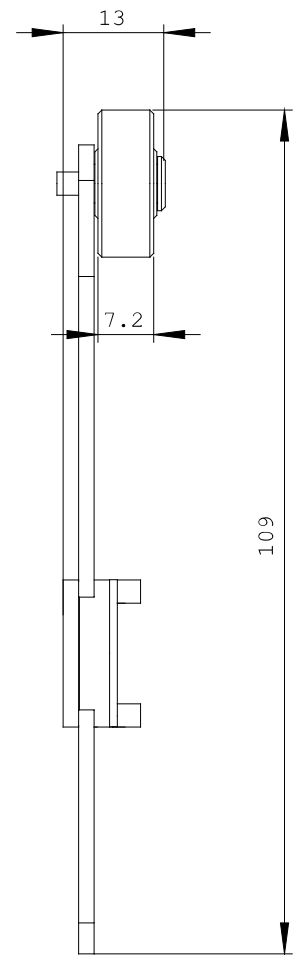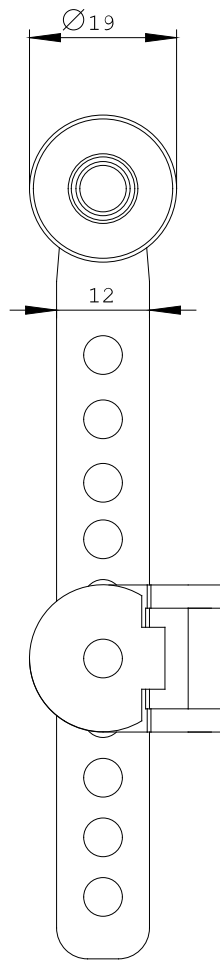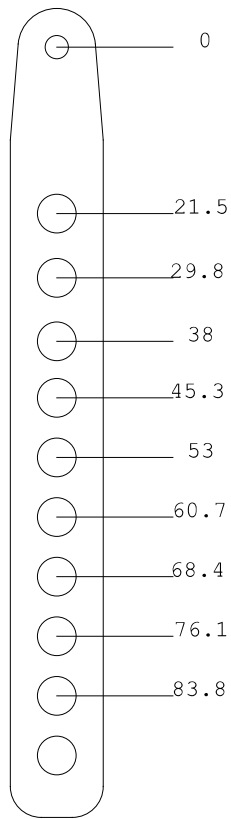

last change:

Jun 16, 2014