# **SIEMENS**

Product data sheet 3SE5000-0GA00



CONTACT BLOCK FOR POSITION SWITCH 3SE51/52 1NO/1NC SNAP-ACTION CONTACT, 2X2MM CONTACT GAP

| General technical data:                 |   |         |
|---|---|---------|
| Product designation                     |   | contact |
| Explosion protection category for dust  |   | none    |
| Insulation voltage                      |   |         |
| • rated value                           | V | 400     |
| Degree of pollution                     |   | class 3 |
| Thermal current                         | A | 6       |
| Operating current                       |   |         |
| • at AC-15                              |   |         |
| • at 24 V / rated value                 | Α | 6       |
| • at 125 V / rated value                | Α | 6       |
| • at 230 V / rated value                | Α | 3       |
| • at DC-13                              |   |         |
| • at 24 V / rated value                 | Α | 3       |
| • at 125 V / rated value                | Α | 0.55    |
| • at 230 V / rated value                | Α | 0.27    |
| Continuous current                      |   |         |
| • of the slow DIAZED fuse link          | Α | 6       |
| of the quick DIAZED fuse link           | Α | 10      |
| of the C characteristic circuit breaker | Α | 2       |

| Mechanical operating cycles as operating time   |            |  |
|---|------------|--|
| • typical   |            | 15,000,000                               |
| Electrical operating cycles as operating time   |            |  |
| <ul> <li>with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025,<br/>3RT1026 / typical</li> </ul>   |            | 10,000,000                               |
| • at AC-15 / at 230 V / typical   |            | 1,000,000                                |
| Electrical operating cycles in one hour   |            |  |
| <ul> <li>with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025,<br/>3RT1026</li> </ul>             |            | 6,000                                    |
| Repeat accuracy   | mm         | 0.1                                      |
| Design of the contact element   |            | snap-action contacts                     |
| Number of NC contacts   |            |  |
| • for auxiliary contacts  |            | 1  |
| Design of the switching function  |            | positive opening, 2x2 mm contact opening |
| Number of NO contacts   |            |  |
| • for auxiliary contacts  |            | 1  |
| Resistance against vibration  |            | 0.35 mm / 5g                             |
| Resistance against shock  |            | 30g / 11 ms                              |
| Ambient temperature   |            |  |
| during operating  | °C         | -25 +85                                  |
| during storage  | °C         | -40 +90                                  |
| Width of the sensor   | mm         | 25                                       |
| Design of the operating mechanism   |            | without                                  |
| Actuating speed   | mm/s / m/s | 0.1 2.5                                  |
| Protection class IP   |            | IP00                                     |
| mounting position   |            | any                                      |
| Design of the electrical connection   |            | screw-type terminals                     |
| Reference code  |            |  |
| <ul> <li>according to DIN 40719 extended according to IEC 204-2 /<br/>according to IEC 750</li> </ul> |            | S  |
| according to DIN EN 61346-2   |            | s  |

## Certificates/ approvals:

General Product Approval

Declaration of Conformity

Test Certificates

other

Confirmation

Certificate

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

#### Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

#### Cax online generator


http://www.siemens.com/cax

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3SE5000-0GA00/all

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

 $\underline{http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3SE5000-0GA00}$ 

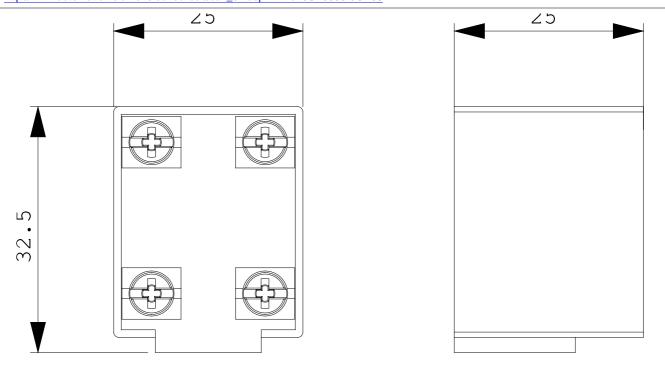

last change: Jun 16, 2014