



SIRIUS POSITION SWITCH, BASIC SWITCH,
METAL, 40MM,
ACC.TO EN50041 INCREASED CORROSION
PROTECTION,
DEVICE CONNECTION 1X (M20X1.5) 1NO/1NC QUICK-
ACT.CONTACTS FUNCTIONAL AT -40 DEGREES,
SHOCK-AND VIBRATION TEST ACC.TO EN61373,
CATEGORY 1B

Manufacturer article number		
• of the basic unit included in the scope of supply		3SE5112-0CA00-1AJ0

General technical details:		
product designation		basic switch for standard position switches
Product feature		expanded temperature range, e.g. railway application
Explosion protection category for dust		none
Insulation voltage		
• rated value	V	400
Degree of pollution		class 3
Thermal current	A	6
Operating current		
• at AC-15		
• at 24 V / rated value	A	6
• at 125 V / rated value	A	6
• at 230 V / rated value	A	6
• at 400 V / rated value	A	4
• at DC-13		
• at 24 V / rated value	A	3
• at 125 V / rated value	A	0.55
• at 230 V / rated value	A	0.27

• at 400 V / rated value	A	0.1
Continuous current		
• of the slow DIAZED fuse link	A	6
• of the quick DIAZED fuse link	A	10
• of the C characteristic circuit breaker	A	1
Mechanical operating cycles as operating time		
• typical		15,000,000
Electrical operating cycles as operating time		
• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 / typical		10,000,000
• at AC-15 / at 230 V / typical		100,000
Electrical operating cycles in one hour		
• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026		6,000
Repeat accuracy	mm	0.05
Design of the contact element		snap-action contacts
Number of NC contacts		
• for auxiliary contacts		1
Design of the switching function		Positive opening with appropriate positive opening actuator head
Number of NO contacts		
• for auxiliary contacts		1
Resistance against vibration		
• for railway applications / according to DIN EN 61373		0.35 mm / 5g Category 1, Class B
Resistance against shock		
• for railway applications / according to DIN EN 61373		30g / 11 ms Category 1, Class B
Ambient temperature		
• during operating	°C	-40 ... +85
• during storage	°C	-40 ... +90
Product specification		
• for dimensions		EN 50041
Width of the sensor	mm	40
Material		
• of the enclosure		metal
Design of the operating mechanism		without
Actuating speed	mm/s / m/s	0.1 ... 2.5
Minimum actuating force / in activation direction	N	20
Protection class IP		IP66/IP67
mounting position		any
Cable gland version		1x (M20 x 1.5)

Design of the electrical connection		screw-type terminals
Fire load	kJ	586
Item designation		
• according to DIN 40719 extendable after IEC 204-2 • according to DIN EN 61346-2		S B

Certificates/approvals:

General Product Approval	Functional Safety / Safety of Machinery	Declaration of Conformity
--------------------------	---	---------------------------



CCC



GOST



UL



VDE



VDE



EG-Konf.

Test Certificates

other

[Special Test Certificate](#)

[Confirmation](#)

[Vibration Test Certificates](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SE5112-0CA00-1AJ0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5112-0CA00-1AJ0

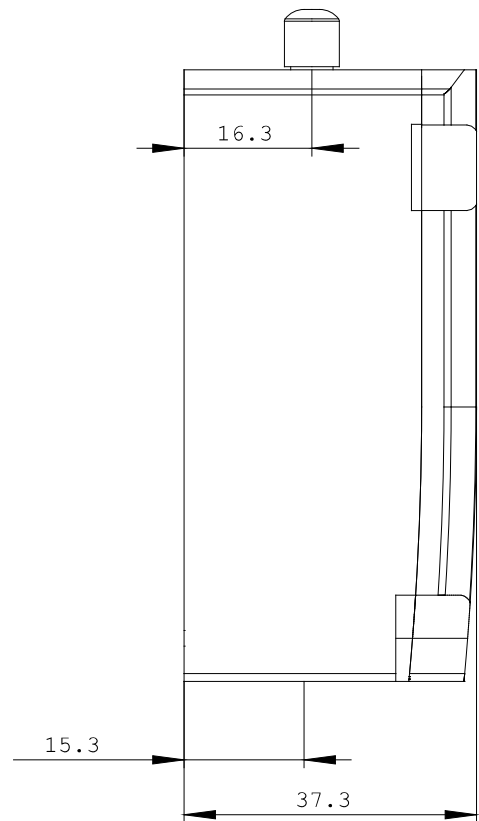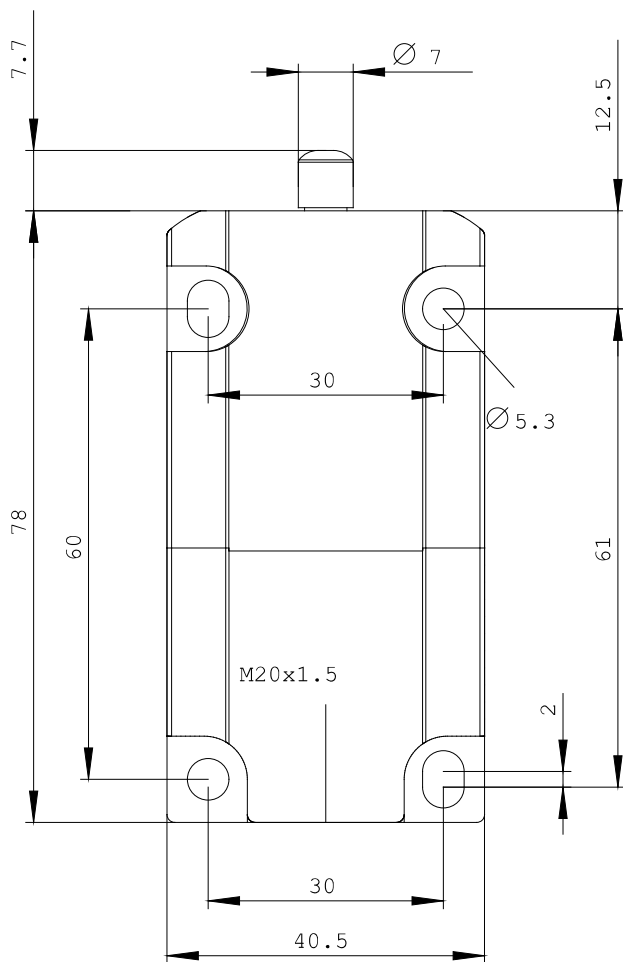

last change:

Feb 18, 2013