



SIRIUS POSITION SWITCH,
METAL WITH TWIST LEVER 40MM,
ACC. TO EN50041 INCREASED ANTI-CORROSION
PROTECTION,
DEVICE CONNECTION 1X (M20X1.5) 1NO/2NC QUICK
ACTION CONTACTS FUNCTIONAL AT -40 DEGREES,
SHOCK AND VIBRATION TEST ACC. TO EN 61373,
CATEGORY 1B

Manufacturer article number		
• of the basic unit included in the scope of supply		3SE5112-0LA00-1AJ0
• of the actuator head for position switches included in the scope of supply		3SE5000-0AH00-1AJ0
• of the operating lever included in the scope of supply		3SE5000-0AA11-1AJ0

General technical data:

Product designation		standard position switch
Product feature		expanded temperature range, e.g. railway application
Explosion protection category for dust		none
Insulation voltage		
• rated value	V	400
Degree of pollution		class 3
Thermal current	A	6
Operating current		
• at AC-15		
• at 24 V / rated value	A	6
• at 125 V / rated value	A	6
• at 230 V / rated value	A	1.5
• at 400 V / rated value	A	4
• at DC-13		
• at 24 V / rated value	A	3

• at 125 V / rated value	A	0.55
• at 230 V / rated value	A	0.27
Continuous current		
• of the slow DIAZED fuse link	A	6
• of the quick DIAZED fuse link	A	10
• of the C characteristic circuit breaker	A	1
Mechanical operating cycles as operating time		
• typical		15,000,000
Electrical operating cycles as operating time		
• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 / typical		10,000,000
• at AC-15 / at 230 V / typical		100,000
Electrical operating cycles in one hour		
• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026		6,000
Repeat accuracy	mm	0.05
Design of the contact element		snap-action contacts
Number of NC contacts		
• for auxiliary contacts		2
Design of the switching function		positive opening
Number of NO contacts		
• for auxiliary contacts		1
Resistance against vibration		
• for railway applications / according to DIN EN 61373		0.35 mm / 5g Category 1, Class B
Resistance against shock		
• for railway applications / according to DIN EN 61373		30g / 11 ms Category 1, Class B
Ambient temperature		
• during operating	°C	-40 ... +85
• during storage	°C	-40 ... +90
Product specification		
• for dimensions		EN 50041
Width of the sensor	mm	40
Material		
• of the enclosure		metal
Material / of the enclosure / of the switch head		metal
Design of the operating mechanism		stainless steel lever, 27 mm long, step 9 mm, plastic roller 19 mm
Actuating speed	mm/s / m/s	0.1 ... 1.5
Minimum actuating force / in activation direction	N·m	0.25
Protection class IP		IP66/IP67

mounting position		any
Cable gland version		1x (M20 x 1.5)
Design of the electrical connection		screw-type terminals
Fire load	kJ	700
Reference code		
• according to DIN 40719 extended according to IEC 204-2 • according to DIN EN 61346-2		S B

Certificates/ approvals:

General Product Approval				Declaration of Conformity	Test Certificates
					Special Test Certificate
CCC	CSA		UL	EG-Konf.	
other					
Confirmation					

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator




<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SE5112-0LH11-1AJ0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5112-0LH11-1AJ0

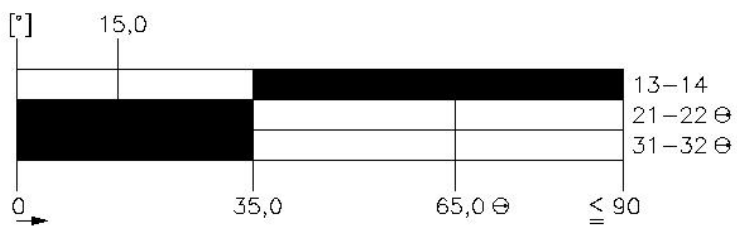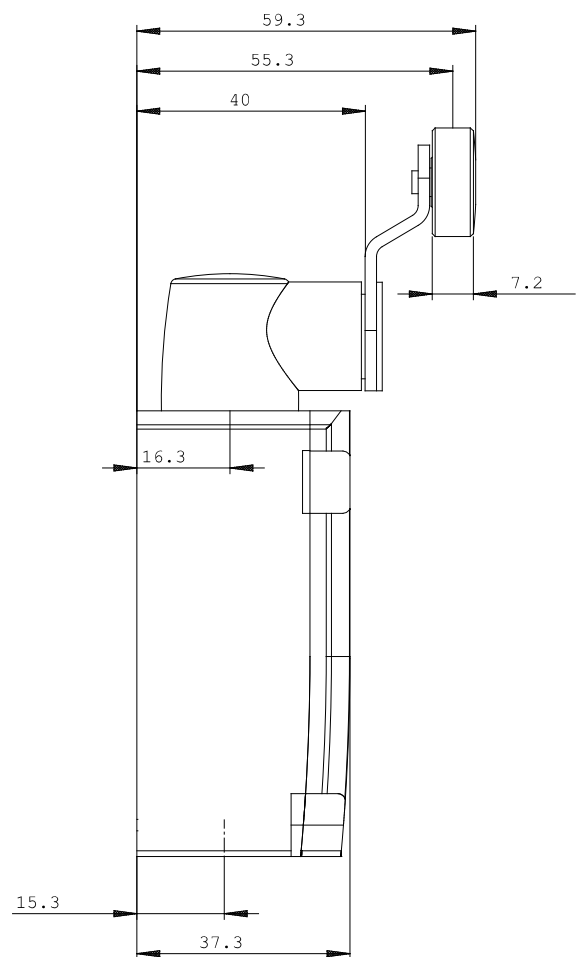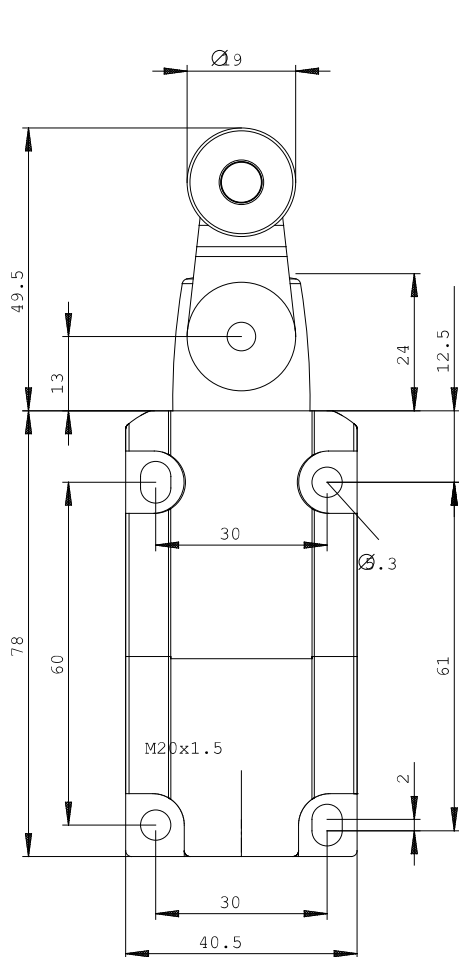

last change:

Jul 24, 2014