



ENCLOSURE W. INCREASED CORROSION PROTECTION FOR POSITION SWITCH 3SE51. 56MM WIDE, METAL W. COVER, TURQUOISE DEVICE CONNECTION 3X(M20X1.5)

General technical data:

Product designation		enclosure with increased corrosion protection for standard position switch, metal, 54 mm wide, cover turquoise
Product feature		increased corrosion protection
Explosion protection category for dust		none
Insulation voltage • rated value	V	400
Degree of pollution		class 3
Resistance against vibration		0.35 mm / 5g
Resistance against shock		30g / 11 ms
Ambient temperature • during operating • during storage	°C	-25 ... +85 -40 ... +90
Width of the sensor	mm	56
Material • of the enclosure		metal
Design of the operating mechanism		without
Protection class IP		IP66/IP67
mounting position		any
Cable gland version		3 x (M20 x 1.5)

Reference code

- according to DIN 40719 extended according to IEC 204-2
- according to DIN EN 61346-2

E
U

Certificates/ approvals:

General Product Approval



CCC



CSA



UL



EG-Konf.

Test Certificates

[Special Test Certificate](#)

other

[Confirmation](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SE5122-0AA00-1CA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5122-0AA00-1CA0

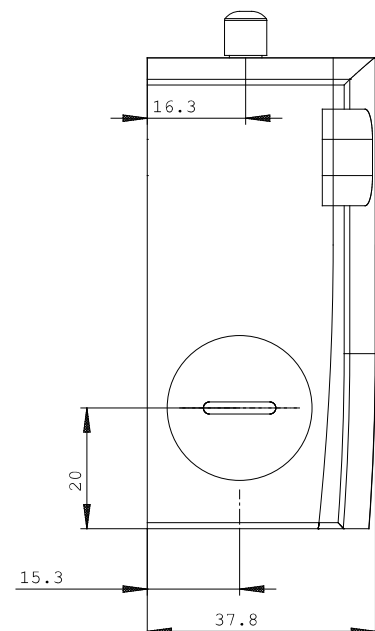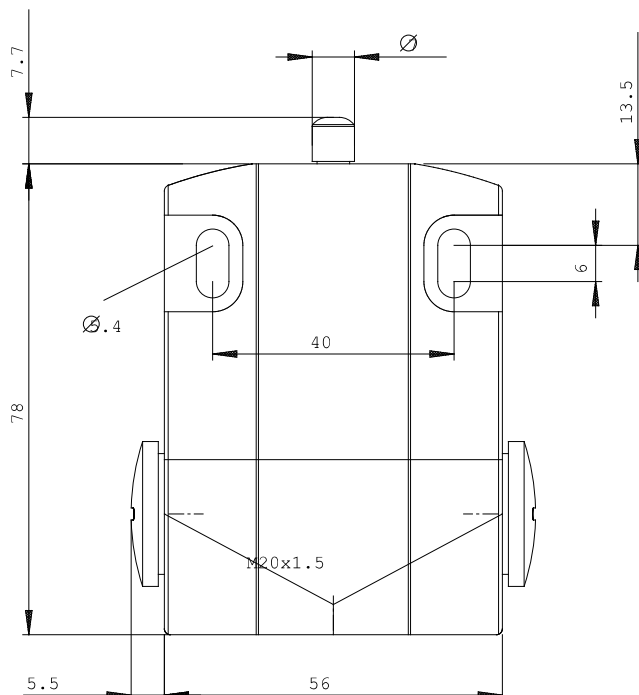

last change:

Jul 24, 2014