



SAFETY POS. SWITCH W. SEPARATE ACTUATOR,  
 PLASTIC ENCLOSURE, 31MM;  
 1X(M20X1,5) SLOW-ACTION CONTACTS 1NO+1NC,  
 2 LEDS YELLOW/GREEN 230 V AC,  
 5 DIRECTIONS OF APPROACH,  
 THE MATCHING SEPARATE ACTUATOR 3SE5000-0AV0.  
 IS TO BE ORDERED SEPARATELY

**General technical details:**

<b>product designation</b>		position switch with separate actuator
<b>Explosion protection category for dust</b>		none
<b>Type of voltage / of the supply voltage</b> • of the optional LED display		AC
<b>Insulation voltage</b> • rated value	V	400
<b>Degree of pollution</b>		class 3
<b>Thermal current</b>	A	6
<b>Operating current</b> • at AC-15 • at 24 V / rated value • at 125 V / rated value • at 230 V / rated value • at DC-13 • at 24 V / rated value • at 125 V / rated value • at 230 V / rated value	A A A A A A A	6 6 3 3 0.55 0.27
<b>Continuous current</b> • of the slow DIAZED fuse link	A	6

<ul style="list-style-type: none"> <li>• of the quick DIAZED fuse link</li> </ul>	A	10
<ul style="list-style-type: none"> <li>• of the C characteristic circuit breaker</li> </ul>	A	2
<b>Mechanical operating cycles as operating time</b>		
<ul style="list-style-type: none"> <li>• typical</li> </ul>		1,000,000
<b>Electrical operating cycles as operating time</b>		
<ul style="list-style-type: none"> <li>• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 / typical</li> </ul>		10,000,000
<ul style="list-style-type: none"> <li>• at AC-15 / at 230 V / typical</li> </ul>		100,000
<b>Electrical operating cycles in one hour</b>		
<ul style="list-style-type: none"> <li>• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026</li> </ul>		6,000
<b>Repeat accuracy</b>	mm	0.05
<b>Design of the contact element</b>		slow-action contacts
<b>Number of NC contacts</b>		
<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>		1
<b>Design of the switching function</b>		positive opening
<b>Number of NO contacts</b>		
<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>		1
<b>Resistance against vibration</b>		0.35 mm / 5g
<b>Resistance against shock</b>		30g / 11 ms
<b>Ambient temperature</b>		
<ul style="list-style-type: none"> <li>• during operating</li> </ul>	°C	-25 ... +60
<ul style="list-style-type: none"> <li>• during storage</li> </ul>	°C	-40 ... +90
<b>Product specification</b>		
<ul style="list-style-type: none"> <li>• for dimensions</li> </ul>		EN 50047
<b>Width of the sensor</b>	mm	31
<b>Material</b>		
<ul style="list-style-type: none"> <li>• of the enclosure</li> </ul>		plastic
<b>Material / of the housing / of the switch head</b>		plastic
<b>Design of the operating mechanism</b>		5 directions of approach
<b>Actuating speed</b>	mm/s / m/s	0.4 ... 0.5
<b>Minimum actuating force / in activation direction</b>	N	20
<b>Protection class IP</b>		IP65
<b>mounting position</b>		any
<b>Cable gland version</b>		1x (M20 x 1.5)
<b>Design of the electrical connection</b>		screw-type terminals
<b>Manufacturer article number</b>		

- of the optional actuators

3SE5000-0AV01 standard actuator, 3SE5000-0AV02 actuator with vertical mounting, 3SE5000-0AV03 actuator with horizontal mounting, 3SE5000-0AV04 radius actuator left, 3SE5000-0AV05 universal actuator, 3SE5000-0AV06 radius actuator right, 3SE5000-0AV07 heavy-duty actuator, 3SE5000-0AW11 plastic actuator, 3SE5000-0AW21 stainless steel actuator

**Item designation**

- according to DIN 40719 extendable after IEC 204-2
- according to DIN EN 61346-2

S  
B

**Certificates/approvals:**

**General Product Approval**

**Functional Safety /  
Safety of  
Machinery**

**Declaration of  
Conformity**



**Test Certificates**

**other**

[Special Test Certificate](#)

[Confirmation](#)

**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**Cax online generator:**


<http://www.siemens.com/cax>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3SE5232-3RV40/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3SE5232-3RV40](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5232-3RV40)

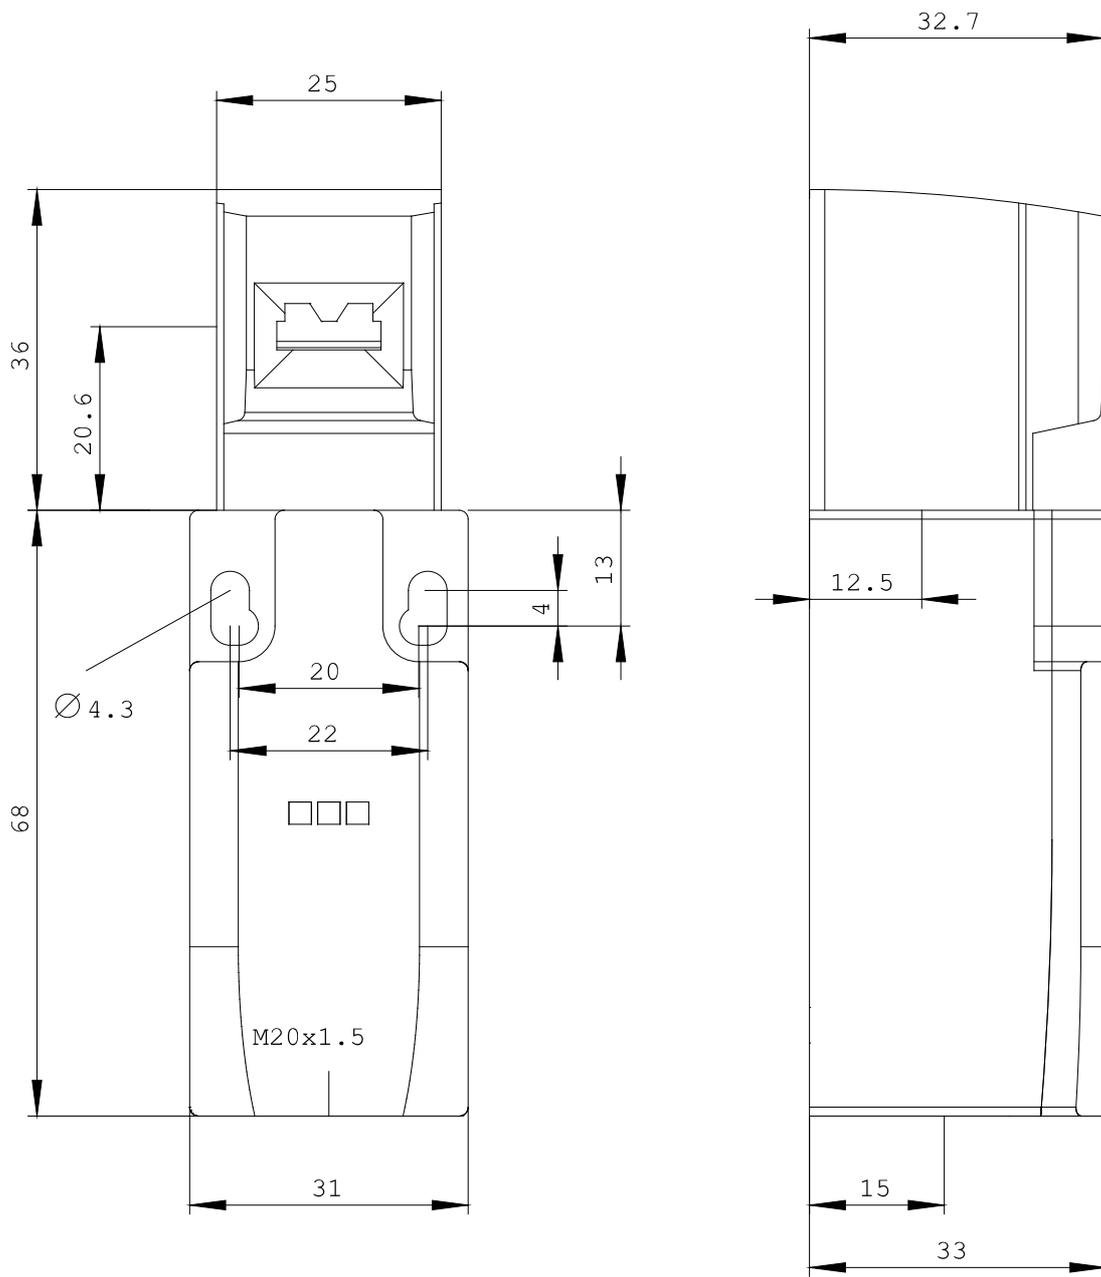

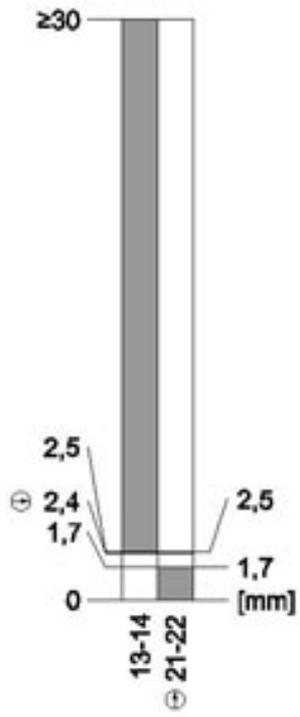

last change:

Feb 18, 2013