

SIRIUS POSITION SWITCH W. INCREASED CORROSION PROT.
PLASTIC HOUSING WIDE ACC. TO EN50047, 50MM DEVICE
CONNECTION 2X (M20X1.5); 1NO/2NC SLOW-ACTION
CONTACTS TEFLON PLUNGER



Product designation	standard position switch
Manufacturer's article number	
• of the supplied basic switch • of the supplied switching contacts • of the supplied empty enclosure with cover	3SE5242-0KC05-1CA0 3SE5000-0KA00 3SE5242-0AC05-1CA0
General technical data	
Product function	
• positive opening	Yes
Insulation voltage	
• rated value	400 V
Degree of pollution	class 3
Surge voltage resistance rated value	6 kV
Protection class IP	IP66/IP67
Shock resistance	
• acc. to IEC 60068-2-27	30 g / 11 ms
Vibration resistance	
• acc. to IEC 60068-2-6	0.35 mm/5g
Mechanical service life (switching cycles)	
• typical	15 000 000

Electrical endurance (switching cycles)	
• at AC-15 at 230 V typical	100 000
Electrical endurance (switching cycles) with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 typical	10 000 000
Electrical operating cycles in one hour with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026	6 000
Thermal current	6 A
Equipment marking	
• acc. to DIN EN 61346-2	B
• acc. to DIN EN 81346-2	B
Continuous current of the C characteristic MCB	1 A; for a short-circuit current smaller than 400 A
Continuous current of the quick DIAZED fuse link	10 A; for a short-circuit current smaller than 400 A
Continuous current of the DIAZED fuse link gG	6 A
Active principle	mechanical
Repeat accuracy	0.05 mm
Minimum actuating force in activation direction	20 N
Operating current at AC-15	
• at 24 V rated value	6 A
• at 125 V rated value	6 A
• at 230 V rated value	1.5 A
Operating current at DC-13	
• at 24 V rated value	3 A
• at 125 V rated value	0.55 A
• at 230 V rated value	0.27 A

Enclosure

Design of the housing	block, wide
Material of the enclosure	plastic
Coating of the enclosure	Other types
Design of the housing acc. to standard	No

Drive Head

Design of the operating mechanism	Rounded plunger, Teflon plunger
Standard-compliant actuator head	EN 50047, design B
Shape of the switch head	rounded
Design of the switching function	positive opening

Connections/Terminals



Type of electrical connection	screw-type terminals
--------------------------------------	----------------------

Mechanical data

Cable entry type	2 x (M20 x 1.5)
-------------------------	-----------------

Communication/ Protocol

Design of the interface	without		
Ambient conditions			
Ambient temperature			
• during operation	-25 ... +85 °C		
• during storage	-40 ... +90 °C		
Installation/ mounting/ dimensions			
Mounting position	any		
Mounting type	screw fixing		
Certificates/approvals			
General Product Approval		Functional Safety/Safety of Machinery	Declaration of Conformity
			
CCC	CSA	UL	Baumusterprüfbescheinigung
			
		EG-Konf.	
Test Certificates	other		
spezielle Prüfbescheinigungen	Bestätigungen		
n			
Further information			
Information- and Downloadcenter (Catalogs, Brochures,...)			
http://www.siemens.com/industrial-controls/catalogs			
Industry Mall (Online ordering system)			
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE5242-0KC05-1CA0			
Cax online generator			
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE5242-0KC05-1CA0			
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)			
https://support.industry.siemens.com/cs/ww/en/ps/3SE5242-0KC05-1CA0			
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)			
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE5242-0KC05-1CA0&lang=en			

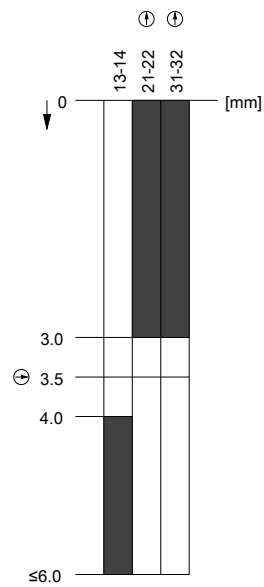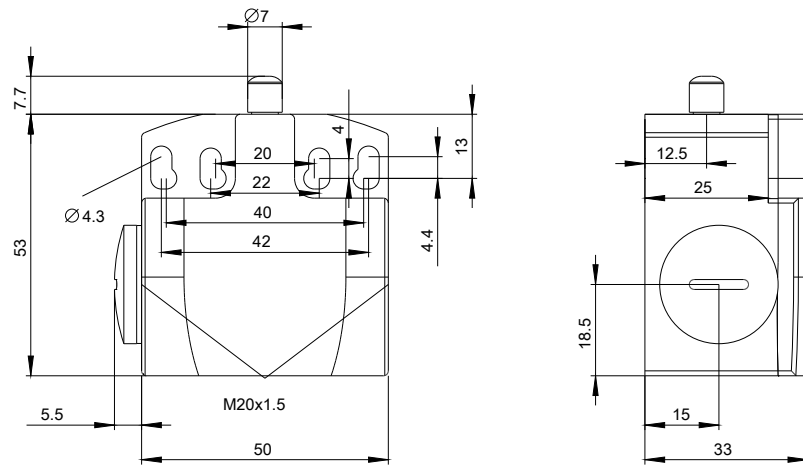

last modified:

10/07/2016