



SAFETY POSITION SWITCHES WITH SOLENOID INTERLOCKING LOCK. FORCE 2600N;5 APPR. DIR. METAL HOUSING,3X(M20X1.5) SPRING-LOCKED, EMERGENCY RELEASE ON REAR A. AUXILIARY RELEASE ON FRONT, MAGNET VOLTAGE 230V AC, MONITOR. OF ACTUATOR 2NC/1NO, MONITOR. OF MAGNET 2NC/1NO LEDS YELLOW/GREEN

General technical details:		
<b>Explosion protection category for dust</b>		none
<b>Supply voltage</b>		
• of the magnet coil	V	230
<b>Type of voltage / of the supply voltage</b>		
• of the optional LED display		AC
<b>Relative ON period</b>		
• of the magnet coil	%	100
<b>Recorded real power</b>		
• of the magnet coil	W	3.5
<b>Insulation voltage</b>		
• rated value	V	250
<b>Degree of pollution</b>		class 3
<b>Thermal current</b>	A	6
<b>Operating current</b>		
• at AC-15		
• at 24 V / rated value	A	6
• at 125 V / rated value	A	3
• at 230 V / rated value	A	1.5
• at DC-13		

<ul style="list-style-type: none"> <li>• at 24 V / rated value</li> </ul>	A	3
<ul style="list-style-type: none"> <li>• at 125 V / rated value</li> </ul>	A	0.55
<ul style="list-style-type: none"> <li>• at 230 V / rated value</li> </ul>	A	0.27
<b>Continuous current</b>		
<ul style="list-style-type: none"> <li>• of the slow DIAZED fuse link</li> </ul>	A	6
<ul style="list-style-type: none"> <li>• of the quick DIAZED fuse link</li> </ul>	A	10
<ul style="list-style-type: none"> <li>• of the C characteristic circuit breaker</li> </ul>	A	0.5
<b>Mechanical operating cycles as operating time / typical</b>		1,000,000
<b>Electrical operating cycles as operating time</b>		
<ul style="list-style-type: none"> <li>• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 / typical</li> </ul>		1,000,000
<b>Electrical operating cycles in one hour</b>		
<ul style="list-style-type: none"> <li>• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026</li> </ul>		6,000
<b>Repeat accuracy</b>	mm	0.05
<b>Design of the contact element</b>		slow-action contacts
<b>Number of NC contacts</b>		
<ul style="list-style-type: none"> <li>• for the position surveillance of the locking element</li> </ul>		2
<b>Number of NC contacts</b>		
<ul style="list-style-type: none"> <li>• for the position surveillance of the activation element</li> </ul>		2
<b>Number of NO contacts</b>		
<ul style="list-style-type: none"> <li>• for the position surveillance of the locking element</li> </ul>		1
<b>Number of NO contacts</b>		
<ul style="list-style-type: none"> <li>• for the position surveillance of the activation element</li> </ul>		1
<b>Design of the switching function</b>		positive opening
<b>Resistance against vibration</b>		0.35 mm / 5g
<b>Resistance against shock</b>		30g / 11 ms
<b>Ambient temperature</b>		
<ul style="list-style-type: none"> <li>• during operating</li> </ul>	°C	-25 ... +60
<ul style="list-style-type: none"> <li>• during storage</li> </ul>	°C	-40 ... +80
<b>Width of the sensor</b>	mm	54
<b>Material</b>		
<ul style="list-style-type: none"> <li>• of the enclosure</li> </ul>		metal
<b>Material / of the housing / of the switch head</b>		metal
<b>Design of the operating mechanism</b>		5 directions of approach
<b>Actuating speed</b>	m/s	0.4 ... 1.5
<b>Minimum actuating force</b>	N	30
<b>Protection class IP</b>		IP65/IP67
<b>mounting position</b>		any
<b>Cable gland version</b>		3 x (M20 x 1.5)

<b>Design of the electrical connection</b>		screw-type terminals
<b>Item designation</b>		
<ul style="list-style-type: none"> <li>• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> <li>• according to DIN EN 61346-2</li> </ul>		S
		B

**Certificates/approvals:**

<b>General Product Approval</b>	<b>Functional Safety / Safety of Machinery</b>
---------------------------------	--



<b>Declaration of Conformity</b>	<b>Test Certificates</b>	<b>other</b>
----------------------------------	--------------------------	--------------






[Special Test Certificate](#)

[Confirmation](#)

**Further information:**

- Information- and Downloadcenter (Catalogs, Brochures,...)**  
<http://www.siemens.com/industrial-controls/catalogs>
- 
- Industry Mall (Online ordering system)**  
<http://www.siemens.com/industrial-controls/mall>
- 
- Cax online generator:**  
<http://www.siemens.com/cax>
- 
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**  
<http://support.automation.siemens.com/WW/view/en/3SE5312-3SJ13/all>
- 
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**  
[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3SE5312-3SJ13](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5312-3SJ13)

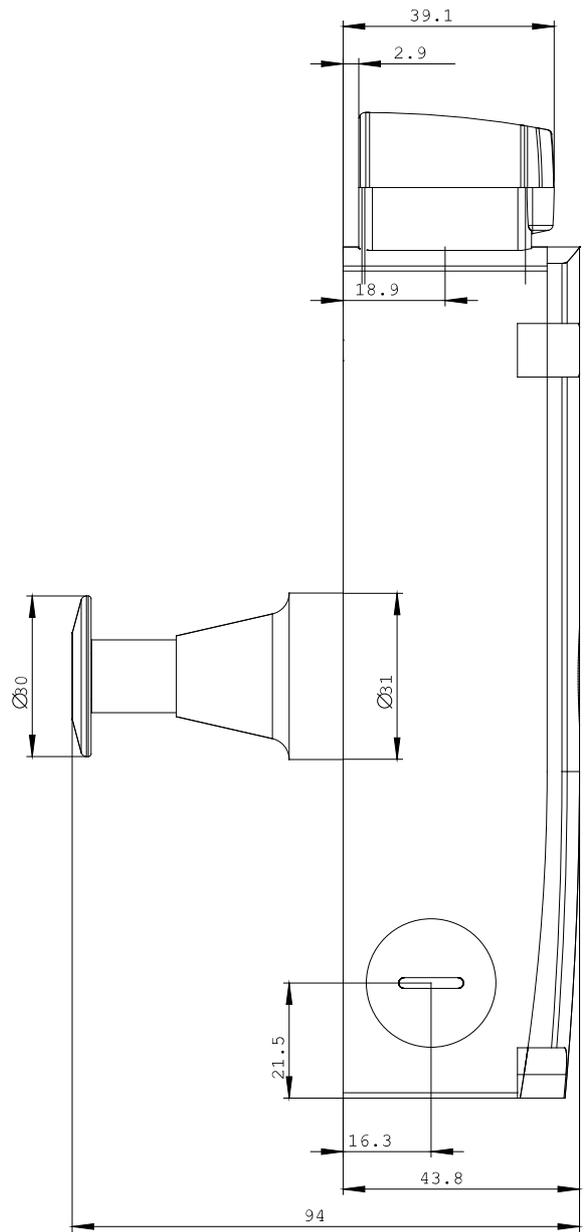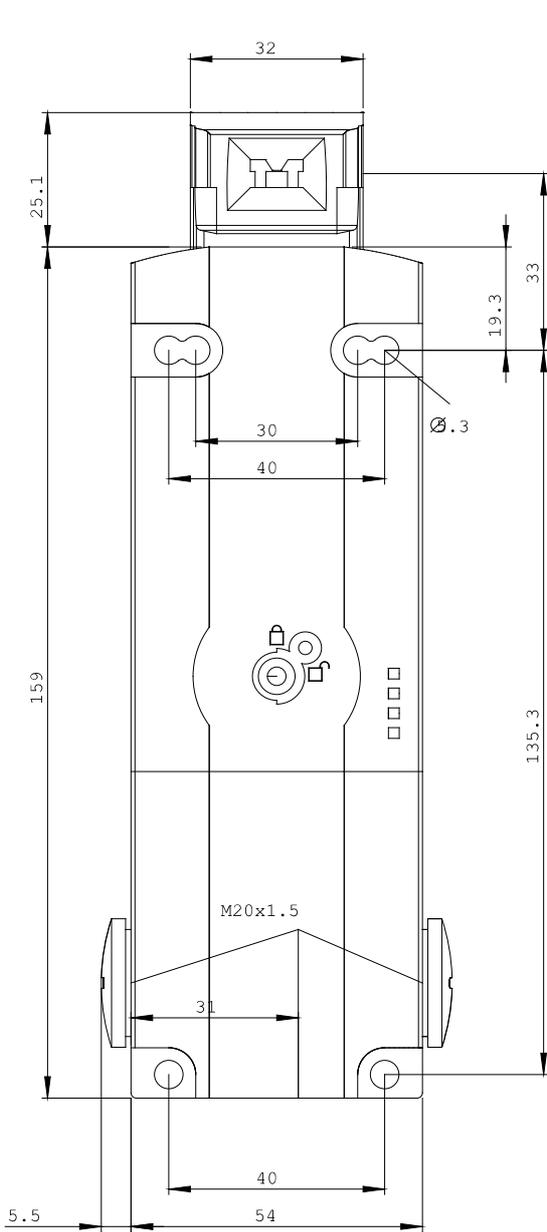

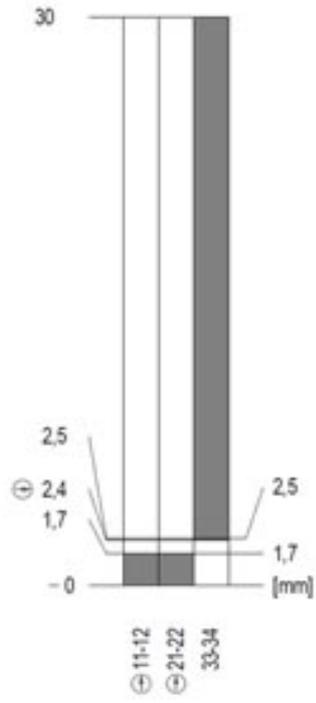

last change:

Jan 21, 2013