# **SIEMENS**

Product data sheet 3SE6315-1BB01



RFID NON-CONTACT SAFETY SWITCH RECTANGULAR 25MM X 91MM,

FAMILY-CODED WITH M12 CONNECTOR 8-POLE AND MAGNETIC LATCHING DELIVERY STATE: READY FOR OPERATION,

ACTUATOR WITH MAGNETIC LATCHING 18 N, ORDER SEPARATELY 3SE6310-1BC01

| General technical data:                                    |    |                                   |
|--|----|-----------------------------------|
| Product designation  |    | RFID safety switch                |
| Product feature  |    | Family coded with magnet latching |
| Design of the product                                      |    | RFID safety cut-out switch        |
| Design of the operating mechanism                          |    | RFID                              |
| Product function / cross circuit/short circuit recognition |    | Yes                               |
| Product function / positive opening                        |    | No                                |
| Output current / minimum                                   | Α  | 0.5                               |
| Output current / at the safety-related output / maximum    | Α  | 0.25                              |
| Type of voltage  |    | DC                                |
| Supply voltage   | V  | 20.4 26.4                         |
| Voltage type / of operating voltage                        |    | DC                                |
| Operating voltage / rated value                            | V  | 24                                |
| Operating current / rated value                            | Α  | 0.6                               |
| Shock resistance / according to IEC 60068-2-27             |    | Sinusoidal half-wave 30g / 11 ms  |
| Resistance against vibration / according to IEC 60068-2-6  |    | 10 55 Hz: 1 mm                    |
| Suitability for use / safety-related circuits              |    | Yes                               |
| Design of the interface / for safety-related communication |    | connector M12                     |
| Operating distance   | mm | 12                                |
| Switching frequency  | Hz | 1                                 |

| Secure switching distance OFF:           | mm | 16  |
|--|----|-----|
| Secure switching distance ON             | mm | 10  |
| Design of the evaluation unit / required |    | yes |

| Enclosure:                                   |    |                             |
|--|----|-----------------------------|
| Mounting type                                |    | screw fixing                |
| Material                                     |    |                             |
| • of the enclosure                           |    | plastic                     |
| of the cable sheath                          |    | PVC                         |
| of the active sensor area                    |    | plastic                     |
| Height of the sensor                         | mm | 22                          |
| Length of the sensor                         | mm | 106                         |
| Width of the sensor                          | mm | 25                          |
| Mechanical installation condition for sensor |    | flush installation possible |

| Contact:   |                    |
|--|--------------------|
| Design of the switching function                                       | positive switching |
| Number of switching contacts / for reporting function / safety-related | 1                  |
| Design of the electrical connection                                    | connector M12      |

| Ambient conditions: |    |         |
|---------------------|----|---------|
| ambient temperature |    |         |
| during operating    | °C | -25 +70 |

| Certificates/ approvals:                              |                   |  |
|---|-------------------|--|
| Protection class IP                                   | IP65, IP67, IP69k |  |
| Verification of suitability                           | cURus             |  |
| Safety Integrity Level (SIL) / according to IEC 61508 | SIL3              |  |
| Performance level (PL) / according to EN ISO 13849-1  | е                 |  |
| Category / according to EN 954-1                      | 4                 |  |
|   |                   |  |

| General Product Approval | Functional Safety / | Declaration of | other |
|--------------------------|---------------------|----------------|-------|
|                          | Safety of           | Conformity     |       |
|                          | Machinery           |                |       |









Declaration of Conformity

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrymall

#### Cax online generator


http://www.siemens.com/cax


### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3SE6315-1BB01/all

## Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3SE6315-1BB01

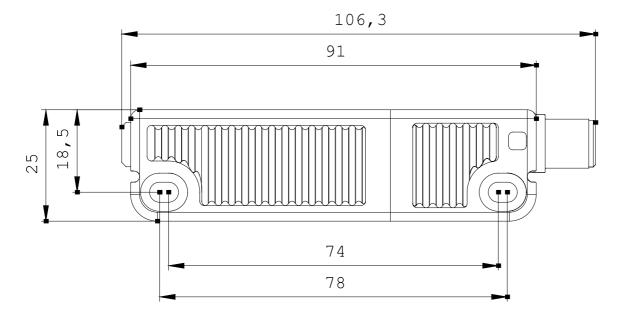

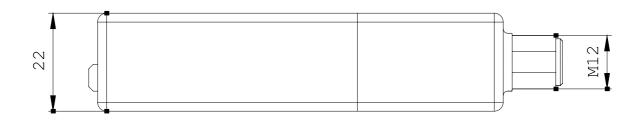

last change: Jul 28, 2014