



General technical details:

Product feature		with integrated ASIsafe electronics
Type of voltage / of the supply voltage • of the optional LED display		DC
Insulation voltage • rated value	V	30
Degree of pollution		class 3
Mechanical operating cycles as operating time • typical		1,000,000
Repeat accuracy	mm	0.1
Design of the contact element		slow-action contacts
Number of NC contacts • for auxiliary contacts		2
Design of the switching function		positive opening
Number of NO contacts • for auxiliary contacts		0
Resistance against vibration		0.35 mm / 5g
Resistance against shock		30g / 11 ms
Ambient temperature • during operating	°C	-25 ... +60

• during storage	°C	-40 ... +80
Product specification		
• for dimensions		EN 50041
Width of the sensor	mm	40
Material		
• of the enclosure		metal
Material / of the housing / of the switch head		metal enclosure
Design of the operating mechanism		5 directions of approach
Actuating speed	mm/s / m/s	0.4 ... 0.5
Minimum actuating force	N	10
Protection class IP		IP66/IP67
mounting position		any
Design of the electrical connection		plug M12
Design of the plug-in connection		M12 plug, 4-pole: Pin 1 = ASI+ , Pin 2 = not assigned, Pin 3= ASI-, Pin 4 = not assigned
Manufacturer article number		
• of the optional actuators		3SE5000-0AV01 standard actuator, 3SE5000-0AV02 actuator with vertical fixing, 3SE5000-0AV03 actuator with transverse fixing, 3SE5000-0AV04 radius actuator left, 3SE5000-0AV05 universal actuator, 3SE5000-0AV06 radius actuator right
Item designation		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		S
• according to DIN EN 61346-2		B

Certificates/approvals:

General Product Approval



CCC



CSA



GOST



TUV



UL



VDE

Functional Safety /
Safety of
Machinery

Declaration of
Conformity

other



VDE



EG-Konf.

[other](#)


Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

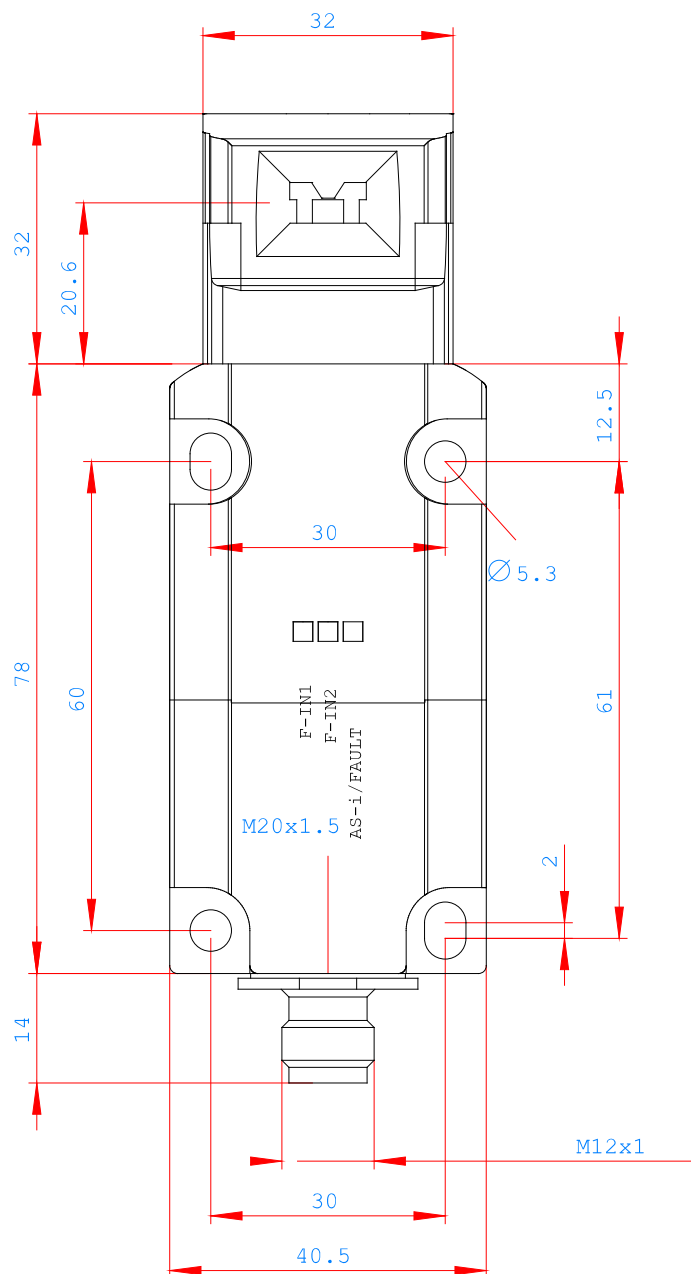

last change:

Jan 21, 2013