



SAFETY POSITION SWITCHES WITH SOLENOID INTERLOCKING
 LOCKING FORCE 1500N, 5 DIRECTIONS OF APPROACH
 PLASTIC ENCLOSURE, M12 CONNECT. ASISAFE INTEGRATED
 CH1=ACTUATOR 1NC, CH2=MAGNET 1NC SPRING-ACTUATED
 LOCK, AUXIL. RELEASE ON FRONT MAGNET VOLTAGE 24 V
 DC/AC, MONITORING ACTUATOR 2NC/1NO, MONITORING
 MAGNET 2NC/1NO, THE MATCHING SEPARATE ACTUATOR
 3SE5000-0AV0. IS TO BE ORDERED SEPARATELY

Product designation	position switch with tumbler
Design of the product	with separate actuator and with tumbler
Manufacturer's article number	
of the optional actuators	3SE5000-0AV01 standard actuator, 3SE5000-0AV02 actuator with vertical mounting, 3SE5000-0AV03 actuator with transverse mounting, 3SE5000-0AV04 radius actuator left, 3SE5000-0AV05 universal actuator, 3SE5000-0AV06 radius actuator right, 3SE5000-0AV07 heavy duty actuator

General technical data	
Product function	
positive opening	Yes
Insulation voltage	
rated value	30 V
Degree of pollution	class 3
Surge voltage resistance rated value	0.8 kV
Protection class IP	IP66/IP67
Vibration resistance	0.35 mm / 5g
acc. to IEC 60068-2-6	0.35 mm/5g
Mechanical service life (switching cycles)	

• typical	1 000 000
Material of the enclosure of the switch head	plastic
Equipment marking	
• acc. to DIN EN 61346-2	B
• acc. to DIN EN 81346-2	B
Locking force	1 300 N
• acc. to DIN EN ISO 14119	1 000 N
Repeat accuracy	0.1 mm
Minimum actuating force in activation direction	30 N

Enclosure

Design of the housing	special design
Material of the enclosure	plastic
Design of the housing acc. to standard	No

Drive Head

Design of the operating mechanism	5 directions of approach
Design of the switching function	positive opening
Number of actuation directions	5

Connections/Terminals

Type of electrical connection	M12 plug, fixed
--------------------------------------	-----------------

Mechanical data

Design of plug-in connection	M12 plug, 4-pole: Pin 1 = ASI+ , Pin 2 = not assigned, Pin 3= ASI- , Pin 4 = not assigned
Locking mechanism design	spring-actuated lock (closed-circuit principle) with auxiliary release

Communication/ Protocol

Design of the interface	M12 plug, fixed
--------------------------------	-----------------

Ambient conditions

Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C



Supply voltage

Supply voltage of magnet coil	24 V
--------------------------------------	------

Installation/ mounting/ dimensions

Mounting position	any
Mounting type	screw fixing

Certificates/approvals

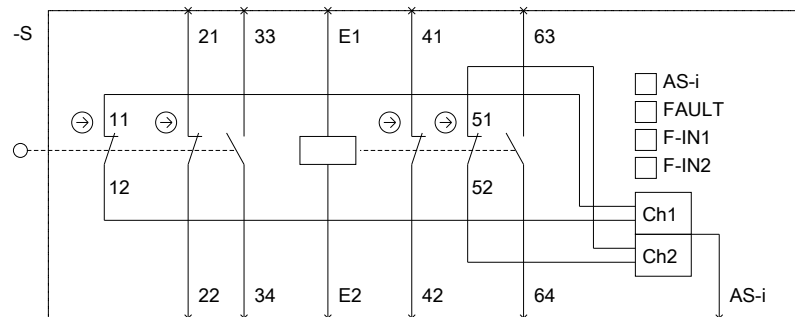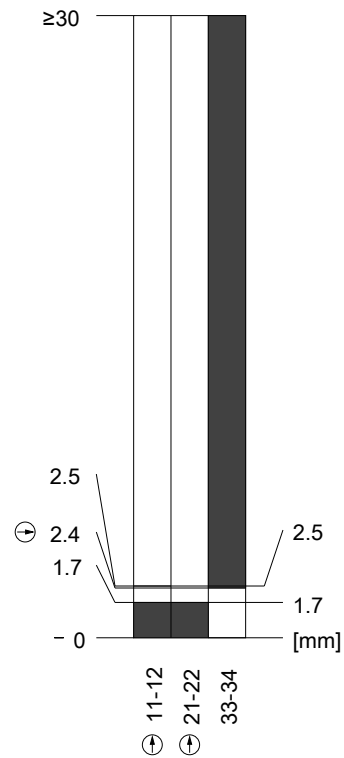

last modified:

10/07/2016