

AS-INTERFACE F-ADAPTER FOR EMERG. STOP MUSHROOM
PUSHBUTTON,FRONT PLATE MOUNTING, 2 INPUTS, 1 OUTPUT
FOR LED CONTROL, INSULATION PIERCING METHOD

Product designation	AS-Interface F-adapter for EMERGENCY-OFF control device SIRIUS 3SB3
----------------------------	--

General technical data

Protection class IP	IP20
Equipment marking	
• acc. to DIN EN 61346-2	S
• acc. to DIN EN 81346-2	S

Connections/Terminals

Type of electrical connection	
• for auxiliary and control current circuit	AS-i insulation displacement method

Safety related data

Safety Integrity Level (SIL) acc. to IEC 61508	SIL3
---	------

Ambient conditions

Ambient temperature	
• during operation	-25 ... +70 °C

Inputs/ Outputs

Number of digital inputs	2
• safety-related	2
Number of digital outputs	1

Installation/ mounting/ dimensions

Mounting type	front mounting
Height	61 mm
Width	30 mm
Depth	52 mm

Certificates/approvals

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates	other
 UL		sonstig  EG-Konf.	spezielle Prüfbescheinigungen n	Bestätigungen

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SF5402-1AB05>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SF5402-1AB05>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SF5402-1AB05>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SF5402-1AB05&lang=en

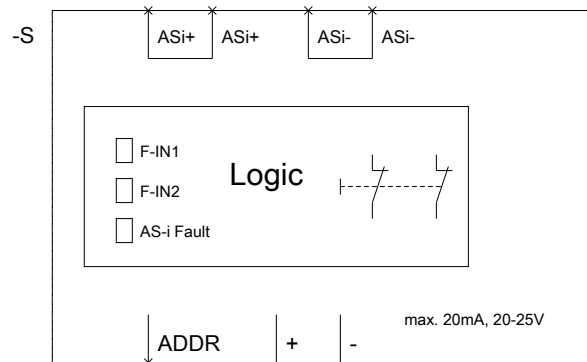

last modified:

10/17/2016