


AS-I FRONT PANEL MODULE A=SELEC.SWI.,2-ST.,LATCH.,BLACK C=ILLUMINATED PUSHBUTTON RED, D=ILLUMINATED PUSHB. WHITE

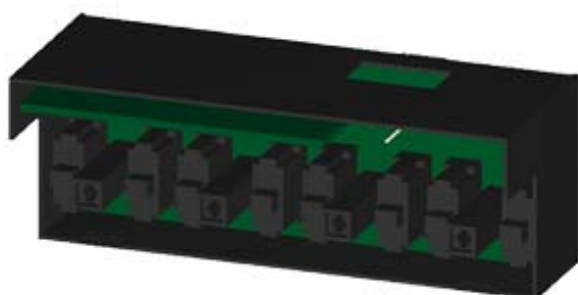

Enclosure:	
Design of the housing	AS-Interface front panel module
Shape of the enclosure front	rectangular
Material of the enclosure	plastic
Number of command points	4
Product component	
• protective collar	No
Color	
• of top part of the enclosure	black
Delivery state	
• pre-wired on strip terminal	Yes
Mounting type of the enclosure	Vertical / horizontal
Actuator:	
Design of the operating mechanism	Knob / illuminated pushbutton
Product extension optional Light source	No
Color	
• of the actuating element	A = black / B = white / C = red / D = white
Material of the actuating element	plastic

Type of unlocking device	rotate-to-unlatch mechanism
Front ring:	
Product component front ring	Yes
Material of the front ring	metal
Color of the front ring	silver
Holder:	
Material of the holder	Metal
Contact block/ lampholder:	
Mounting type	Wedge base
Number of lampholders	3
Number of switching elements	4
General technical data:	
Product function	
• positive opening	No
• EMERGENCY OFF function	No
• EMERGENCY STOP function	No
Product component	
• Light source	Yes
Type of voltage	
• of the operating voltage	DC
Protection class IP	IP65
Vibration resistance	
• acc. to IEC 60068-2-6	20 ... 200 Hz: 5g
Equipment marking	
• acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	S
• acc. to DIN EN 61346-2	S
• acc. to DIN EN 81346-2	S
Operating voltage	
• at DC	
— rated value	26.5 ... 31.5 V
Operating voltage 1	
• at DC rated value	30 V
Supply voltage:	
Type of voltage of the supply voltage	
• of the light source	DC
Auxiliary circuit:	
Number of NC contacts	
• for auxiliary contacts	0
Number of NO contacts	

• for auxiliary contacts	4
Number of CO contacts	
• for auxiliary contacts	0

Connections/ Terminals:

Type of electrical connection on enclosure	With insulation-displacement terminal
Tightening torque of the screws in the bracket	1.4 ... 1.6 N·m

Ambient conditions:

Ambient temperature	
• during operation	-25 ... +70 °C
• during storage	-40 ... +80 °C

Installation/ mounting/ dimensions:

Mounting type	
• of contact blocks, socket, and accessories	Front mounting
• of AS-i slaves	Front mounting
Height	194 mm
Width	85 mm
Depth	64 mm
Shape of the installation opening	round
Mounting diameter	22 mm

Measuring circuit:

Product function	miscellaneous
-------------------------	---------------

Accessories:

Number of labels	4
Marking of the name plate for command devices	A = 0=SETUP 1=INTERL.OPER. / B = START/BASIC POSITION / C = DELETE FAULT / D = OPEN STOPPER
Color of the label	Black
Number of backing plates	0

Certificates/approvals

General Product Approval	Functional Safety/Safety of Machinery	other
---------------------------------	--	--------------



[sonstig](#)



[sonstig](#)

[Bestätigungen](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SF5874-4EK>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SF5874-4EK>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SF5874-4EK>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SF5874-4EK&lang=en

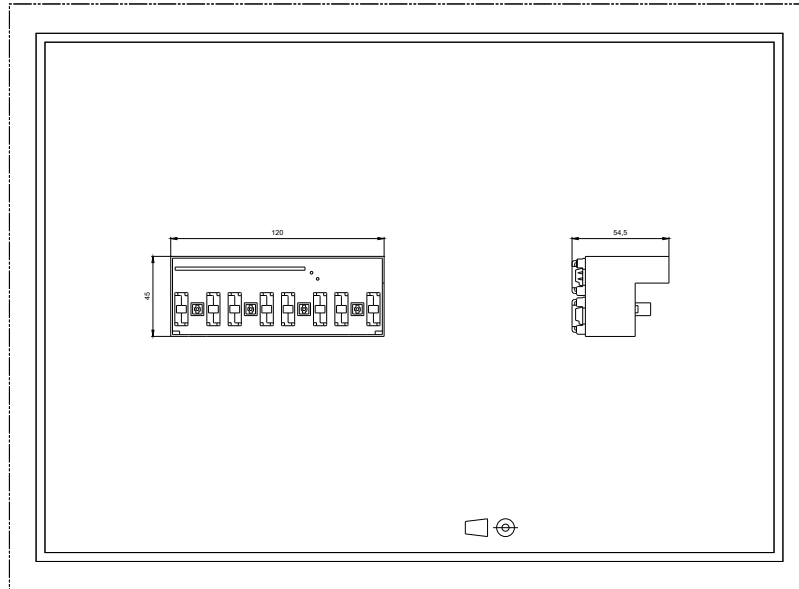

last modified:

10/07/2016