



Selector switch, illuminable, 22 mm, round, metal, shiny, amber, selector switch, short, 2 switch positions O-I, latching, actuating angle 90°, 10:30h/13:30h

|                                                       |                                  |
|-------------------------------------------------------|----------------------------------|
| product brand name                                    | SIRIUS ACT                       |
| product designation                                   | Selector switches                |
| design of the product                                 | Actuating/signaling element      |
| product type designation                              | 3SU1                             |
| product line                                          | Metal, shiny, 22 mm              |
| <b>Enclosure</b>                                      |                                  |
| number of command points                              | 1                                |
| <b>Actuator</b>                                       |                                  |
| design of the actuating element                       | Selector, short                  |
| principle of operation of the actuating element       | latching, 90° (10:30 h/13:30 h)  |
| product extension optional                            |                                  |
| • light source                                        | Yes                              |
| • contact module                                      | Yes                              |
| color of the actuating element                        | amber                            |
| material of the actuating element                     | plastic                          |
| shape of the actuating element                        | Handle                           |
| outer diameter of the actuating element               | 32.3 mm                          |
| number of switching positions                         | 2                                |
| actuating angle                                       |                                  |
| • clockwise                                           | 90°                              |
| <b>Front ring</b>                                     |                                  |
| product component front ring                          | Yes                              |
| design of the front ring                              | standard                         |
| material of the front ring                            | Metal, high gloss                |
| color of the front ring                               | silver                           |
| <b>General technical data</b>                         |                                  |
| protection class IP                                   | IP66, IP67, IP69(IP69K)          |
| degree of protection NEMA rating                      | 1, 2, 3, 3R, 4, 4X, 12, 13       |
| shock resistance                                      |                                  |
| • according to IEC 60068-2-27                         | sinusoidal half-wave 15g / 11 ms |
| vibration resistance                                  |                                  |
| • according to IEC 60068-2-6                          | 10 ... 500 Hz: 5g                |
| operating frequency maximum                           | 1 800 1/h                        |
| mechanical service life (switching cycles) typical    | 1 000 000                        |
| reference code according to IEC 81346-2               | S                                |
| Substance Prohibitance (Date)                         | 10/01/2014                       |
| <b>Safety related data</b>                            |                                  |
| B10 value with high demand rate according to SN 31920 | 100 000                          |
| proportion of dangerous failures                      |                                  |

|                                                               |         |
|---------------------------------------------------------------|---------|
| • with low demand rate according to SN 31920                  | 20 %    |
| • with high demand rate according to SN 31920                 | 20 %    |
| failure rate [FIT] with low demand rate according to SN 31920 | 100 FIT |

| Ambient conditions                                             |                                                                    |
|----------------------------------------------------------------|--------------------------------------------------------------------|
| <b>ambient temperature</b>                                     |                                                                    |
| • during operation                                             | -25 ... +70 °C                                                     |
| • during storage                                               | -40 ... +80 °C                                                     |
| environmental category during operation according to IEC 60721 | 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%) |

| Installation/ mounting/ dimensions          |         |
|---------------------------------------------|---------|
| height                                      | 32.3 mm |
| width                                       | 32.3 mm |
| shape of the installation opening           | round   |
| mounting diameter                           | 22.3 mm |
| positive tolerance of installation diameter | 0.4 mm  |
| mounting height                             | 28.8 mm |
| installation width                          | 32.3 mm |
| installation depth                          | 25.4 mm |

| Certificates/ approvals  |                           |
|--------------------------|---------------------------|
| General Product Approval | Declaration of Conformity |



[Confirmation](#)



[UK Declaration of Conformity](#)

| Test Certificates | Marine / Shipping |
|-------------------|-------------------|
|-------------------|-------------------|

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



LRS



PRS



RINA

| Marine / Shipping | other |
|-------------------|-------|
|-------------------|-------|



[Confirmation](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1052-2BF00-0AA0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1052-2BF00-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1052-2BF00-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1052-2BF00-0AA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1052-2BF00-0AA0&lang=en)

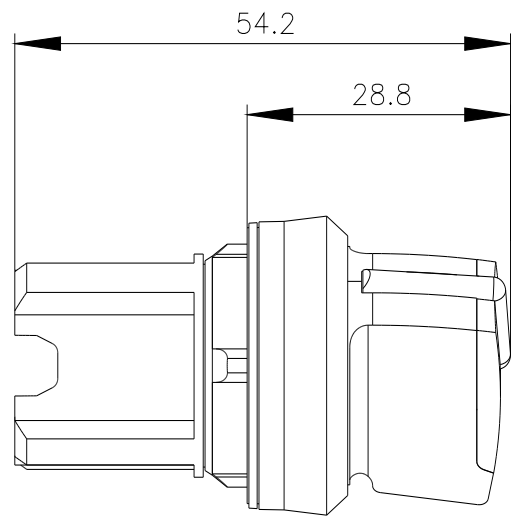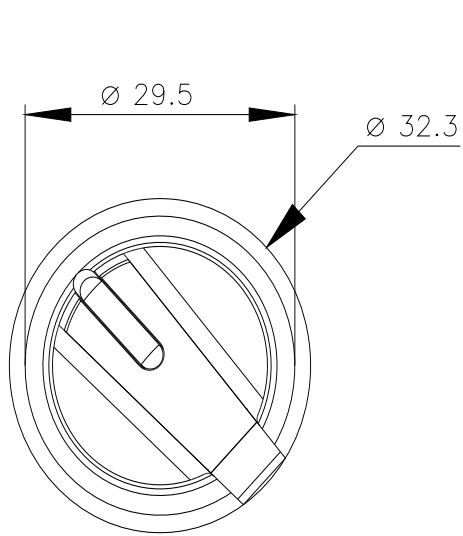

last modified:

1/26/2022 