



AS-Interface module, 2 safe inputs, 1 output, black, 4-pole connector with screw terminal, 2-pole and 4-pole connector with spring-type terminal, for front plate mounting

product brand name	SIRIUS ACT
product designation	AS-Interface module
product type designation	3SU1
General technical data	
product function	2F-DI / 1 DQ
degree of pollution	3
type of voltage	
• of the operating voltage	DC
• of the input voltage	DC
consumed current maximum	60 mA
protection class IP	IP20, clamping screw tightened
shock resistance for railway applications according to EN 61373	Category 1, Class B
vibration resistance for railway applications according to EN 61373	Category 1, Class B
reference code according to IEC 81346-2	K
Substance Prohibitation (Date)	10/01/2014
design of the slave type	2 F-DI + 1 DQ
AS-Interface slave profile	S-7.B.F
ID1 code	0...F
number of AS-i slaves	1
protocol is supported ASIsafe (Safety at work) protocol	Yes
operating voltage rated value	26.5 ... 31.6 V
operating voltage 1 at DC rated value	30 V
Communication/ Protocol	
protocol is supported AS-Interface protocol	Yes
Inputs/ Outputs	
number of digital inputs	
• safety-related	2
number of digital outputs	1; Unrestricted
Connections/ Terminals	
type of electrical connection	Screw connection + spring-type terminal
type of connectable conductor cross-sections	
• solid without core end processing	1x (0.2 ... 2.5 mm²)
• finely stranded with core end processing	1x (0.25 ... 2.5 mm²)
• finely stranded without core end processing	1x (0.2 ... 2.5 mm²)
• at AWG cables	1x (30 ... 12)
tightening torque with screw-type terminals	0.5 ... 0.6 N·m
Product Function	

suitability for use safety-related circuits	Yes		
Safety related data			
Safety Integrity Level (SIL) according to IEC 61508	3		
SIL Claim Limit (subsystem) according to EN 62061	SILCL 3		
performance level (PL) according to EN ISO 13849-1	e		
Safe failure fraction (SFF)	99 %		
average diagnostic coverage level (DCavg)	99 %		
PFHD with high demand rate according to EN 62061	0.0000000045 1/h		
PFDavg with low demand rate according to IEC 61508	0.000005		
category according to EN 954-1	4		
Ambient conditions			
ambient temperature			
• during operation	-25 ... +70 °C		
• during storage	-40 ... +80 °C		
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3 (without salt spray), 3K6 (with relative humidity of 10 ... 95%, no condensation in operation permitted)		
Installation/ mounting/ dimensions			
fastening method			
• of modules and accessories	Front plate mounting		
• of AS-i slaves	Frontplattenbefestigung		
height	42 mm		
width	30 mm		
depth	65.5 mm		
Certificates/ approvals			
General Product Approval	EMC	Functional Safety/Safety of Machinery	Declaration of Conformity

[Confirmation](#)



[Type Examination Certificate](#)

[UK Declaration of Conformity](#)

Declaration of Conformity	Test Certificates	other
---------------------------	-------------------	-------



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1400-1EC10-2AA0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1400-1EC10-2AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1400-1EC10-2AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1400-1EC10-2AA0&lang=en

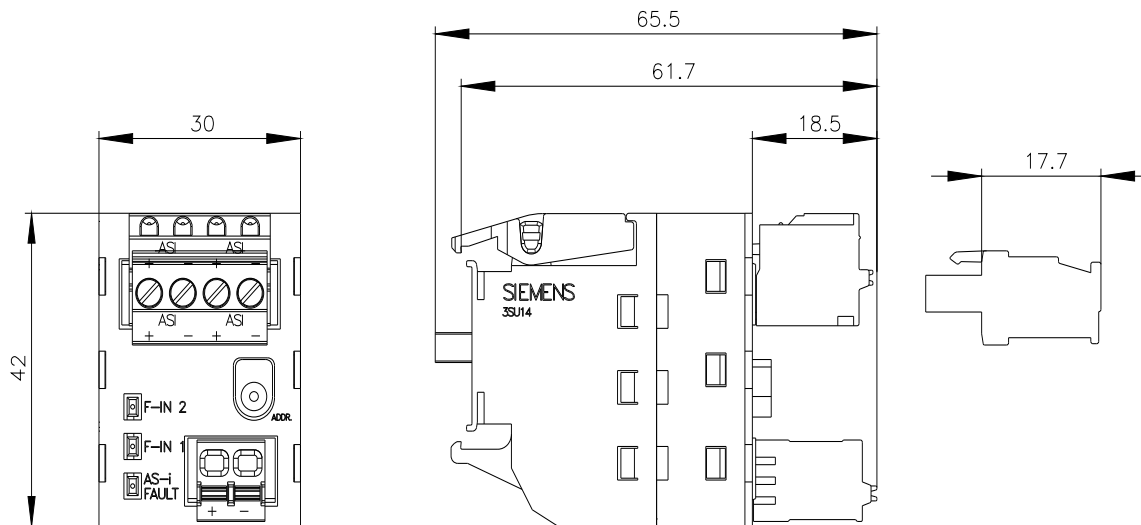

-K1


**AS-i Bus:
Slave:**



☐ F-IN1

☐ F-IN2

☐ AS-i Fault **Logic**



1 ASI+

2 ASI-

3 ASI+

4 ASI-

+

-

ADDR

last modified:

3/22/2021

