

LED module with integrated LED 24 V AC/DC, blue, screw terminal, for front plate mounting, Z = minimum order quantity 1 or a multiple thereof



product brand name	SIRIUS ACT
product designation	LED module
product type designation	3SU1
General technical data	
• product component diode	Yes
• product component lamp transformer	No
• product component light source	Yes
• product component series resistor	No
insulation voltage	
• rated value	320 V
degree of pollution	3
type of voltage	
• of the operating voltage	AC/DC
• of the operating voltage for actuation	AC/DC
surge voltage resistance rated value	4 kV
• consumed current maximum	25 mA
protection class IP	
• of the enclosure	IP40
• of the terminal	IP20

• shock resistance acc. to IEC 60068-2-27 • Shock resistance for railway applications acc. to DIN EN 61373	Sinusoidal half-wave 50g / 11 ms Category 1, Class B
• vibration resistance acc. to IEC 60068-2-6 • Vibration resistance for railway applications acc. to DIN EN 61373	10 ... 500 Hz: 5g Category 1, Class B
Operating period typical	100 000 h
reference code acc. to DIN EN 81346-2	P
reference code acc. to DIN EN 61346-2	P
Operating voltage 1	
• at AC — at 50 Hz rated value — at 60 Hz rated value • at DC rated value	24 V 24 V 24 V
Relative positive tolerance of the operating voltage	20 %
Relative negative tolerance of the operating voltage	20 %

Control circuit/ Control

inrush current maximum	2 A
-------------------------------	-----

Connections/ Terminals

• type of electrical connection	screw-type terminals
• Type of connectable conductor cross-sections solid with core end processing	2x (0.5 ... 0.75 mm ²)
• Type of connectable conductor cross-sections solid without core end processing	2x (1.0 ... 1.5 mm ²)
• Type of connectable conductor cross-sections finely stranded with core end processing	2x (0.5 ... 1.5 mm ²)
• Type of connectable conductor cross-sections finely stranded without core end processing	2x (1,0 ... 1,5 mm ²)
• type of connectable conductor cross-sections at AWG conductors	2x (18 ... 14)
• tightening torque with screw-type terminals	0.8 ... 0.9 N·m

Lamp

type of light source	LED
color of the light source	blue
Light intensity	280 ... 710 mcd
• certificate of suitability ATEX • certificate of suitability IECEx	No No

Ambient conditions

• ambient temperature during operation • ambient temperature during storage	-25 ... +70 °C -40 ... +80 °C
Environmental category during operation acc. to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95 %, no condensation in operation permitted)

Installation/ mounting/ dimensions

• Mounting type of modules and accessories	Front plate mounting
height	33.2 mm
width	9.8 mm
depth	29.4 mm

Certificates/ approvals

General Product Approval			EMC	Declaration of Conformity	
 CCC	 CSA	 EAC	 RCM	Miscellaneous	 EG-Konf.

Test Certificates	Marine / Shipping				
Type Test Certificates/Test Report	Special Test Certificate	 ABS	 LRS	 PRS	 RINA

Marine / Shipping	other
 RMRS	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1401-1BB50-1AA0-Z X01>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1401-1BB50-1AA0-Z X01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3SU1401-1BB50-1AA0-Z X01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1401-1BB50-1AA0-Z X01&lang=en

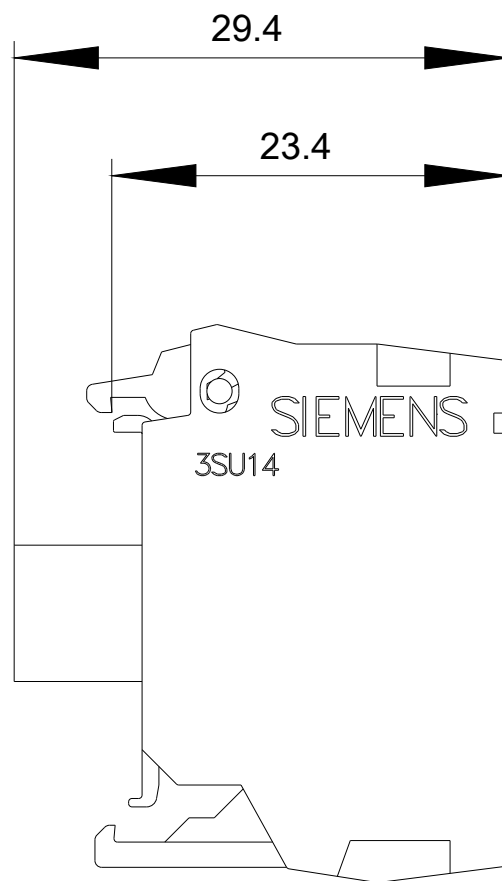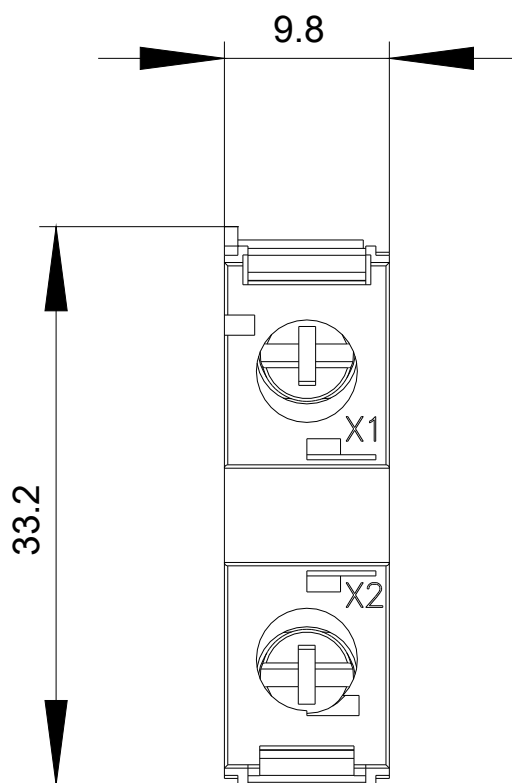

24 V AC/DC
-P

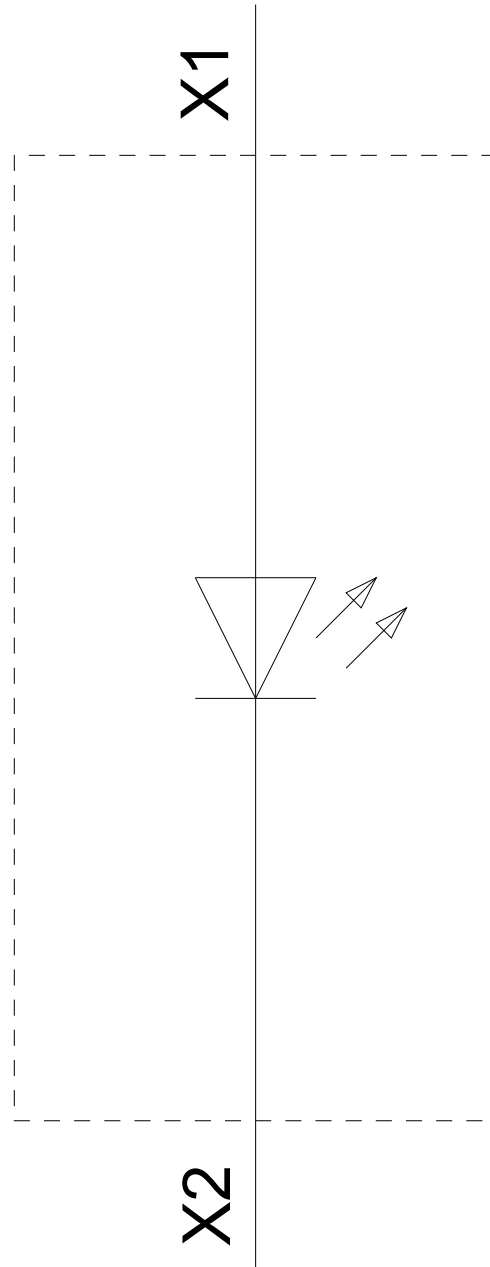

last modified:

08/31/2020