

ENCLOSURE FOR COMMAND DEVICES, 22MM, ROUND,  
ENCLOSURE MATERIAL PLASTIC, ENCLOSURE TOP PART  
GRAY, 3 COMMAND POINTS PLASTIC, RECESS FOR LABELS,  
UNEQUIPPED



Figure similar

|                                                 |                             |
|-------------------------------------------------|-----------------------------|
| product brandname                               | SIRIUS ACT                  |
| Enclosure                                       |                             |
| Design of the housing                           | with recess for label       |
| Shape of the enclosure front                    | rectangular                 |
| Material of the enclosure                       | plastic                     |
| Number of command points                        | 3                           |
| Product component                               |                             |
| • protective collar                             | No                          |
| Color                                           |                             |
| • of top part of the enclosure                  | grey                        |
| Mounting type of the enclosure                  | Vertical / horizontal       |
| General technical data                          |                             |
| Protection class IP                             | IP66, IP67, IP69(IP69K)     |
| Degree of protection NEMA rating                | NEMA 1, 2, 3, 3R, 4, 4X, 12 |
| Shock resistance                                |                             |
| • for railway applications acc. to DIN EN 61373 | Category 1, Class B         |
| Vibration resistance                            |                             |

- for railway applications acc. to DIN EN 61373

Category 1, Class B

#### Mechanical data

|                  |         |
|------------------|---------|
| Cable entry type | Without |
|------------------|---------|

#### Installation/ mounting/ dimensions

|                                             |         |
|---------------------------------------------|---------|
| Height                                      | 154 mm  |
| Width                                       | 85 mm   |
| Depth                                       | 64 mm   |
| Mounting diameter                           | 22.3 mm |
| Positive tolerance of installation diameter | 0.4 mm  |

#### Certificates/approvals

##### General Product Approval

##### Declaration of Conformity

##### Test Certificates



[Werksbescheinigung](#)

##### Test Certificates

##### other

[spezielle  
Prüfbescheinigungen](#)

[Bestätigungen](#)

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1803-0AA00-0AB1>

##### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1803-0AA00-0AB1>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1803-0AA00-0AB1>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1803-0AA00-0AB1&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1803-0AA00-0AB1&lang=en)

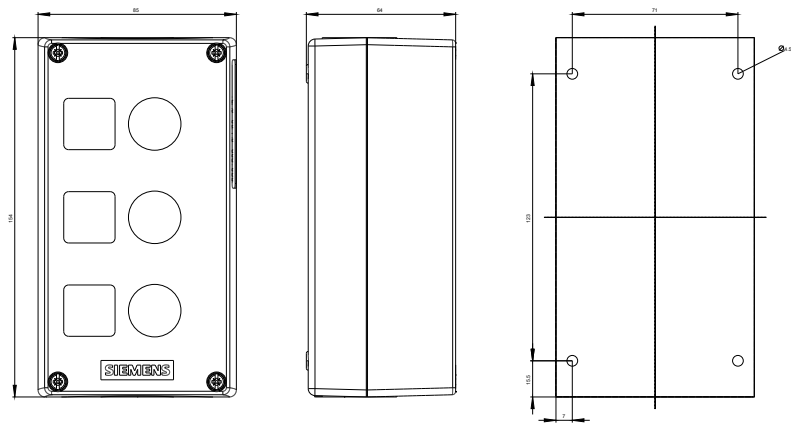

last modified:

12/19/2016