# **SIEMENS**

### **Product data sheet**

3TC4417-0CY80-0AA0



CONTACTOR SIZE 2, 2-POLE DC-3 AND 5, 32 A AUX. SWITCHES 22 (2NO+2NC) DC OPERATION 750 V DC, 0.7...1.2 US

| General details:   |    |         |  |  |
|--|----|---------|--|--|
| Size of the contactor  |    | 2       |  |  |
| Number of poles  |    | 2       |  |  |
| Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 |    | К       |  |  |
| Reference code / according to DIN EN 61346-2   |    | Q       |  |  |
| Protection class IP  |    | IP00    |  |  |
| Ambient temperature  |    |         |  |  |
| during operating   | °C | -25 +55 |  |  |
| Control circuit:   |    |         |  |  |
| Type of voltage  |    | DC      |  |  |
| Control supply voltage   |    |         |  |  |
| • for DC / rated value / minimum   | V  | 750     |  |  |
| • for DC / rated value / maximum   | V  | 750     |  |  |
| Main circuit:  |    |         |  |  |
| Number of NO contacts / for main contacts  |    | 2       |  |  |
| Number of NC contacts / for main contacts  |    | 0       |  |  |
| Operating current  |    |         |  |  |
| • at DC-3 / at DC-5 / at 440 V / rated value   | Α  | 29      |  |  |
|  |    |         |  |  |

| • at DC-3 / at DC-5 / at 220 V / rated value | Α  | 32  |
|--|----|-----|
| • at DC-3 / at DC-5 / at 600 V / rated value | Α  | 21  |
| • at DC-3 / at DC-5 / at 750 V / rated value | Α  | 7.5 |
| Service power                                |    |     |
| • at DC-3 / at DC-5 / at 110 V / rated value | kW | 2.5 |
| • at DC-3 / at DC-5 / at 220 V / rated value | kW | 5   |
| • at DC-3 / at DC-5 / at 440 V / rated value | kW | 9   |
| • at DC-3 / at DC-5 / at 600 V / rated value | kW | 9   |
| • at DC-3 / at DC-5 / at 750 V / rated value | kW | 4   |
|  |    |     |

| Auxiliary circuit:                                      |    |  |
|---|----|--|
| Identification number and letter for switching elements | 22 |  |
| Number of NO contacts / for auxiliary contacts          | 2  |  |
| Number of NC contacts / for auxiliary contacts          | 2  |  |
| Number of changeover contacts / for auxiliary contacts  | 0  |  |

| Connection type:  |                      |  |
|---|----------------------|--|
| Design of the electrical connection / for main current circuit                  | screw-type terminals |  |
| Design of the electrical connection / for auxiliary and control current circuit | screw-type terminals |  |

| Mechanical design:                  |    |  |  |
|-------------------------------------|----|--|--|
| Mounting type                       |    | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022 |  |
| Mounting type / series installation |    | Yes  |  |
| Width                               | mm | 70   |  |
| Height                              | mm | 85   |  |
| Depth                               | mm | 145  |  |

## Certificates/approvals:

General Product Approval

**Test Certificates** 

**Shipping Approval** 









Special Test Certificate



#### other

Declaration of Conformity

other

#### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

#### Cax online generator:


http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3TC4417-0CY80-0AA0/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3TC4417-0CY80-0AA0

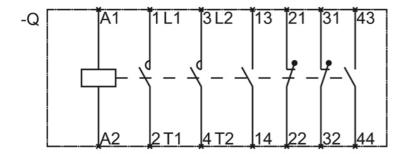

last change: Aug 4, 2014