SIEMENS

Product data sheet 3TF6944-0CS7

CONTACTOR SIZE 14, 3-POLE AC-3, 450KW, 400/380V (690V) AUXILIARY CONTACTS 44 (4NO+4NC) AC OPERATION AC 500 TO 600V 50/60HZ

| General details: | | | | |
|--|----|--------------|--|--|
| Size of the contactor | | 14 | | |
| Protection class IP / on the front | | IP00 | | |
| Ambient temperature / during operating | °C | 5525 | | |
| Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 | | К | | |
| Reference code / according to DIN EN 61346-2 | | Q | | |
| Main circuit: | | | | |
| Number of poles / for main current circuit | | 3 | | |
| Operating current / at AC-1 / at 400 V | | | | |
| at 40 °C ambient temperature / rated value | Α | 910 | | |
| Number of NC contacts / for main contacts | | 0 | | |
| Number of NO contacts / for main contacts | | 3 | | |
| Operating current / at AC-3 / at 400 V / rated value | Α | 820 | | |
| Operating performance | | | | |
| • at AC-3 / at 400 V / rated value | kW | 450 | | |
| • at AC-1 / at 400 V / rated value | kW | 558 | | |
| Control circuit: | | | | |
| Design of activation / of the operating mechanism | | conventional | | |
| Voltage type / of control feed voltage | | AC | | |
| Control supply voltage frequency | | | | |
| • 1 / rated value | Hz | 50 | | |
| • 2 / rated value | Hz | 60 | | |
| Control supply voltage | | | | |
| • at 50 Hz / at AC | | | | |
| • rated value | V | 500 600 | | |
| • at 60 Hz / at AC | | | | |
| • rated value | V | 500 600 | | |
| Auxiliary circuit: | | | | |
| Number of NC contacts / for auxiliary contacts | | | | |

| lagging switching | 0 |
|--|---|
| instantaneous switching | 4 |
| Number of NO contacts / for auxiliary contacts | |
| leading switching | 0 |
| • instantaneous switching | 4 |

| Connection type: | | | | |
|---|--|----------------------|--|--|
| Design of the electrical connection | | | | |
| for main current circuit | | screw-type terminals | | |
| for auxiliary and control current circuit | | screw-type terminals | | |
| Identification number and letter for switching elements | | 44 | | |

| Mechanical design: | | | |
|-------------------------------------|----|--------------|--|
| Mounting type | | screw fixing | |
| Mounting type / series installation | | Yes | |
| Width | mm | 230 | |
| Height | mm | 295 | |
| Depth | mm | 237 | |

Certificates/approvals:

General Product Approval

Functional Safety / Safety of Machinery











Type Examination

Declaration of Conformity

Test Certificates



Special Test Certificate Type Test
Certificates/Test
Report

Shipping Approval













other

Declaration of Conformity

other

Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator:


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3TF6944-0CS7/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TF6944-0CS7

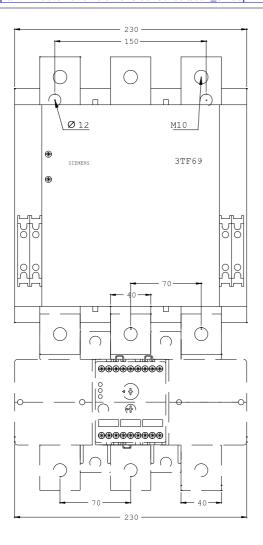

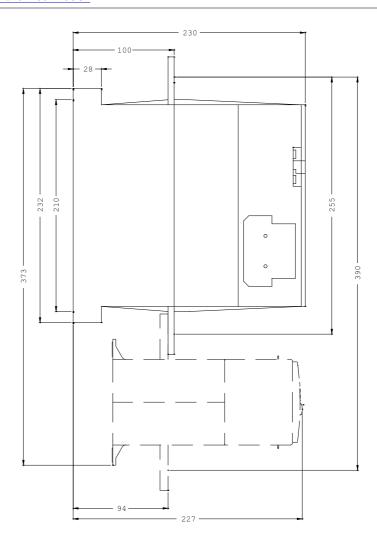

last change: Jul 21, 2014