



CONTACTOR RELAY 55E ACCORDING TO DIN EN 50 011
5NO+5NC,
1 OVERLAPPING CONTACT SCREW TERMINALS WITH
SURGE LIMITER (VARISTOR) AC OPERATION AC
230/220V 50HZ,
276/264V 60HZ

General details:

Size of the contactor		0
Ambient temperature		
• during operating	°C	-25 ... +55
Protection class IP / on the front		IP20
Reference code		
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K
• according to DIN EN 61346-2		K
• according to DIN EN 81346-2		K

Control circuit:

Voltage type / of control feed voltage		AC
Control supply voltage frequency		
• 1	Hz	50
• 2	Hz	60
Control supply voltage		
• at 50 Hz / at AC / rated value	V	220
• at 60 Hz / at AC / rated value	V	264

Auxiliary circuit:

Operating current / at AC-15 • at 230 V / rated value • at 400 V / rated value	A	10
	A	6
Identification number and letter for switching elements		55 E, 1U
Number of NC contacts / for auxiliary contacts • lagging switching • delayed switching • asynchronous switching		4
		1
		0
		1
Number of NO contacts / for auxiliary contacts • leading switching • delayed switching • asynchronous switching		4
		1
		0
		1
Number of changeover contacts / for auxiliary contacts		0

Connection type:

Design of the surge suppressor		with varistor
Design of the electrical connection / for auxiliary and control current circuit		screw-type terminals

Mechanical design:

Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
Width	mm	55
Height	mm	78
Depth	mm	102

Certificates/approvals:

General Product Approval



Functional Safety / Safety of Machinery

[Type Examination](#)

Test Certificates

[other](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Shipping Approval



[other](#)

[Declaration of Conformity](#)

[other](#)

[Environmental Confirmations](#)

Safety:

Protection against electrical shock		finger-safe
B10 value / with high demand rate		

- according to SN 31920

- note

T1 value / for proof test interval or service life / according to IEC 61508

	1,000,000
	With 0.3 x le
a	20

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3TH4394-0HP0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TH4394-0HP0

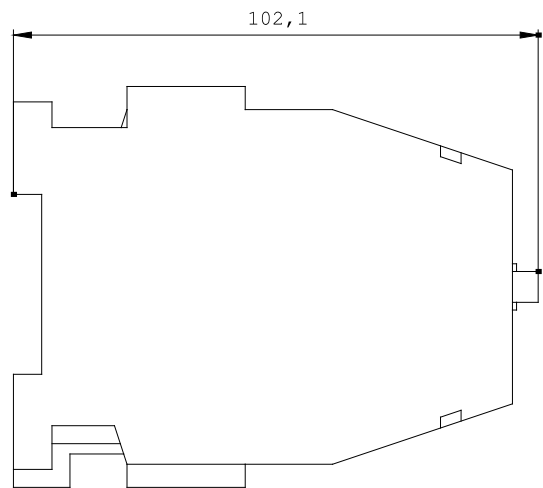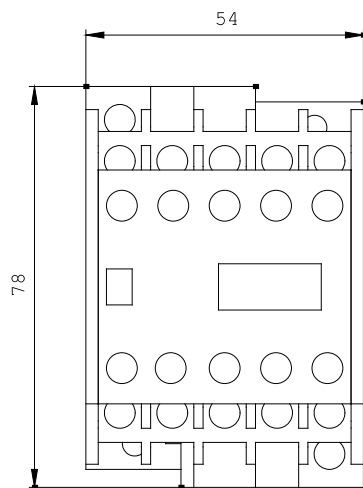

\W9.44.
\W9.29

last change:

Jun 16, 2014