


CLOSING DELAY DEVICE N.T.C. THERMISTOR
100MS, AC 220 TO 230V, 50/60HZ



General technical data:		
Product designation		ON-delay timer for contactor
Design of the product		ON-delay timer
Ambient temperature		
• during storage	°C	-40 ... +80
• during operation	°C	-20 ... +60
Product component protective wiring		No
Installation/ mounting/ dimensions:		
Mounting position		any
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Connections/ Terminals:		
Type of electrical connection for auxiliary and control current circuit		screw-type terminals
Certificates/ approvals:		

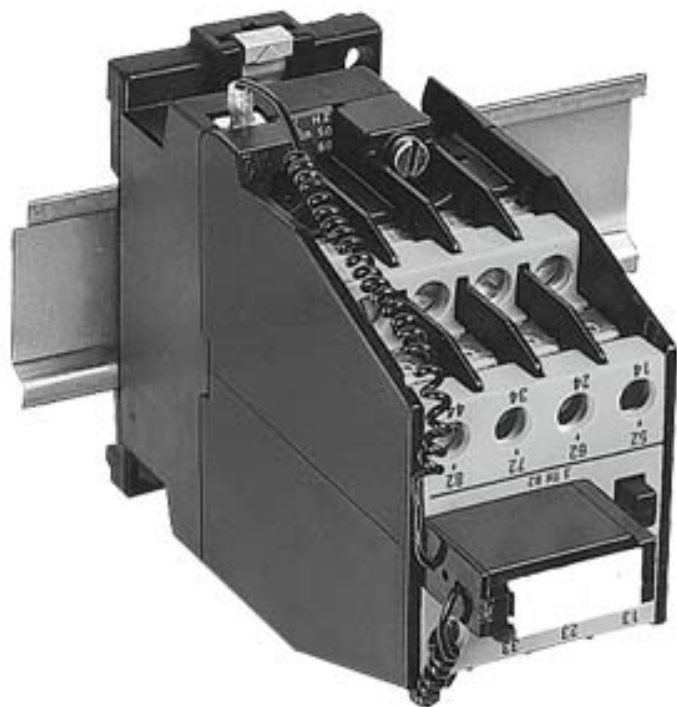

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrymall>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TX4180-0A>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3TX4180-0A>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TX4180-0A&lang=en

last modified:

10/07/2016