

CONNECTING COMB FOR 3TX7014,
3TX7015 AND 3RS17 WITH 3-WAY SEPARATION 6.2 MM,
16-POLE, BLUE,
CURRENT CARRYING CAPACITY 6A



General technical details:

Switching behaviour

monostable

Operating current / of the auxiliary contacts

- at DC-13
 - at 24 V
 - at 110 V
 - at 230 V
- at AC-15
 - at 230 V

A	1
A	0.2
A	0.1
A	3

Mechanical design:

Design of the electrical connection / jumper socket

No

Design of the relay operating mechanism

poled

Design of the switching function

- guided

No

Product component / jumper socket

No

Ambient conditions:

Protection class IP

IP00

Certificates/approvals:



[Declaration of
Conformity](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3TX7014-7AA00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TX7014-7AA00

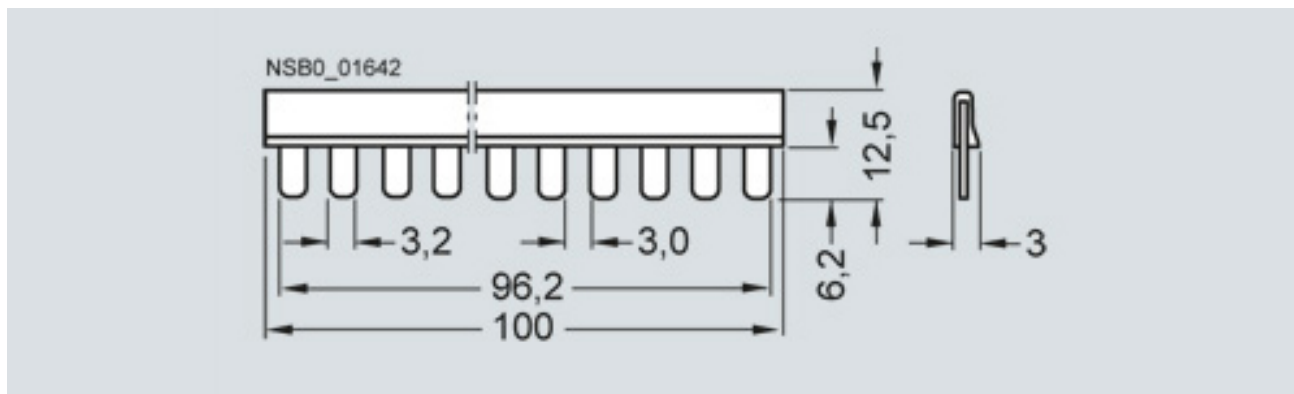

last change:

Jun 16, 2014