

SIMOCODE-DP BASIC UNIT PROFIBUS-DP INTERFACE 1.5 MBAUD, RS485 4I/4O FREELY PARAMETERIZABLE US: AC 230V, 50/60HZ 1.25-6.3A, WIDTH 70MM, INPUT THERMISTOR MOTOR PROTECTION OUTPUTS MONOSTABLE



Figure similar

General technical data:	
Protection class IP	IP20
Equipment marking	
• acc. to DIN EN 61346-2	F
• acc. to DIN EN 81346-2	F
Inputs/ Outputs:	
Number of inputs	4
Number of outputs	4
Installation/ mounting/ dimensions:	
Mounting type	screw and snap-on mounting
Height	85 mm
Width	70 mm
Depth	132.5 mm
Connections/ Terminals:	
Type of electrical connection	
• for main current circuit	straight-through transformers
• for auxiliary and control current circuit	screw-type terminals

Ambient conditions:	
Ambient temperature	
• during operation	-25 ... +60 °C

Main circuit:	
Number of poles for main current circuit	3
Adjustable response value current of the current-dependent overload release	1.25 ... 6.3 A
Operating voltage	
• Rated value	110 ... 690 V
Operating frequency Rated value	50 ... 60 Hz

Control circuit/ Control:	
Type of voltage	AC
Control supply voltage at AC	
• at 50 Hz Rated value	230 ... 230 V
• at 60 Hz Rated value	230 ... 230 V
Supply voltage frequency for auxiliary and control current circuit Rated value	50 ... 60 Hz

Auxiliary circuit:	
Number of NO contacts	
• for auxiliary contacts	4

Certificates/ approvals:

General Product Approval	EMC	For use in hazardous locations
 CCC	 C-TICK	Explosionsschutzzertifikat  ATEX

Test Certificates	Shipping Approval	other
spezielle Prüfbescheinigungen  DNV	 LRS	sonstige Bestätigungen

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)


<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF50013AN001>



last modified:

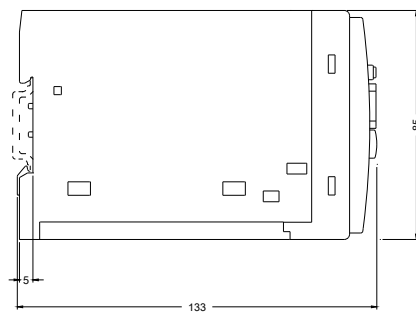

20.07.2015