

SIMOCODE-DP BASIC UNIT PROFIBUS-DP INTERFACE 1.5
MBAUD, RS485 4I/4O FREELY PARAMETERIZABLE US: AC 230V,
50/60HZ 6.3A - 25A, WIDTH 70MM, INPUT THERMISTOR MOTOR
PROTECTION OUTPUTS MONOSTABLE



Figure similar

General technical data:	
Protection class IP	IP20
Equipment marking	
• acc. to DIN EN 61346-2	F
• acc. to DIN EN 81346-2	F
Inputs/ Outputs:	
Number of inputs	4
Number of outputs	4
Installation/ mounting/ dimensions:	
Mounting type	screw and snap-on mounting
Height	85 mm
Width	70 mm
Depth	132.5 mm
Connections/ Terminals:	
Type of electrical connection	
• for main current circuit	straight-through transformers
• for auxiliary and control current circuit	screw-type terminals

Ambient conditions:**Ambient temperature**

- during operation

-25 ... +60 °C

Main circuit:**Number of poles for main current circuit**

3

Adjustable response value current of the current-dependent overload release

6.3 ... 25 A

Operating voltage

- Rated value

110 ... 690 V

Operating frequency Rated value

50 ... 60 Hz

Control circuit/ Control:**Type of voltage**

AC

Control supply voltage at AC

- at 50 Hz Rated value
- at 60 Hz Rated value

230 ... 230 V

230 ... 230 V

Supply voltage frequency for auxiliary and control current circuit Rated value

50 ... 60 Hz

Auxiliary circuit:**Number of NO contacts**

- for auxiliary contacts

4

Certificates/ approvals:**General Product Approval****For use in hazardous locations**

[Explosionsschutzzertifikat](#)

**Test Certificates****Shipping Approval****other**

[spezielle Prüfbescheinigungen](#)



[Bestätigungen](#)

[sonstig](#)

Further information**Information- and Downloadcenter (Catalogs, Brochures,...)**


<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)


<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF50113AN001>



last modified:

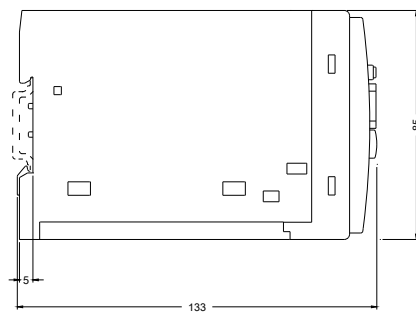

20.07.2015