



BASIC UNIT 2 SIMOCODE PRO V;
 PROFIBUS DP INTERFACE 12 MBIT/S, RS485;
 4I/3O FREELY PARAMETERIZABLE;
 US: DC 24V;
 THERMISTOR MOTOR PROTECTION;
 RELAY OUTPUTS MONOSTABLE;
 EXPANDABLE BY EXPANSION MODULES

Certificates/approvals:

General Product Approval

EMC



CCC



CSA



GOST



UL



C-TICK

For use in hazardous locations

Test Certificates



ATEX

[Explosion Protection Certificate](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Shipping Approval



ABS



DNV



LRS

other

[Confirmation](#)

[Declaration of Conformity](#)



Profibus

[PROFINET-Certification](#)

[PROFISafe-Certification](#)

[other](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)



<http://www.siemens.com/industrial-controls/catalogs>


Industry Mall (Online ordering system)
<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator
<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WW/view/en/3UF7010-1AB00-0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3UF7010-1AB00-0

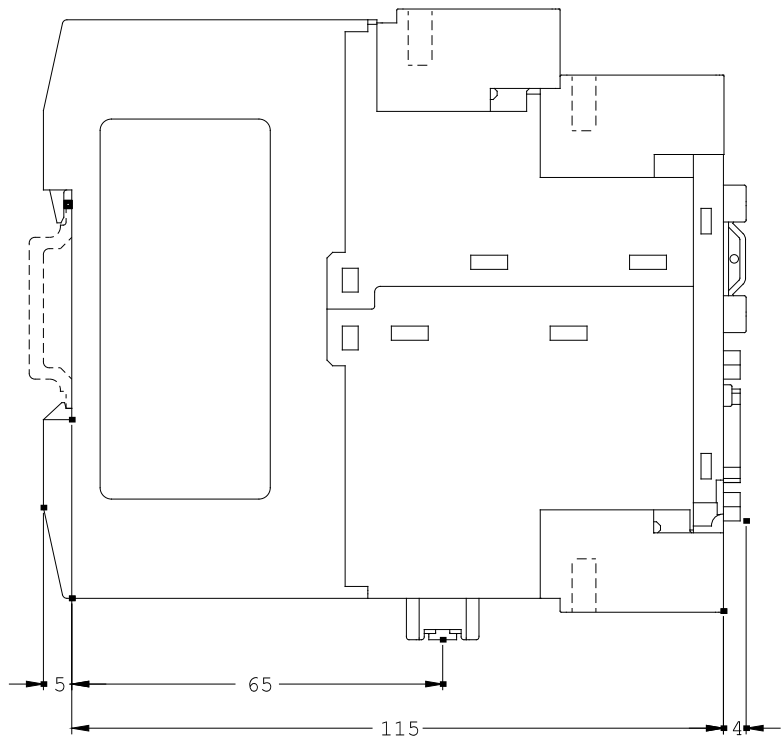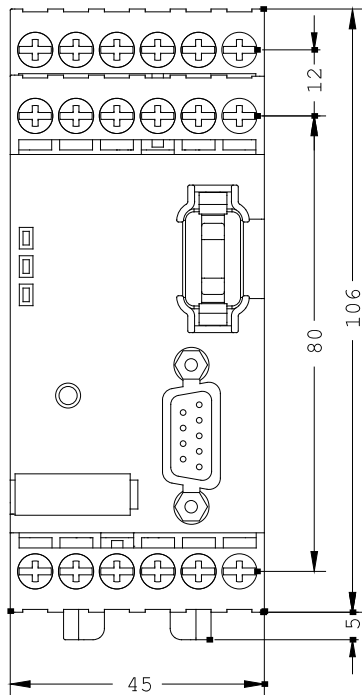

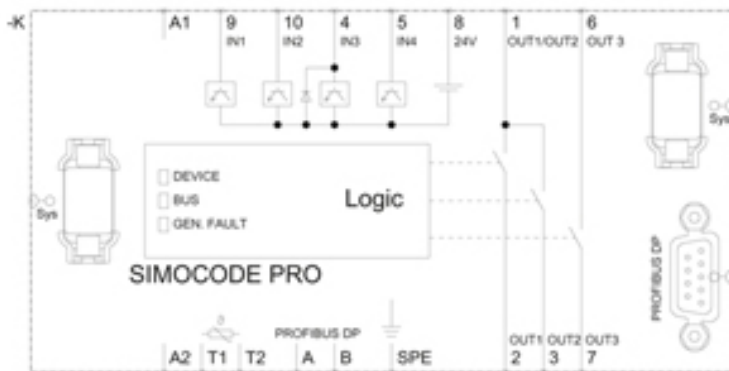

last change: