



BASIC UNIT 2 SIMOCODE PRO V;
 PROFIBUS DP INTERFACE 12 MBIT/S, RS485;
 4I/3O FREELY PARAMETERIZABLE;
 US: AC/DC 110-240V;
 INPUT F. THERMISTOR MOTOR PROTECTION;
 RELAY OUTPUTS MONOSTABLE;
 EXPANDABLE BY EXPANSION MODULES

Certificates/approvals:

General Product Approval

EMC



CCC



CSA



GOST



UL



C-TICK

For use in hazardous locations

Test Certificates



ATEX

[Explosion Protection Certificate](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Shipping Approval



ABS



DNV



LRS

other

[Confirmation](#)

[Declaration of Conformity](#)



Profibus

[PROFINET-Certification](#)



[PROFISafe-Certification](#)


[other](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

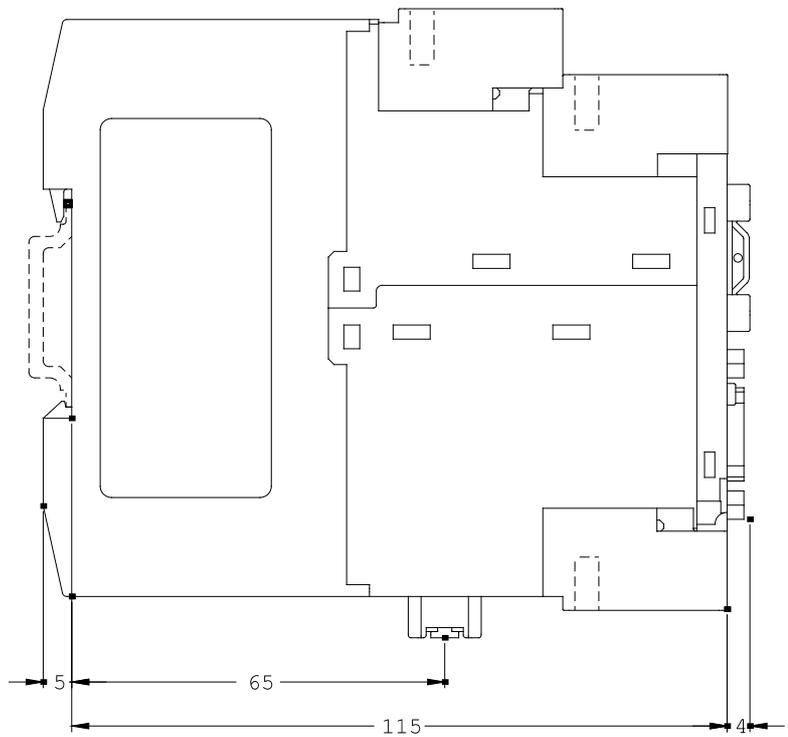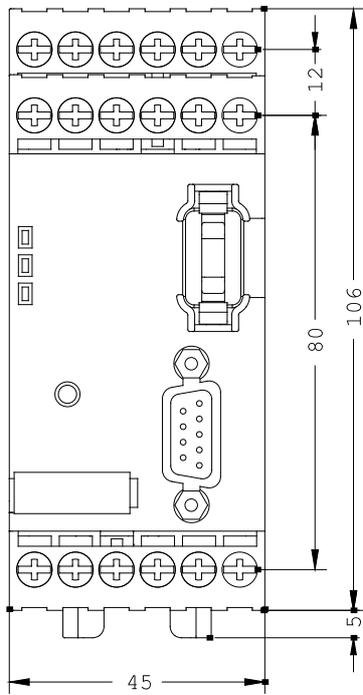

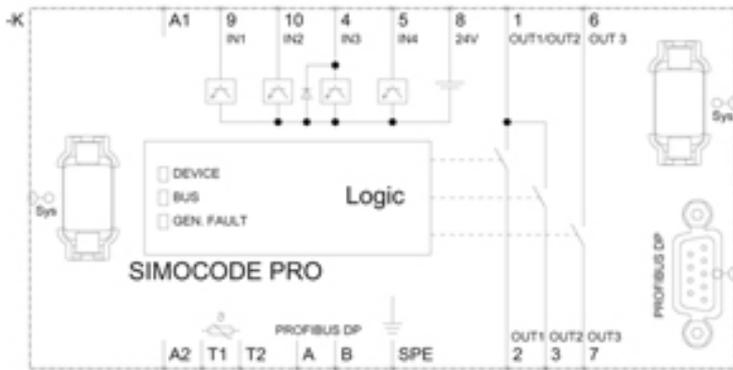

last change: