



CURRENT MEASURING MODULE;
SET CURRENT 2,4...25A;
OVERALL WIDTH 45MM;
STRAIGHT-THROUGH CT

General technical data:

product brand name		SIRIUS
product designation		current measuring module
Protection class IP		IP20
mounting position		any
EMC immunity to interference / according to IEC 60947-1		corresponds to degree of severity 3
Conductor-bound parasitic coupling BURST		2 kV
Conductor-bound parasitic coupling conductor-earth SURGE / according to IEC 61000-4-5		2 kV
Conductor-bound parasitic coupling conductor-conductor SURGE / according to IEC 61000-4-5		1 kV
Field-bound parasitic coupling / according to IEC 61000-4-3		10 V/m
EMC emitted interference / according to IEC 60947-1		class A
Resistance against vibration		1-6 Hz / 15 mm; 6-500 Hz / 2 g
Impulse voltage resistance / rated value	V	6,000
Insulation voltage / rated value	V	690
Number of outputs / as contact-affected switching element		0
Adjustable response current		
• of the current-dependent overload release		
• initial value	A	2.4
• final value	A	25

Product component		
• input for thermistor connection		No
Product function		
• voltage detection		No
• current detection		Yes
Item designation		
• according to DIN EN 61346-2		F
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		F

Communication:

Product function

- bus-communication

No

Main circuit:

Number of poles / for main current circuit

3

Operating frequency

- rated value

Hz

50 ... 60

Operating voltage

- at 50 Hz / at AC / rated value
- at 60 Hz / at AC / rated value

V

110 ... 690

V

110 ... 690

Control circuit:

Type of voltage

- of the controlled supply voltage

AC

Installation/mounting/dimensions:

Type of mounting

screw and snap-on mounting

Width

mm

45

Height

mm

84

Depth

mm

45

Connections:

Product function

- removable terminal for auxiliary and control circuit

No

Design of the electrical connection

- for main current circuit

straight-through transformers

Ambient conditions:

Installation altitude / at a height over sea level / maximum

m

4,000

Ambient temperature

- during storage

°C

-40 ... +80

• during operating	°C	-25 ... +60
• during transport	°C	-40 ... +80
Relative humidity / during operating phase	%	5 ... 95

Certificates/approvals:

Verification of suitability

CE / UL / CSA / CCC / C-TICK / GOST / NOM / ATEX
/ NEPSI / ABS / DNV / GL / LRS / RoHS

Certificates/approvals:

General Product Approval

EMC



CCC



CSA



GOST



UL



C-TICK

For use in hazardous locations

Test Certificates

Shipping Approval



ATEX

[Explosion
Protection
Certificate](#)

[Special Test
Certificate](#)

[Type Test
Certificates/Test
Report](#)



ABS



DNV

other

[Confirmation](#)

[Declaration of
Conformity](#)



Profibus

[PROFINET-
Certification](#)

[PROFISafe-
Certification](#)

[other](#)

Safety:

Protection against electrical shock

finger-safe

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3UF7101-1AA00-0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3UF7101-1AA00-0

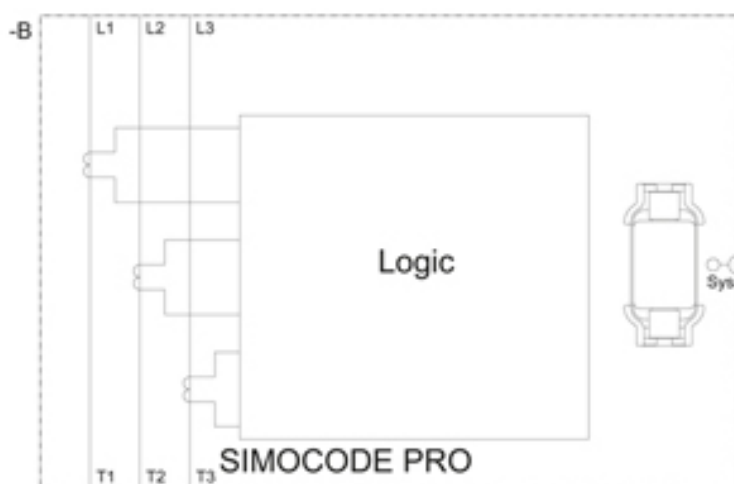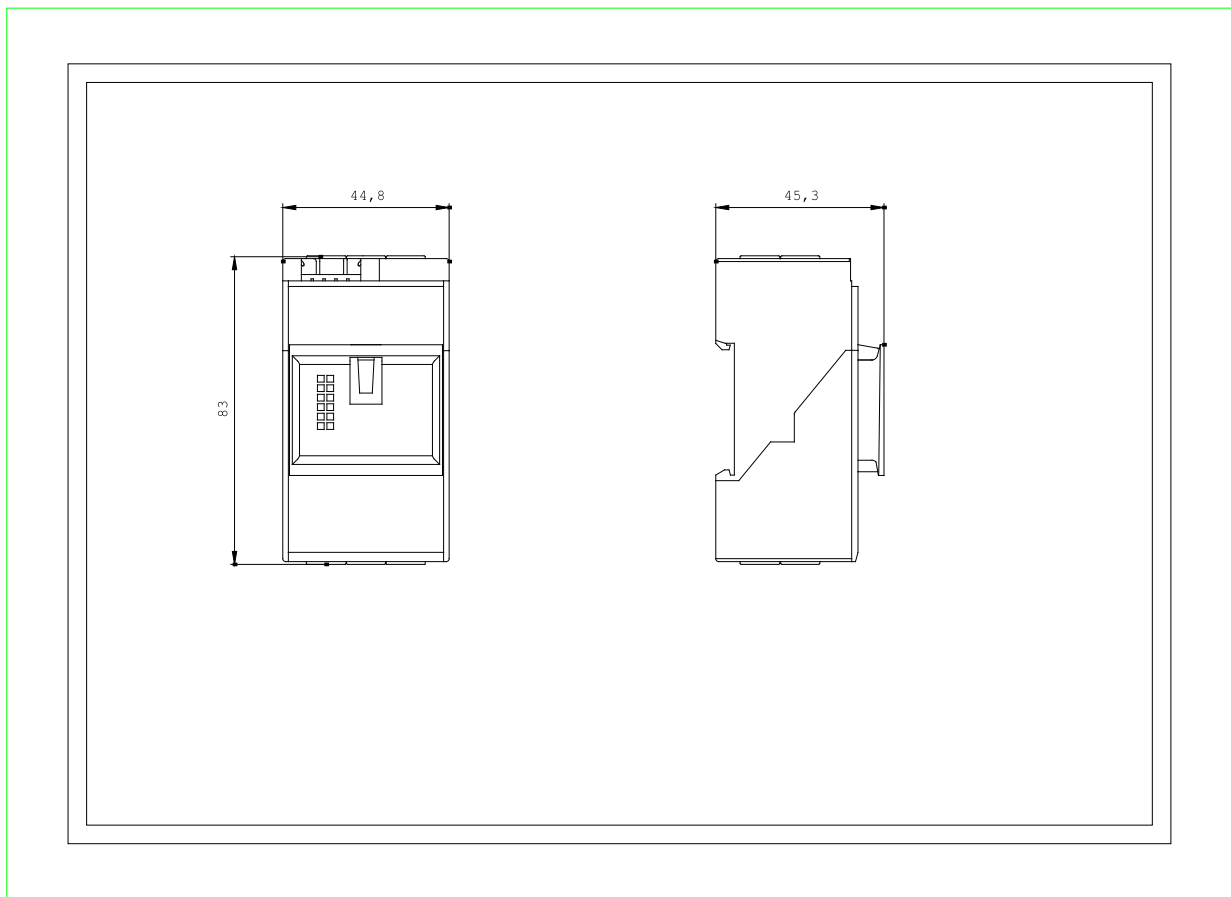

last change:

Feb 18, 2013