

PC CABLE,
FOR PC/PG COMMUNICATION WITH SIMOCODE PRO
OR SIRIUS 3RW44 SOFT STARTER OR MODULAR
SAFETY SYSTEM 3RK3 VIA THE SYSTEM INTERFACE



General technical data:

product brand name		SIRIUS
product designation		PC cable
Ambient temperature		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60
• during transport	°C	-40 ... +80
Relative humidity		
• during operating phase	%	5 ... 95

Certificates/approvals:

General Product Approval				EMC	For use in hazardous locations
 CCC	 CSA	 GOST	 UL	 C-TICK	Explosion Protection Certificate
Test Certificates		Shipping Approval			
Special Test Certificate		 ABS	 DNV	 GL	
other					
Confirmation	Declaration of Conformity	 Profibus	PROFINET-Certification	PROFISafe-Certification	other

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3UF7940-0AA00-0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3UF7940-0AA00-0

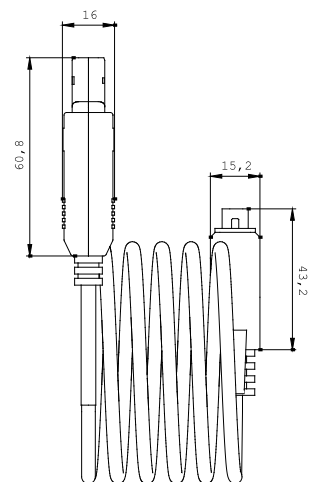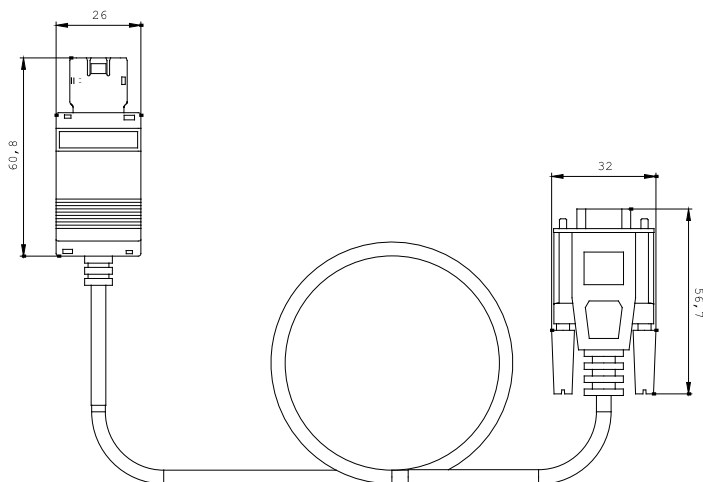

last change:

Feb 13, 2013