



CIRCUIT BREAKER 3VA1 IEC FRAME 100 BREAKING CAPACITY
CLASS B ICU=16KA @ 415 V 4-POLE, LINE PROTECTION
TM210, FTFM, IN=25A OVERLOAD PROTECTION IR=25A FIXED
SHORT CIRCUIT PROTECTION II=12,8 X IN NEUTRAL
UNPROTECTED BUSBAR CONNECTION SHUNT TRIP LEFT 208-
277 V AC 50/60 HZ 2 AUXILIARY SWITCH 1 TRIP ALARM SWITCH

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



CCC



VDE



[sonstig](#)



RCM



EG-Konf.

Test Certificates	Shipping Approval
-------------------	-------------------

[sonstig](#)

[Typprüfbescheinigung/Werkszeugnis](#)



ABS



BUREAU
VERITAS



GL



LRS

Shipping Approval	other
-------------------	-------



RMRS

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA1025-2ED42-0KH0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA1025-2ED42-0KH0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA1025-2ED42-0KH0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

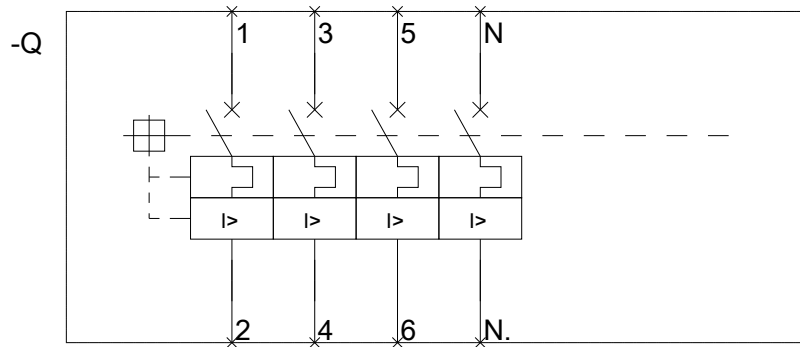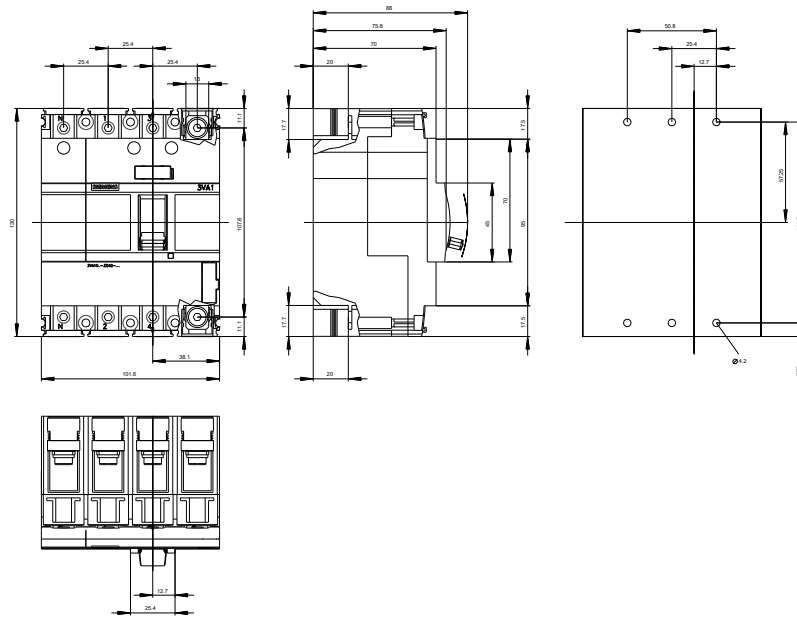

last modified:

11/01/2016