



CIRCUIT BREAKER 3VA1 IEC FRAME 160 BREAKING CAPACITY CLASS S ICU=36KA @ 415 V 4-POLE, LINE PROTECTION TM210, FTFM, IN=100A OVERLOAD PROTECTION IR=100A FIXED SHORT CIRCUIT PROTECTION II=10 X IN NEUTRAL PROTECTION 50% BUSBAR CONNECTION SHUNT TRIP LEFT 208-277 V AC 50/60 HZ 1 AUXILIARY SWITCH 1 TRIP ALARM SWITCH

Switching capacity according to IEC 60947

Operational short-circuit current breaking capacity (Ics)

- at 1000/1150 V

0 kA

Certificates

General Product Approval			EMC	Declaration of Conformity	
 CCC	 VDE	 EAC	sonstig	 RCM	 EG-Konf.

Test Certificates	Shipping Approval				
Typprüfbescheinigung/Werkszeugnis	sonstig	 ABS	 BUREAU VERITAS	 GL	 LRS

Shipping Approval	other				
 RMRS	sonstig				

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA1110-4FD42-0KF0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA1110-4FD42-0KF0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA1110-4FD42-0KF0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

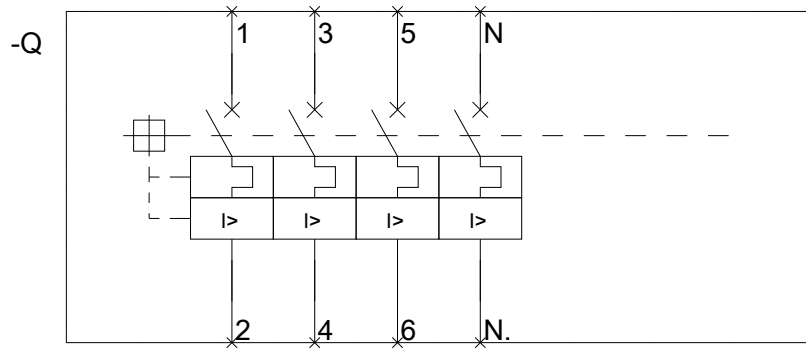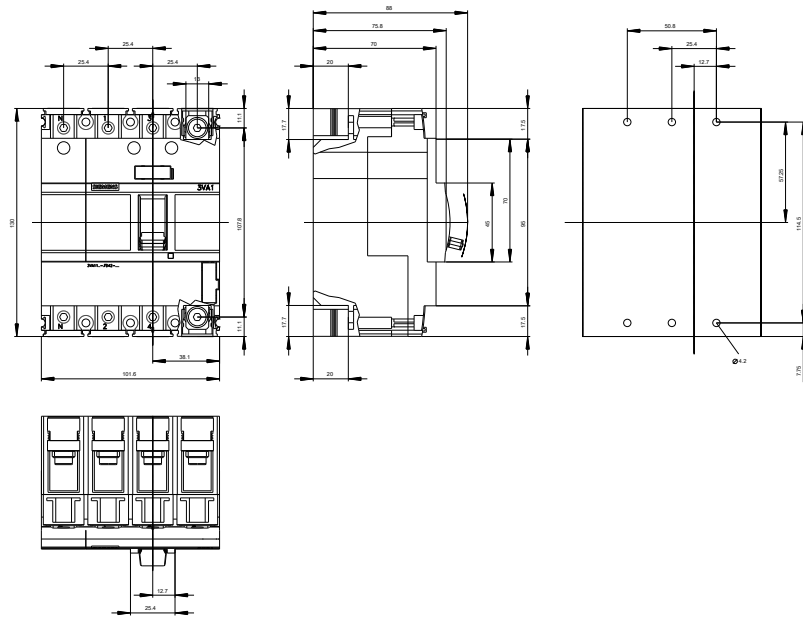

last modified:

10/24/2016