
Data sheet





Model	
product brandname	SENTRON
Product designation	Switch disconnector
Design of the product	in MCCB design
Number of poles	4
Design of the auxiliary release	Undervoltage release (UVR)
Design of the auxiliary switch	2 auxiliary switches HQ

General technical data	
Tension assignée d'isolement Ui	800 V
Max. rated operational voltage Ue with AC 50/60Hz	690 V
Max. rated operational voltage Ue with DC	600 V
Active power loss / for rated value of the current / at AC / in hot operating state / per device	57 W
Mechanical service life (switching cycles) / typical	15 000
Product function	
• communication function	No

Electricity	
Courant permanent assigné lu	250 A

lechanical Design						
Height	158 mm	158 mm				
Width	140 mm					
Depth	70 mm					
Connections						
Arrangement of electrical connectors / for main current circuit	Front terminal					
Type of electrical connection / for main current circuit	busbar connection					
Auxiliary circuit						
Product component						
 undervoltage release 	Yes					
Voltage trigger	No					
undervoltage release with leading contact	No					
Trip indicator	No					
Number of CO contacts / for auxiliary contacts	2					
Accessories						
Product extension / optional / motor drive	Yes					
Environmental conditions						
Protection class IP / on the front	IP40					
Ambient temperature						
 during operation / minimum 	-25 °C					
• during operation / maximum	70 °C					
during storage / minimum	-40 °C					
• during storage / maximum	80 °C					
Certificates						
Equipment marking / acc. to DIN EN 81346-2	Q					
General Product Approval	EMC		Declaration of Conformity	Test Certificates		
	^			sonstig		
			(+			
CCC VDE LIIL	RCM	<u>ا</u>	EG-Konf.			

other

sonstig

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA1225-1AA42-0DC0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3VA1225-1AA42-0DC0/all


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA1225-1AA42-0DC0


CAx-Online-Generator


http://www.siemens.com/cax

Tender specifications


http://www.siemens.com/specifications









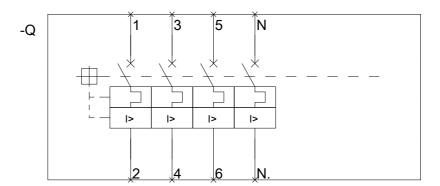

last modified: 10/26/2016