



CIRCUIT BREAKER 3VA2 IEC FRAME 100 BREAKING CAPACITY CLASS M ICU=55KA @ 415 V 4POLE, LINE PROTECTION ETU330, LIG, IN=63A OVERLOAD PROTECTION IR=25A ...63A SHORT CIRCUIT PROTECTION II=1,5...12 X IN NEUTRAL PROTECTION ADJUSTABLE(OFF,100%) GROUNDFAULTPROTECTION IG=0,25... 1 X IN, TG=0,1/0,3S CABLE CONNECTION UNDERVOLTAGE RELEASE 208-230 V AC 50/60 HZ 4 AUXILIARY SWITCH

Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates	
 VDE		 RCM	 EG-Konf.	Typprüfbescheinigung/Werkszeugnis sonstig

Shipping Approval	other
 ABS  LRS	sonstig

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)


<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA2063-5HM46-0DE0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WW/view/en/3VA2063-5HM46-0DE0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2063-5HM46-0DE0

CAX-Online-Generator
<http://www.siemens.com/cax>

Tender specifications
<http://www.siemens.com/specifications>

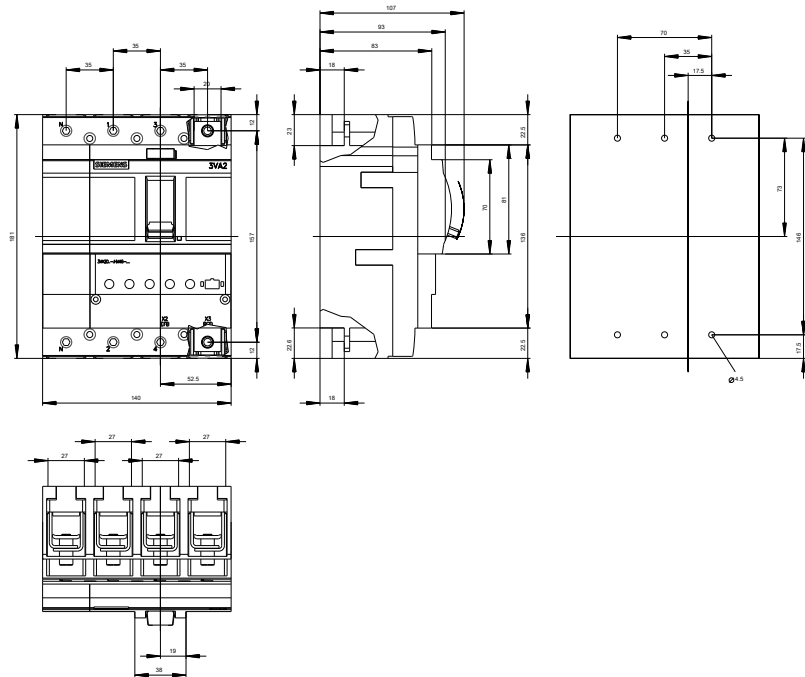

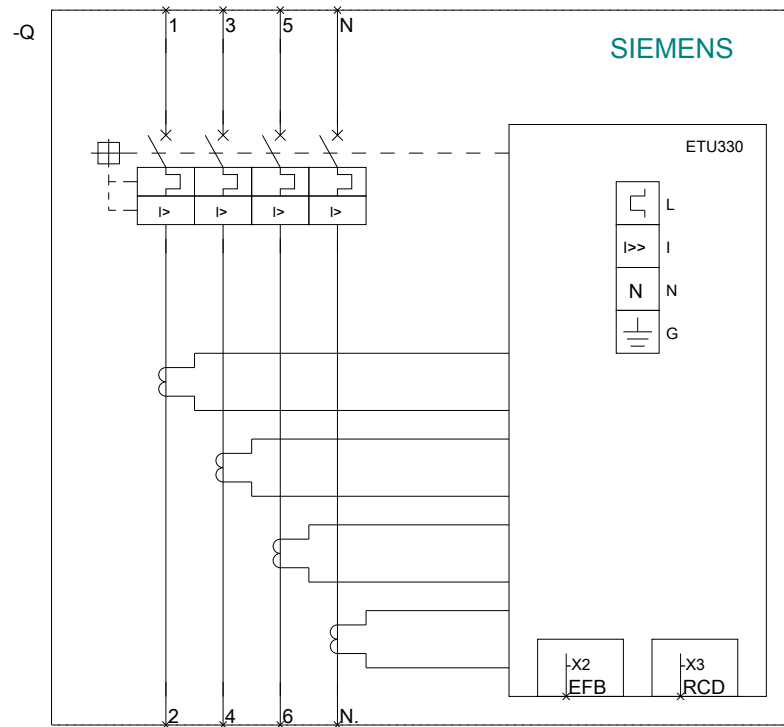

last modified:

11/01/2016