



CIRCUIT BREAKER 3VA2 IEC FRAME 160 BREAKING CAPACITY
CLASS H ICU=85KA @ 415 V 3POLE, LINE PROTECTION
ETU330, LIG, IN=160A OVERLOAD PROTECTION IR=63A ...160A
SHORT CIRCUIT PROTECTION II=1,5...10 X IN
GROUNDFAULTPROTECTION IG=0,2... 1 X IN, TG=0,1/0,3MS
CABLE CONNECTION 1 AUXILIARY SWITCH 1 TRIP ALARM
SWITCH

Certificates

General Product Approval		EMC	Declaration of Conformity	Test Certificates
				
CCC	VDE		RCM	EG-Konf.
Test Certificates		Shipping Approval		
sonstig		sonstig		
				
ABS		LRS		

[Typprüfbescheinigung/Werkszeugnis](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA2116-6HM36-0AF0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA2116-6HM36-0AF0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2116-6HM36-0AF0


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

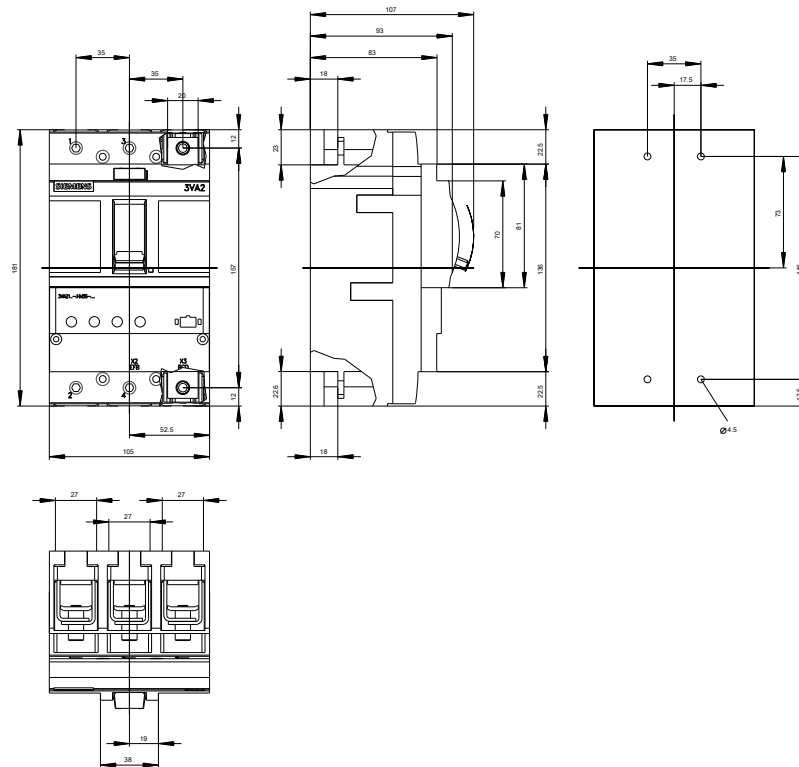

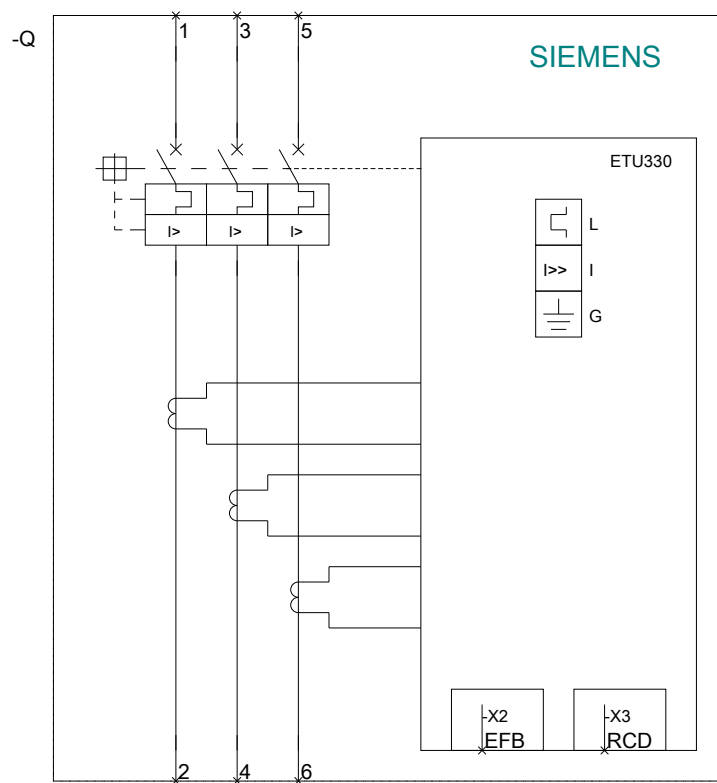

last modified:

11/01/2016