



CIRCUIT BREAKER 3VA2 IEC FRAME 160 BREAKING CAPACITY CLASS C ICU=110KA @ 415 V 3-POLE, MOTOR PROTECTION ETU350M, LSI, IN=63A OVERLOAD PROTECTION IR=25,2A ...63A SHORT CIRCUIT PROTECTION ISD=3... 15 X IR, II=15 X IN CABLE CONNECTION UNDERVOLTAGE RELEASE (UVR) 208-230 V AC 50/50 HZ 2 AUXILIARY SWITCH HQ 1 TRIP ALARM SWITCH HQ

| Model                                          |                             |
|------------------------------------------------|-----------------------------|
| product brandname                              | SENTRON                     |
| Product designation                            | Molded case circuit breaker |
| Design of the product                          | Motor protection            |
| Design of the overcurrent release              | ETU350M                     |
| Protective function of the overcurrent release | LSI                         |
| Number of poles                                | 3                           |
| Design of the auxiliary release                | Without auxiliary release   |
| Design of the auxiliary switch                 | 2 auxiliary switches HP     |

| General technical data                                                                           |        |
|--------------------------------------------------------------------------------------------------|--------|
| Tension assignée d'isolement Ui                                                                  | 800 V  |
| Max. rated operational voltage Ue with AC 50/60Hz                                                | 690 V  |
| Operating power / at AC-3 / at 400 V                                                             | 22 W   |
| Active power loss / for rated value of the current / at AC / in hot operating state / per device | 75 W   |
| Mechanical service life (switching cycles) / typical                                             | 20 000 |
| Electrical endurance (switching cycles) / at AC-1 / at 380/415 V 50/60 Hz                        | 12 000 |
| Neutral conductors / upgradeable/retrofitable                                                    | No     |

|                                 |         |
|---------------------------------|---------|
| Ground fault monitoring version | Without |
| Product function                |         |
| • communication function        | No      |
| • Phase failure detection       | Yes     |
| • other measurement function    | No      |
| Net weight                      | 2.43 kg |

#### Electricity

|                                                                   |         |
|-------------------------------------------------------------------|---------|
| Max. rated operational voltage of the size of the circuit-breaker | 160 A   |
| Courant permanent assigné lu                                      | 63 A    |
| Operating current                                                 |         |
| • at 40 °C                                                        | 63 A    |
| • at 45 °C                                                        | 63 A    |
| • at 50 °C                                                        | 63 A    |
| • at 55 °C                                                        | 60.48 A |
| • at 60 °C                                                        | 59.22 A |
| • at 65 °C                                                        | 57.96 A |
| • at 70 °C                                                        | 56.7 A  |

#### Switching capacity according to IEC 60947

|                                                           |         |
|-----------------------------------------------------------|---------|
| Switching capacity class of the circuit breaker           | C       |
| Maximum short-circuit current breaking capacity (Icu)     |         |
| • at 240 V                                                | 150 kA  |
| • at 415 V                                                | 110 kA  |
| • at 440 V                                                | 110 kA  |
| • at 500 V                                                | 85 kA   |
| • at 690 V                                                | 25 kA   |
| Operational short-circuit current breaking capacity (Ics) |         |
| • at 240 V                                                | 150 kA  |
| • at 415 V                                                | 110 kA  |
| • at 440 V                                                | 110 kA  |
| • at 500 V                                                | 85 kA   |
| • at 690 V                                                | 25 kA   |
| Short-circuit current making capacity (Icm)               |         |
| • at 240 V                                                | 330 kA  |
| • at 415 V                                                | 242 kA  |
| • at 440 V                                                | 242 kA  |
| • at 500 V                                                | 187 kA  |
| • at 690 V                                                | 52.5 kA |

#### Adjustable parameters

|                                             |      |
|---------------------------------------------|------|
| Adjustable response value current / Ig min. | 25 A |
|---------------------------------------------|------|

|                                                                    |        |
|--------------------------------------------------------------------|--------|
| Adjustable response value current / I <sub>g</sub> min.            | 63 A   |
| Adjustable response value current / I <sub>g</sub> min.            | 4      |
| Adjustable response value current / I <sub>g</sub> min.            | 17     |
| Adjustable response value current / I <sub>g</sub> min.            | 189 A  |
| Adjustable response value current / I <sub>g</sub> min.            | 945 A  |
| Short-term delayed / tripping switchable / I <sub>2t</sub> =ON/OFF | No     |
| Adjustable response value current / I <sub>g</sub> min.            | 0.03 s |
| Adjustable response value current / I <sub>g</sub> min.            | 0.03 s |
| Adjustable response value current / I <sub>i</sub> min.            | 945 A  |
| Adjustable response value current / I <sub>i</sub> max.            | 945 A  |

### Mechanical Design

|        |        |
|--------|--------|
| Height | 181 mm |
| Width  | 105 mm |
| Depth  | 86 mm  |

### Connections

|                                                                 |                |
|-----------------------------------------------------------------|----------------|
| Arrangement of electrical connectors / for main current circuit | Front terminal |
| Type of electrical connection / for main current circuit        | Box terminal   |

### Auxiliary circuit

|                                                |    |
|------------------------------------------------|----|
| Product component                              |    |
| • undervoltage release                         | No |
| • Voltage trigger                              | No |
| • undervoltage release with leading contact    | No |
| • Trip indicator                               | No |
| Number of CO contacts / for auxiliary contacts | 2  |

### Accessories

|                                                   |                                    |
|---------------------------------------------------|------------------------------------|
| Product extension / optional / motor drive        | Yes                                |
| Manufacturer's article number                     |                                    |
| • of the supplied basic switch                    | <a href="#">3VA2163-7MN36-0AA0</a> |
| • of the integrated auxiliary switch/alarm switch | <a href="#">3VA9988-0AA11</a>      |

### Environmental conditions

|                                    |        |
|------------------------------------|--------|
| Protection class IP / on the front | IP40   |
| Ambient temperature                |        |
| • during operation / minimum       | -25 °C |
| • during operation / maximum       | 70 °C  |
| • during storage / minimum         | -40 °C |
| • during storage / maximum         | 80 °C  |

### Certificates

|                                            |   |
|--------------------------------------------|---|
| Equipment marking / acc. to DIN EN 81346-2 | Q |
|--------------------------------------------|---|

| General Product Approval                                                                 |                                                                                          | EMC                                                                               | Declaration of<br>Conformity                                                             | Test<br>Certificates                                                                            |
|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| <br>CCC | <br>VDE |  | <br>RCM | <br>EG-Konf. |

[sonstig](#)

|       |
|-------|
| other |
|-------|

[sonstig](#)

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA2163-7MN36-0AB0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3VA2163-7MN36-0AB0/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA2163-7MN36-0AB0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2163-7MN36-0AB0)


**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

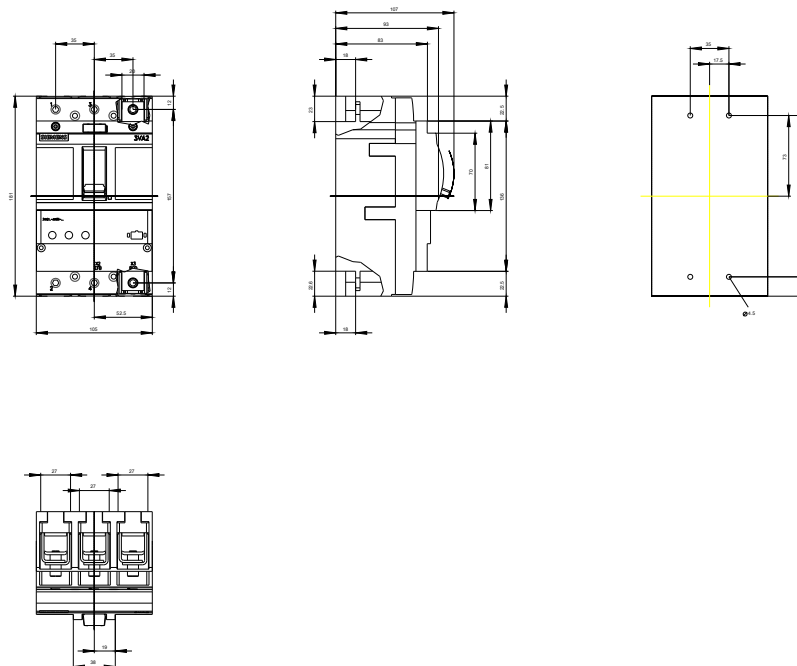

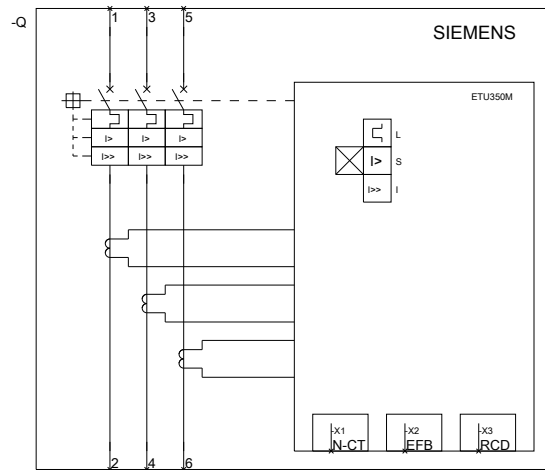

Siemens

3VA2xxx-xMN3x-0AA0

Format / Size: Hybrid quer

last modified:

10/29/2016