



CIRCUIT BREAKER 3VA2 IEC FRAME 250 BREAKING CAPACITY
CLASS C ICU=110KA @ 415 V 3POLE, LINE PROTECTION
ETU330, LIG, IN=250A OVERLOAD PROTECTION IR=100A ...250A
SHORT CIRCUIT PROTECTION II=1,5...10 X IN
GROUNDFAULTPROTECTION IG=0,2... 1 X IN, TG=0,1/0,3MS
BUSBAR CONNECTION SHUNT TRIP LEFT 24 V AC 50/60 HZ /
12-30 V DC 2 AUXILIARY SWITCH 1 TRIP ALARM SWITCH 1
ELECTRICAL ALARM SWITCH

Certificates

General Product Approval			EMC	Declaration of Conformity	Test Certificates
					Typprüfbescheinigung/Werkszeugnis
CCC	VDE		RCM	EG-Konf.	
Test Certificates	Shipping Approval		other		
sonstig			sonstig		
	ABS	LRS			

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA2225-7HM32-0HL0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA2225-7HM32-0HL0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2225-7HM32-0HL0


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

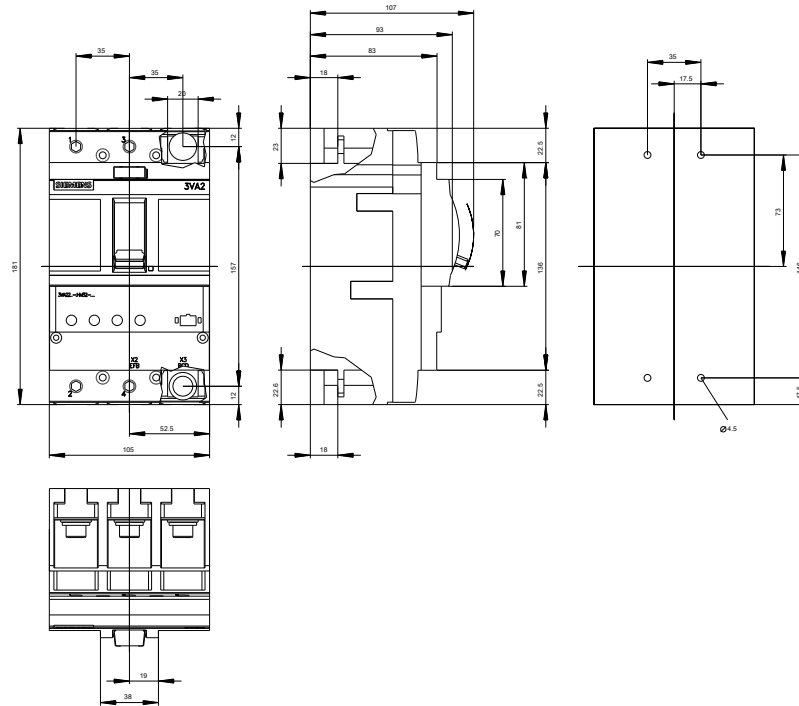

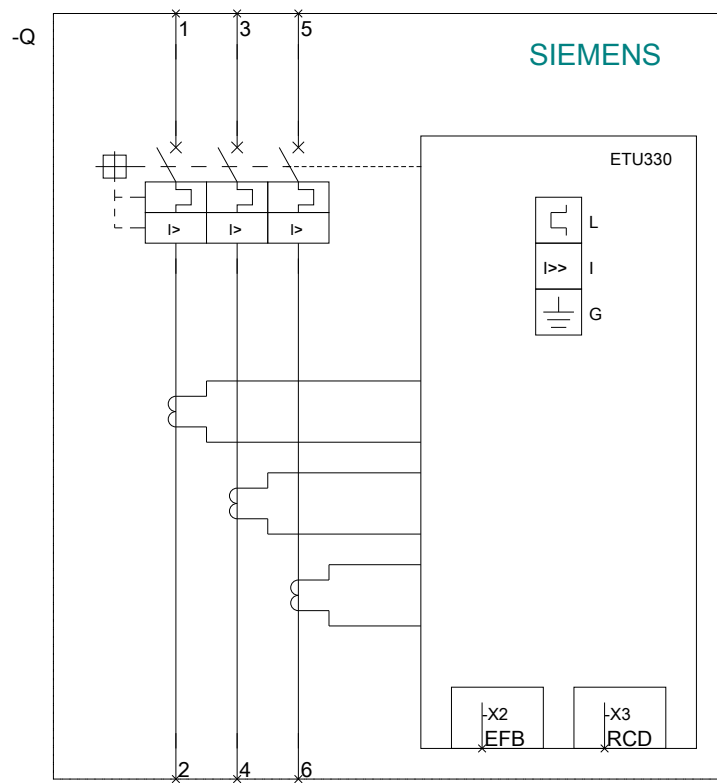

last modified:

10/29/2016