



CIRCUIT BREAKER 3VA2 IEC FRAME 400 BREAKING CAPACITY
CLASS M ICU=55KA @ 415 V 4-POLE, LINE PROTECTION
ETU350, LSI, IN=250A OVERLOAD PROTECTION IR=100A ...250A
SHORT CIRCUIT PROTECTION ISD=1,5... 10 X IR, II=12 X IN
NEUTRAL PROTECTION ADJUSTABLE(OFF,50%,100%) BUSBAR
CONNECTION 2 AUXILIARY SWITCH 1 TRIP ALARM SWITCH

Certificates

General Product Approval			EMC	Declaration of Conformity	Test Certificates
 CCC	 VDE		 RCM	 EG-Konf.	Typprüfbescheinigung/Werkszeugnis

Test Certificates	Shipping Approval				
sonstig	 ABS	 BUREAU VERITAS	 GL	 LRS	 RMRS

other
sonstig

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA2325-5HN42-0AJ0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA2325-5HN42-0AJ0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2325-5HN42-0AJ0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

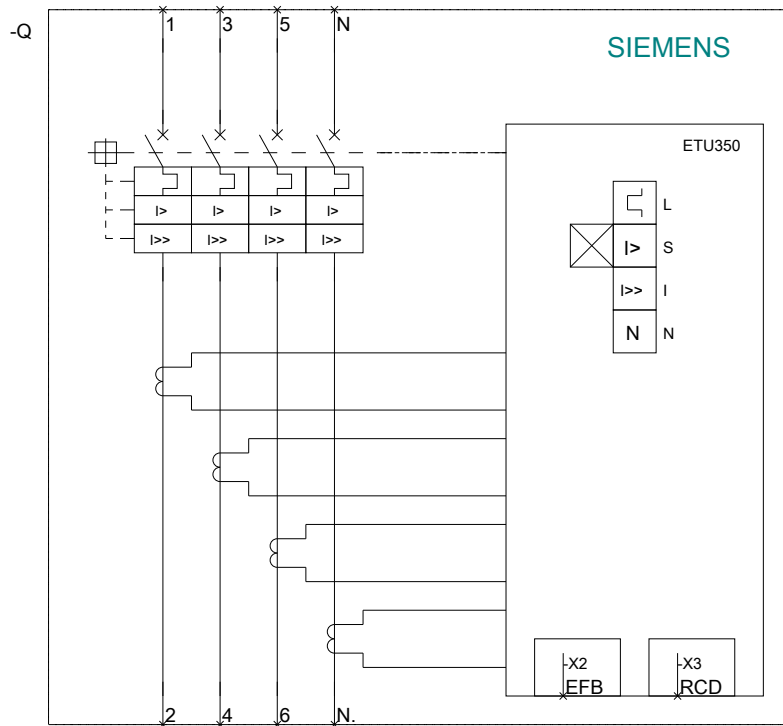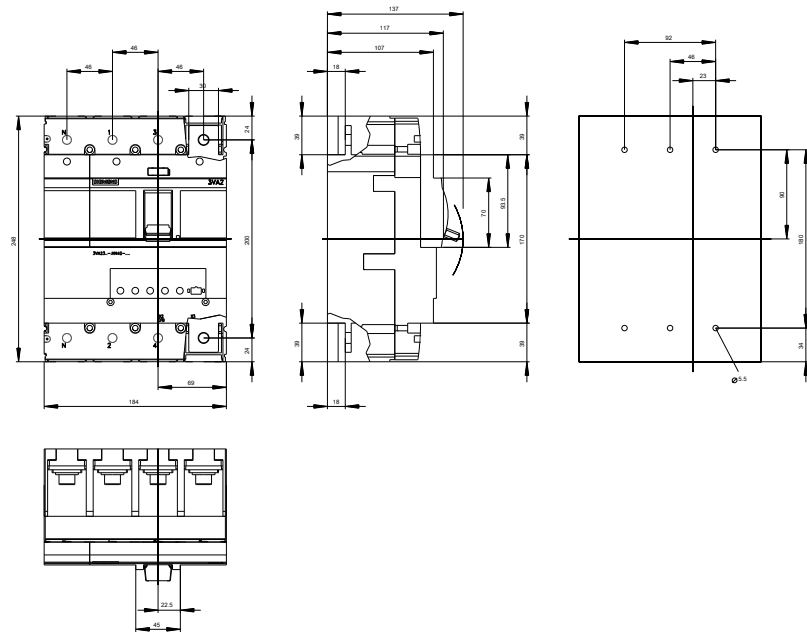

last modified:

11/01/2016