



CIRCUIT BREAKER 3VA2 IEC FRAME 400 BREAKING CAPACITY CLASS M ICU=55KA @ 415 V 3-POLE, LINE PROTECTION ETU850, LSI, IN=250A OVERLOAD PROTECTION IR=100A ...250A SHORT CIRCUIT PROTECTION ISD=0,6..10X IN, II=1,5..12X IN NEUTRAL PROTECTION OPTIONAL WITH EXT. CT;UPTO 160% BUSBAR CONNECTION

| General Product Approval                                                                 |                                                                                          |                                                                                   | EMC                                                                                      | Declaration of Conformity                                                                       | Test Certificates                                 |
|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------|
| <br>CCC | <br>VDE |  | <br>RCM | <br>EG-Konf. | <a href="#">Typprüfbescheinigung/Werkszeugnis</a> |

| Test Certificates       | Shipping Approval                                                                        |                                                                                                     |                                                                                         |                                                                                            |                                                                                             |
|-------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| <a href="#">sonstig</a> | <br>ABS | <br>BUREAU VERITAS | <br>GL | <br>LRS | <br>RMRS |

| other                   |
|-------------------------|
| <a href="#">sonstig</a> |

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA2325-5KP32-0KE0>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA2325-5KP32-0KE0/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA2325-5KP32-0KE0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2325-5KP32-0KE0)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

<http://www.siemens.com/specifications>

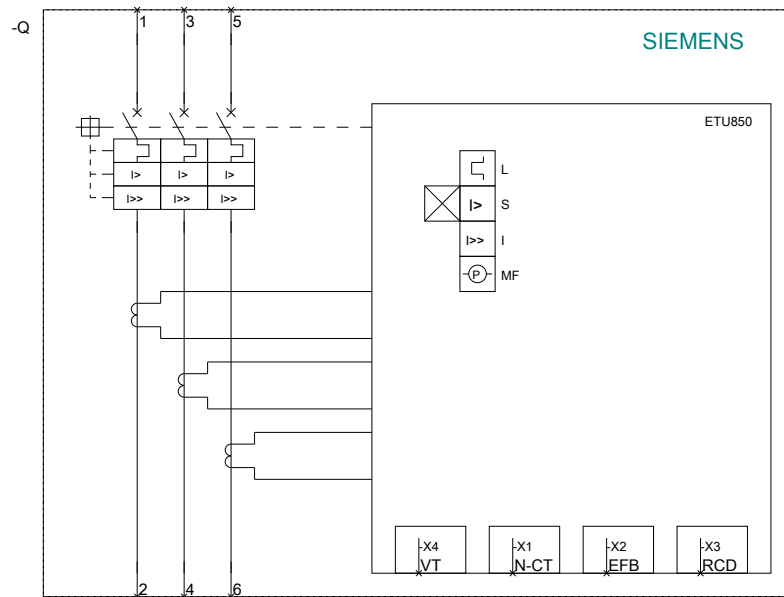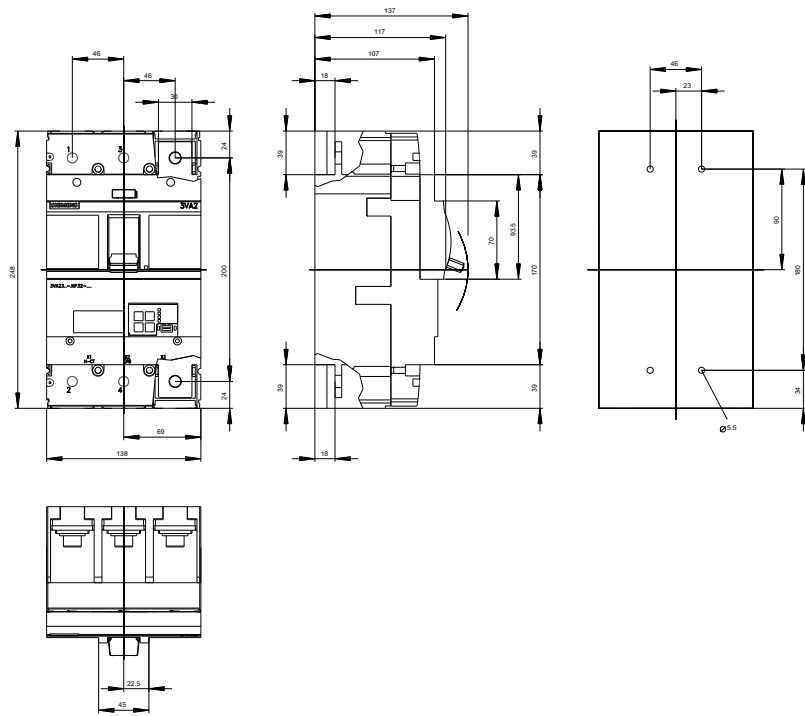

**last modified:**

10/29/2016