



CIRCUIT BREAKER 3VA2 IEC FRAME 630 BREAKING CAPACITY CLASS C ICU=110KA @ 415 V 3-POLE, MOTOR PROTECTION ETU860M, LSIG, IN=400A OVERLOAD PROTECTION IR=160A ...400A SHORT CIRCUIT PROTECTION ISD=1,2... 15 X IN, II=15 X IN NEUTRAL PROTECTION OPTIONAL WITH EXT. CT,UPTO 160% GROUND-FAULT, SWITCHABLE IG=0,2... 1 X IN, TG=0,05-0,8MS BUSBAR CONNECTION SHUNT TRIP LEFT 208-277 V AC 50/60 HZ 1 AUXILIARY SWITCH 1 TRIP ALARM SWITCH 1 ELECTRICAL ALARM SWITCH

Certificates

General Product Approval		EMC	Declaration of Conformity	Test Certificates
				
CCC	VDE		RCM	EG-Konf.

[sonstig](#)

other

[Bestätigungen](#) [sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)


<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA2440-7MQ32-0KK0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WW/view/en/3VA2440-7MQ32-0KK0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2440-7MQ32-0KK0

CAX-Online-Generator
<http://www.siemens.com/cax>

Tender specifications
<http://www.siemens.com/specifications>

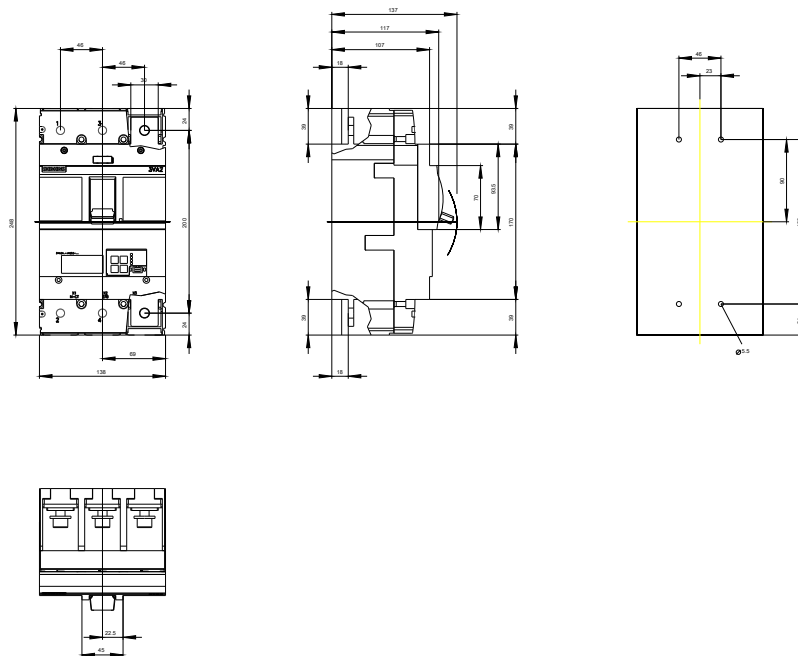

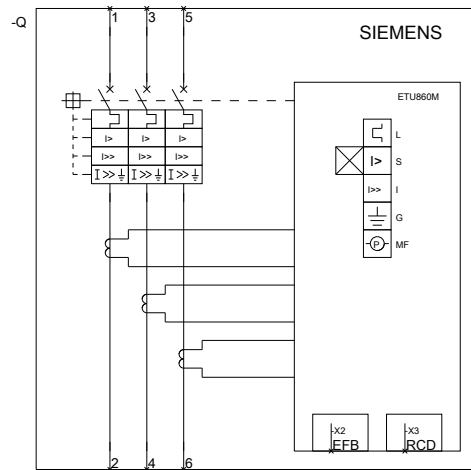

Siemens

3VA2xxx-xMQ3x-0AA0

Format / Size: Hybrid quer

last modified:

10/29/2016