

circuit breaker 3VA2 IEC frame 1000 breaking capacity class M
Icu=55kA @ 415V 3-pole, line protection ETU320, LI, In=800A
overload protection Ir=320A...800A short-circuit protection Ii=1.5...12
x In nut keeper kit undervoltage release (UVR) 24V DC



Model	
Product brand name	SENTRON
Product designation	Molded case circuit breaker

Certificates		
General Product Approval	EMC	Declaration of Conformity
 CCC	 VDE	Miscellaneous
	 EAC	 RCM
		 EG-Konf.

Test Certificates	Shipping Approval	other
Miscellaneous	 LRS	Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2580-5HL32-0BA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA2580-5HL32-0BA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2580-5HL32-0BA0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

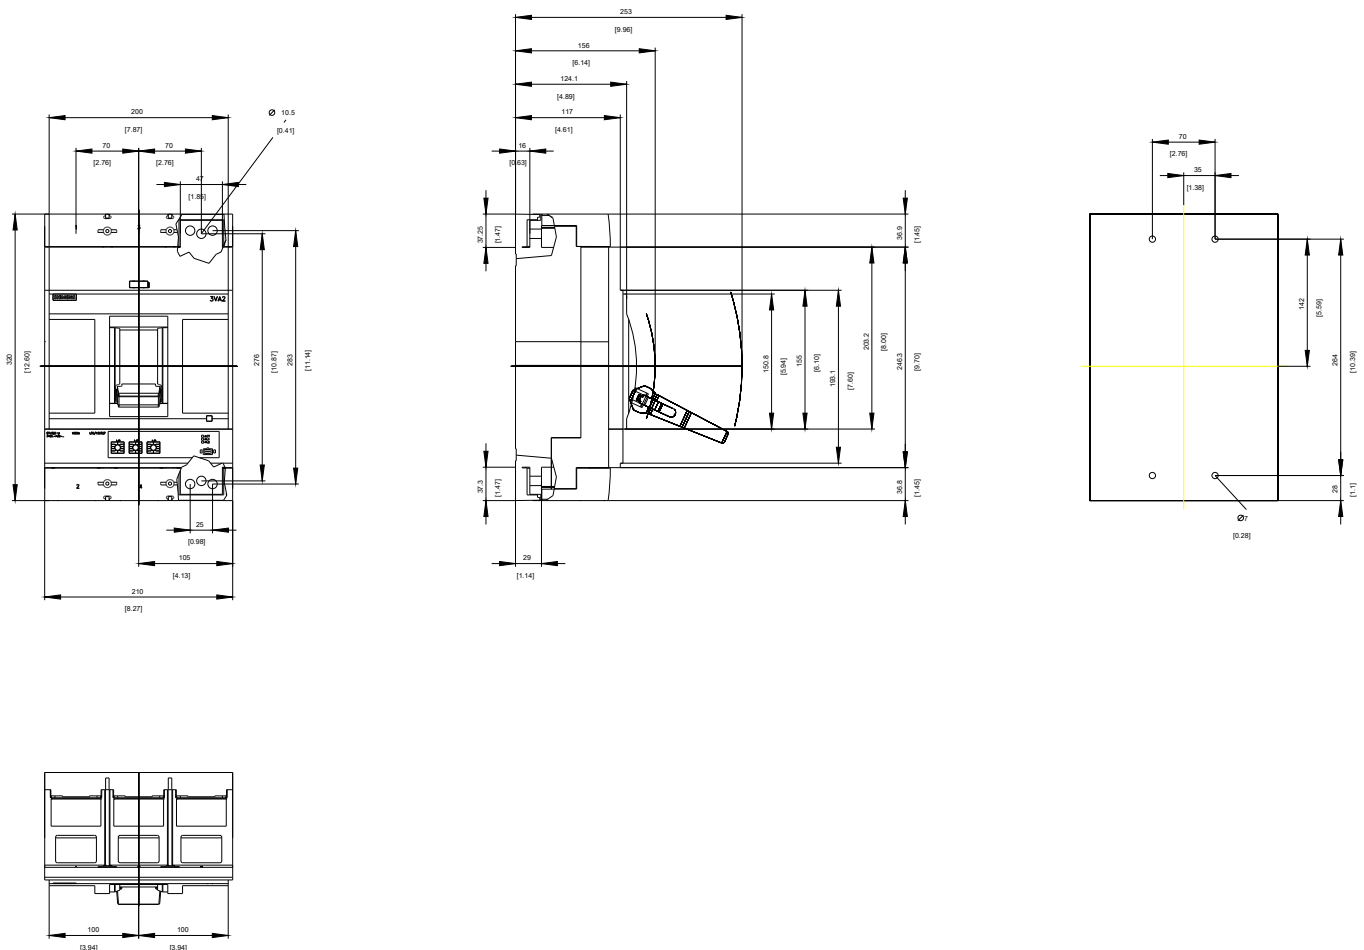

last modified:

01/10/2019